

FORMER INDUSTRIAL BROWNFIELDS PROPERTY

COMMERCE PARK

PENDER COUNTY, NORTH CAROLINA

**DECOMISSIONING AND DEMOLITION LUMP SUM/UNIT RATE
PROPOSAL**

REQUEST FOR PROPOSAL

December 2021

Prepared By:

**Wood Environment & Infrastructure Solutions, Inc.
5710 Oleander Drive Suite 110
Wilmington, NC 28403**

**LUMP SUM/UNIT RATE PROPOSAL
DECOMMISSIONING AND DEMOLITION OF STRUCTURES, ROADS
AND UNDERGROUND UTILITIES
Pender County, North Carolina Request for Proposal 2021-0243**

INDEX

SECTION I BIDDER INFORMATION

- Instructions To BIDDERS
- Proposal Bid Forms
 - Attachment I-1- Lump Sum/Unit Rate Cost Proposal Breakdown
 - Attachment I-2- Billing Schedule
 - Attachment I-3- Contractor Safety Evaluation Package
 - Attachment I-4 -Bidder Proposal Checklist

SECTION II CONTRACT

- Pender County Purchase Order Terms and Conditions
- Exhibit A - Prime Agreement Special Conditions
 - Schedule A: Form of Contractor's Release, Waiver, and Affidavit
 - Schedule B: Form of Contractor's Final Release and Waiver of Claims
- Substance Abuse and Prevention Policy

SECTION III SCOPE OF WORK/GENERAL REQUIREMENTS

- **Specification No. 01 - Summary of Work**
 - Part 1 – General
 - Part 2 – Products
 - Part 3 – Execution
 - Part 4 – General Specifications
 - Part 5 – Intent
 - Part 6 – Work Not Included
 - Part 7 – Work Summary
 - Part 8 – Bid Items Included
 - 8.1 - General Requirements
 - 8.2 - Mobilization, Site Setup, Work Plans, Submittals and Permits
 - 8.3 – Implement Site Wide Erosion/Sedimentation Control Plan, Remove Woody Vegetation from Work Area: Grubbing/Chipping and Rough-Cut Mowing
 - 8.4 – Confirmation of Utility Disconnects Terminations Completed By Duke Energy
 - 8.5 – Environmental Waste Removal, Transportation and Disposal
 - 8.6 – Universal Waste Removal, Transportation and Disposal
 - 8.7 – Demolition, Transportation and Disposal/Recycling: Remove Roof from

One Small Pumphouse Building with Asbestos Containing Material,
Remove All Site Buildings and Contents, All Light Poles and
Foundations, All Asphalt Pavement and Concrete Curbing and
Sidewalks, Truck Scale, Guard Shack and Chain-Link Fence / Gates and
Pedestrian Turnstile

- 8.8 – Above Ground Storage Tanks (ASTs) and Ancillaries –
Decommissioning and Demolition, Loading, Transportation and
Disposal
- 8.9 – Above Ground Concrete Structures – Secondary Containment,
Structures, Foundation Demolition, Debris Loading, Transportation
and Disposal
- 8.10 – Subgrade Utilities and Infrastructure Removal, Transportation and
Disposal as Illustrated on Subsurface Utility Drawings
- 8.11 – Raw Water Pond Water Drainage One Pond, Backfilling and
Compaction of Two Ponds and Below Ground Utility Excavation, Site
Restoration,
- 8.12 – Demobilization, Project Closeout Submittal and Contract Closeout
- 8.13 – Performance Payment and Bond
- 8.14 – Recyclable Material Credit

Part 9 – Valued Engineered Cost Proposal (VECP)

Part 10 - Drawing Index

Part 11 - Appendices

Appendix A – Photo Journal of Structures for Demolition

Appendix B – Regulated Building Materials Evaluation Report

Appendix C – Permit Applications

Appendix D – Survey Utility Engineering (SUE) Report

Specification No. 02 Decommissioning and Demolition Requirements

**FORMER INDUSTRIAL BROWNFIELDS
DECOMMISSIONING AND DEMOLITION
LUMP SUM/UNIT RATE PROPOSAL**

SECTION I BIDDER INFORMATION

LUMP SUM/UNIT RATE PROPOSAL

SECTION I BIDDER INFORMATION

Instructions to Bidders

A. Invitation to Bid

The Bidder is requested to submit a firm Lump Sum/Unit Rate Proposal for the decommissioning and demolition of the former industrial brownfields facility located at 101 Vitamin Drive off Hwy 421 in Pender County, North Carolina (Site) in accordance with all the requirements stipulated in the attached Bid Specification and documents.

The Successful Bidder shall furnish all the materials, equipment, labor, supervision, construction tools, equipment, temporary facilities to perform all work and render all services necessary for and incidental to the proper completion of the project contained in these Bid Documents.

Pender County intends to award the entire scope of work as a result of this event, however, Pender County reserves the right to award all, a subset, or none of the requirements via the RFP or to conduct another event for the requirements at its sole discretion. Suppliers should bid accordingly during the RFP phase of this process. An overall schedule is presented below and is detailed in the following sections:

Deadline	Date	Time (EST)
Virtual Pre-bid meeting	January 6, 2022	9:00 AM
Site pre-bid meeting	January 11, 2022	10:00 AM
Last day for questions	January 17, 2022	5:00 PM
Response to questions	January 19, 2022	
Bids due	January 25, 2022	5:00 PM
Recommendation of award	January 28, 2022	
Anticipated Notice to Proceed	January 31, 2022	
Projected mobilization date	February 8, 2022	
Substantial Completion	March 31, 2022	
Final Completion	April 4, 2022	

B. Proposal Due Date

The complete Proposal submittal for this request is due on January 25, 2022, at 5:00 p.m. EST.

No bids may be withdrawn after the above date and time for a period of 30 days. Pricing shall remain valid for 90 days after the bid opening.

The right is reserved by the County to accept or to reject any proposal and to waive irregularities in proposals.

Should the Bidder observe or determine conditions at the site or in the bidding documents that would require a change in the project, this information shall be presented to the Contractor prior to the submission of bids.

C. Pre-Bid Meeting

A mandatory pre-bid meeting will be conducted at the subject site on January 11, 2022, at 10:00 a.m. EST. The meeting will begin at the automatic gate to the site located at **101 Vitamin Drive, Wilmington, North Carolina 28401**. As part of this meeting, a visit to the site will occur to point out areas of work and evaluate existing conditions, including access. The purpose of the pre-bid meeting is to discuss with prospective Bidders the work to be performed, allow them to ask questions arising from their review of the Contract Documents, and provide them with an opportunity to inspect the site. The pre-bid meeting will be informational only. Any answers furnished will be issued as an addendum and will not become official until verified in writing.

D. Site Examination

It is required that Bidders examine the site prior to the submission of its bid to familiarize itself with the area, access, utilities and existing surface conditions.

All follow-up visits shall be coordinated with Mr. Chris Pruneau (910) 231-2955 or via email at chris.pruneau@woodplc.com

Bidder shall provide a minimum notification period of at least 2 working days to schedule the site visit.

E. Scope of Work

The scope of work in general includes mobilization and site setup. The scope of work includes removal of all existing above ground and below ground structures from the subject property. This includes removal of woody vegetation with the

demolition project site and implementation of the attached erosion and sedimentation control plan. The contractor will confirm the final electrical utility terminations by Duke Energy. Remove, transport and dispose of all environmental and universal waste and removal and disposal of one asbestos-containing roof. Removal and disposal of, demolition of all above ground site building and structures and their contents, remove all above ground storage tanks and concrete structures and underground structures including foundations, removal of piping and underground utilities, light pole removal, removal of all pavement, curbing and side walks, removal and disposal of all materials from bone yards, removal of existing chain link fencing, removal of all existing wastewater and water infrastructure, backfilling of two man-made ponds (one dry and one full of water), backfilling demolition excavations, backfilling of the post demolition loading rack area and site restoration. The scope of work includes transportation and disposal of construction debris, recycling of materials (e.g. metals, etc.).

The scope of the work to be performed is further defined, summarized, and otherwise set forth in Section III, and in various other documents and drawings that comprise this Request for Proposal. Further, the Bidder is held responsible for understanding the presentation of the included information contained in this Request for Proposal. It is the Bidder's responsibility to review the attached Bid Specification and documents in their entirety and obtain resolution of any questions or misunderstandings from the Contractor during the bid period.

The anticipated Notice to Proceed date is January 31, 2022. **Substantial Completion shall be accomplished on or before March 31, 2022 and Final Completion on or before April 4, 2022.**

F. General Instructions

1. The Successful Bidder will enter negotiation of a contract with Pender County to execute the project. A Work Order will be issued by Pender County to the Contractor for the specific work to be completed. The cost breakdown shall include applicable overhead, insurance, taxes (including Sales and/or Use Taxes), profit, etc. **SUBMISSION OF THE BIDDER'S PROPOSALS MUST BE IN THE FORM CONTAINED IN THIS RFP.**
2. Each Item of Work listed in the Lump Sum/Unit Rate Cost Proposal Breakdown is described and explained in detail in Section III, Scope of Work, and further specified in Section IV, Technical Specifications, of this Request for Proposal.
3. Bidder shall prepare and make part of its Proposal, **"AN ITEMIZED LIST OF ANY AND ALL EXCEPTIONS, ASSUMPTIONS, OR CORRECTIONS NECESSARY TO ALLOW SUBMISSION OF THIS PROPOSAL."** The omission of such a list will be the Bidder's acknowledgment that it fully understands all phases of the specified work and

accepts the completeness of all documents transmitted with and made part of the Bid Documents. Where such a list is submitted, the Proposal shall be considered a qualified Proposal.

4. In any instance where the Drawings and other documents of the Bid Documents are not sufficiently complete to allow the Bidder to submit a complete Proposal without excessive contingencies being applied for indefinite items, or with major assumptions being made by the Bidder, Bidder shall contact the Pender County/Wood for clarification before submitting its proposal.

G. Additional Proposal Requirements

The following submittals will be required to complete the Proposal and facilitate a full proposal evaluation.

1. Construction Planning Schedule
Bidder shall include a Preliminary Construction Planning Schedule with the bid and shall submit its bid based on that schedule. The planning schedule shall be formatted to include each work task contained as Bid Items in **Attachment I-1. Schedule is a very important consideration in the award of this contract. Pender County goal is to have the decommissioning and demolition scope of work in this demolition plan completed by April 1, 2022.**
2. Draft "Summary Work Plan"
Bidder shall submit with its proposal a draft "Summary Work Plan (Plan)" for the construction work. Bidder's Plan shall be structured to correlate with the Lump Sum/Unit Rate Proposal work item structure. The plan shall be written to provide clear and concise descriptive summaries of Bidder's plan to approach and execute all major work tasks contained in the Scope of Work. The Plan should not be longer than five (5) pages.
3. Experience and Key On-Site Personnel
Bidder shall provide an organization chart and specify the name of its intended Project Manager, Field Superintendent, Site Health & Safety Officer and QA/QC Officer with its Summary Work Plan.
4. Billing Schedule
Bidder shall submit a proposed payment/billing schedule for the project that coincides with the Bidder's Planning Schedule and Bidder's Proposal. The Bidder shall develop the Billing Schedule from the example form included in this Section as **ATTACHMENT I-2.**
5. List of Contractors/Safety Evaluation Packages
A list of all the lower tier contractors that the Bidder anticipates will be working on the project, along with the craft or work that will be performed, shall be provided in the space on the Bid Form.

6. **Equipment Rates**
Bidder shall furnish the Contractor with its proposal a list of applicable equipment daily, weekly, and monthly rates. Bidder shall also provide a mobilization-demobilization cost. Rates included in this list will be the basis for any possible Cost Plus Construction Change Order.

H. Bidder Questions

The procedure for requesting supplemental information and responses to questions formulated during the bidding process shall be as follows:

1. **All questions to be directed to chris.pruneau@woodplc.com**
2. All questions will be answered directly to the Bidder that is requesting the clarification or information. A compilation of all Bidder's questions will be issued to all Bidders as an addendum at some time prior to the Proposal Due Date.
3. **All Bidders' questions must be submitted before 5:00 p.m. EST on January 17, 2022.**

I. Bidder's Proposal Checklist

In order to ensure that the Bidder has completed all the forms and submittals that will be required for a full and complete Proposal Submittal, the Bidder shall review and complete the Check List included **(ATTACHMENT I-4)** in this Section. Proposal will be rejected if any of the required forms and submittals identified in this Section is not submitted with the Proposal.

J. Terms and Conditions

Work shall be completed under the provisions of Contract Agreement. The terms and conditions required for this project are detailed in the Contract Agreement (Attached Section II).

The Contractor shall provide performance and payment bonds equal to 100 percent of the work that are acceptable to Pender County.

K. Liquidated Damages

If the Contractor does not complete the work within the schedule noted below, the Contractor shall be subject to liquidated damages in the amount of \$2,000.00 per calendar day until the Work is completed. Liquidated damages are not a penalty, are cumulative, and represent a reasonable estimate of Contractor's extra costs and damages, which are difficult to estimate with accuracy in advance.

FORMER INDUSTRIAL BROWNFIELDS PROPERTY

COMMERCE PARK

PENDER COUNTY, NORTH CAROLINA

- PROPOSAL FORM -

FIRM LUMP SUM/UNIT RATE PROPOSAL

SUBMITTED BY:
(CONTRACTOR)

FOR

Request For Proposal No. **Decommissioning and Demolition 2021-0243**

Decommissioning and Demolition of Former Brownfields Facility Structures 101 Vitamin
Drive Hwy 421 Pender County, North Carolina

WOOD PROJECT NO. 6228-21-0243

DATED: _____

IMPORTANT NOTE: PROPOSALS MUST BE SUBMITTED ON THIS FORM

A. Proposal

The undersigned Bidder submits to Pender County, North Carolina it's Proposal for furnishing all materials, supervision, labor, construction tools, and necessary equipment to perform all work and services necessary for, and reasonably incidental to, the proper completion of all the items of work in accordance with the provisions, terms and conditions of/and as shown, described and contained in either the Lump Sum Contract and supporting documents as listed in the Specifications.

Total Firm Lump Sum/Unit Rate Bid

This is a complete bid. There are no exceptions to Bid Specifications Agreement for Decommissioning and Demolition Services and/or Exhibit "A" Special Conditions.

This is a qualified Bid. Attach an itemized list of any and all exceptions, assumptions, and/or corrections necessary to allow submission of this Proposal.

B. Breakdown

1. Proposal shall be provided with breakdown as shown in the attached Line-Item Cost Proposal Breakdown, **Table I-1**. (Attachment I-1)
2. The following taxes as applicable, are included above on all materials and/or labor furnished by Bidder and will be paid by the Bidder:

	Check if Applicable	Rate (%)	Total Tax on Materials	Total Tax on Labor
State Sales Tax				
Local Sales Tax				
Use Tax				
Other				

(A proportionate share of the above taxes, in the event of an award, would be billed to Pender County on each invoice submitted by Bidder and would be shown on the Detail of Billing as tax).

3. Names of proposed Contractors and work performed will be as follows:

Lower Tier Contractor(s) Name(s) & Location(s)	Craft Involved or Work to Be Performed

4. Number of working days required to mobilize after Notice to Proceed:
Number of working days after mobilization to start site activities at jobsite:
Number of working days estimated for final completion:
5. Any work beyond that defined in the scope contained in the Bid Documents or any changes in the plans and specifications (or deletions with respect thereto) which are authorized by Pender County in writing prior to the commencement thereof shall be performed by Bidder and paid for by Pender County, (or shall be allowed by Bidder as a credit) on one of the following bases at Wood's option:
- a. LUMP SUM: To be agreed upon.
 - b. UNIT PRICE: As may be agreed upon.
 - c. COST PLUS: Including authorized sub-contracted work as follows:
 - 1. Direct cost of labor including fringes, taxes, and insurance, plus percent (%) for overhead, profit, small tools as shown in Exhibit , and expendable supplies as shown in Exhibit .
 - 2. Direct cost of materials including the minimum rental cost of construction equipment, plus percent (%) for overhead and profit. Equipment rentals shall not exceed current rates established by the Associated Equipment Distributors or standard rates for the area, whichever is the lower rate.
 - 3. Direct cost of lower tier subcontracted work, plus percent (%) for overhead and profit.
 - 4. Taxes, bonds, insurance, and premium time shall be at Bidder's actual cost.
6. No home office expense shall be permitted unless authorized.

7. Bidder will operate with:

- a. Union Labor b. Non-Union Labor c. Both

8. Alternate Proposal: Alternate proposals are solicited where Bidder could propose a reduced firm Lump Sum price based upon acceptance by Pender County of alternate material(s) or construction techniques thereby reducing the cost of demolition. Details of alternates are to be specified and attached to this proposal.

9. Pender County reserves the right to reject any or all bids.

10. Bidder shall designate one of the following:

a. If Bidder is operating as an INDIVIDUAL:

1. Name of Firm: _____

2. Address of Firm: _____

3. Name of Owner: _____

b. If Bidder is operating as a PARTNERSHIP:

1. Name of Firm: _____

2. Address of Firm: _____

3. Names of All Partners: _____

c. If Bidder is operating as a CORPORATION:

1. Name of Firm: _____

2. Address of Firm: _____

3. State in which INCORPORATED: _____

This Proposal is submitted by the undersigned consistent with the requirements of the BidSpecification and the instructions contained herein.

Date

Bidder Name

Signature of Authorized

Representative

Name Title

LUMP SUM/UNIT RATE PROPOSAL

**SECTION I
BIDDER INFORMATION**

ATTACHMENT I-1:

FORMER INDUSTRIAL BROWNFIELDS PROPERTY

Lump Sum/Unit Rate Cost Proposal Breakdown

TABLE I- 1
LUMP SUM/UNIT RATE COST PROPOSAL BREAKDOWN
DECOMMISSIONING and DEMOLITION
FORMER INDUSTRIAL BROWNFIELDS PROPERTY
COMMERCE PARK
PENDER COUNTY, NORTH CAROLINA

Bid Item	Cost Code	Bid Item Description	Estimated Quantity	Unit Rate	Lump Sum Cost
8.1		General Requirements	1 LS	/LS	\$ -
8.2		Mobilization, Site Setup, Work Plans, Submittals and Permits	1 LS	/LS	\$ -
8.3		Site Wide Woody Vegetation Grubbing/ Chipping and Rough-Cut Mowing, and Implementation of Erosion Control Measures per attached Erosion Control Plan	1 LS	/LS	
8.4		Confirmation of Utility Disconnects Termination(s)	1 LS	/LS	\$ -
8.5		Environmental Waste Removal (soil, water and sediment), Transportation and Disposal at Licensed Facility <ul style="list-style-type: none"> • 90 tons of petroleum containing soil and 300 gallons of hydraulic oil and used waste oil • 97,000 gallons of water from wastewater basins and secondary containment systems • 270 tons of sediments from wastewater and secondary containment areas 	1 LS	/LS	\$ -
8.6		Universal Waste Removal, Transportation and Disposal Removal, Transportation and Disposal of Roof from Small Pump House Bldg with Asbestos Containing Roofing Material	1 LS	/LS	\$ -

8.7		Demolition, Transportation and Disposal/Recycling: All Buildings and their contents, Bldg Foundations and sumps, Light Poles/Foundations, Asphalt Paving and Concrete Curbing and Paving, Truck Scale and Chain-link Fence/ Gates, Guard House and Pedestrian Turnstile and Removal of all materials from boneyard areas	1 LS	/LS	\$ -
8.8		Above Ground Storage Tanks and ancillaries Decommissioning and Demolition Loading Transportation and Disposal	1 LS	/LS	\$ -
8.9		Above Ground Concrete Structures- Secondary Containment Structures, Foundations Demolition, Debris Loading and Disposal	1 LS	/LS	\$ -
8.10		Subgrade Utilities and Infrastructure Removal, Transportation and Disposal as Illustrated on Subsurface Utility Engineering (SUE) Report	1 LS	/LS	\$ -
8.11		Site Restoration, Soil Backfilling and Compaction of Two Firewater Ponds and Removal of Below Ground Structures	1 LS	/LS	\$ -
8.12		Demobilization, Project Closeout Submittal and Contract Closeout			
8.13		Performance Payment & Bond	1 LS	/LS	\$ -
8.14		Recyclable Material Credit	1 LS	/LS	\$ -
		Base Bid Total (Bid Items 8.1 through 8.14)	----- --	----- -----	\$ -

Notes:

1. Lump Sum Costs shall remain fixed for the life of the project. No provisions for escalation will be allowed.
2. LS = Lump Sum

Unit Price Items: the following unit price classification items may or may not have been specified as to quantity and technical requirements in the contract documents. These unit price items may be used in establishing additional costs due the contractor for site work to be done in addition to the scope of the work described in the contract documents and bid as part of the General Contractor's scope of work. These items will be at the discretion of the Owner and will be paid on actual quantities measured by the Owner or Owner's Representative.

These unit prices are to be submitted by the Contractor with the Bid.

Item	Description	Unit	Unit Price
1	Clearing and Grubbing	AC	\$
2	Topsoil Stripping, stockpile, redistribution	CY	\$
3	Silt Fence (Installed complete & in place)	LF	\$
4	#57 Stone	Ton	\$
5	Class "B" Rip-Rap	Ton	\$
6	On Site Suitable Material Excavation/Placement	CY	\$
7	Unsuitable Soil Removal/Disposal	CY	\$
8	Off-Site Topsoil Borrow	CY	\$
9	Removal, Transport and Disposal of Contaminated Water	Gallon	\$
10	Removal, Transport and Disposal of Contaminated Wastewater Sediment	Ton	\$
11	Removal, Transport and Disposal of Petroleum Contaminated Soil	Ton	\$

LUMP SUM/UNIT RATE PROPOSAL

SECTION I

BIDDER INFORMATION

ATTACHMENT I-2

Billing Schedule

ATTACHMENT I-2 BILLING SCHEDULE
FORMER INDUSTRIAL BROWNFIELDS PROPERTY
COMMERCE PARK
PENDER COUNTY, NC

Bid Item	Cost Code	Bid Item Description	MONTH1	MONTH 2	MONTH 3	MONTH 4	TOTAL
8.1		General Requirements					
8.2		Mobilization, Site Setup, Work Plans, Submittals and Permits					
8.3		Site Wide Woody Vegetation Grubbing/Chipping and Rough-Cut Mowing, Implementation of Erosion Control Measures Per Attached Erosion Control Plan					
8.4		Utility Disconnects Termination(s) Confirmation					
8.5		Environmental Waste Removal, Transportation and Disposal					
8.6		Universal Waste Removal, Transportation and Disposal					
8.7		Demolition, Transportation and Disposal/Recycling: All Buildings and their contents, Bldg Foundations and sumps, Light Poles/Foundations, Asphalt Paving and Concrete Curbing, Sidewalks and Paving, Truck Scale and Chain-link Fence/ Gates, Guard House and Pedestrian Turnstile Demolition, Transportation and Disposal/Recycling					
8.8		Above Ground Storage Tanks and Ancillaries Decommissioning and Demolition Loading Transportation and Disposal					
8.9		Above Ground Concrete Structures- Secondary Containment Structures, Foundations Demolition, Debris Loading, Transportation and Disposal					
8.10		Subgrade Utilities and Infrastructure Removal, Transportation and Disposal as Illustrated on Subsurface Utility					

8.11		Site Restoration, Backfilling and Compaction of Two Ponds and Below Ground Utility Excavation					
8.12		Demobilization, Project Closeout Submittal and Contract Closeout					
8.13		Performance Payment & Bond					
8.14		Recyclable Material Credit					
		MONTHLY TOTAL - INVOICED					
		CUMULATIVE TOTAL INVOICED					
		MONTHLY PAYMENT					
		PAYMENT- CUMULATIVE					

NOTE: PAYMENT SCHEDULE BASED ON SUBCONTRACT TERMS

LUMP SUM/UNIT RATE PROPOSAL

SECTION I BIDDER INFORMATION

ATTACHMENT I-3: FORMER INDUSTRIAL BROWNFIELDS PROPERTY

COMMERCE PARK

PENDER COUNTY, NC

Contractor Safety Evaluation Package

Health, Safety, Security and Environment Evaluation Form

Company Name: _____

☐ MASTER for all projects

☐ Proposal/Specific Project: _____

This form is not required for supplies and low risk services. Low risk is defined as services where there is an absence of critical hazards (ground disturbances, work at heights, construction, confined spaces, operating equipment, electrical hazard, traffic control or proximity to traffic, toxic chemicals, proximity to overhead power lines, etc.) or as otherwise defined by Wood.

1. WORK ACTIVITIES

Check the type of general
services you will provide

Construction of Buildings (236)	Heavy and Civil Engineering Construction (237)
Heavy and Civil Engineering Construction (237)	Construction Services - Specialty Trade (238)
Drilling (238)	Consulting Services (541)
Laboratory Services including Field Work (541)	Surveying Services (541)
Remediation Services (562)	Waste Transportation Services (562)

Number of employees in
company: _

2. EMR

List your firm's Experience Modification Rate (EMR) for the past five years.

20__ 20__ 20__ 20__ 20__

NOTE: All employers must have some form of Workers' Compensation Insurance which is tied to the EMR. Attach EMR letter from underwriter. If you do not have an EMR, please provide an explanation. _____

3. SAFETY PERFORMANCE

Use your OSHA's Form 300 to fill in safety statistics for the last five full years:

		20__	20__	20__	20__	20__
a.	Hours Worked					
b.	Number of Recordable cases	_____	_____	_____	_____	_____

c.	Number of lost workday cases	_____	_____	_____	_____	_____
d.	Number of restricted/transferred cases	_____	_____	_____	_____	_____
e.	Number of fatalities	_____	_____	_____	_____	_____

If you do not maintain an OSHA 300 Log, use OSHA's definitions as defined in 29 CFR 1904 associated with lost time, restricted duty and medical treatment beyond first aid to complete the above table.

4. SAFETY MATURITY

4A. Do you have a written safety program/ manual?

No Yes If yes, submit a copy of your Table of Contents

4B. Do you hold project-specific safety meetings, such as pre-job briefs, plan-of-the-day, toolbox, or tailgate?

No Yes If yes, how often?

Daily Weekly Bi-weekly Monthly Less often, as needed

4C. Do you conduct project safety inspections and audits to ensure compliance with your company's safety requirements? No Yes

If yes, who conducts the inspections and audits?

NAME: _____

HOW OFTEN?

TITLE: _____

4E. Will you have a designated safety professional involved with the work?

No Yes

5. SAFETY TRAINING PROGRAMS

<p>What training do you provide for your employees?</p> <ul style="list-style-type: none">a. Head Protectionb. Eye Protectionc. Hearing Protectiond. Respiratory Protectiond. Fall Protectione. Scaffoldingf. Drilling Operationsg. Housekeepingh. Hot Worki. Compressed Gas Cylindersj. Sandblasting Safetyk. Asbestos Work Safetyl. HAZWOPER Training	<p>Complete all training topics as either Yes, No or NA.</p> <ul style="list-style-type: none">m. Fire Protectionn. First Aid/CPRo. Emergency Proceduresp. Toxic Substancesq. Trenching and Excavationr. Signs, Barricades, Flaggings. Electrical Safetyt. Rigging and Crane Safetyu. Vehicle Safety (Driving)v. Job Hazard Analysis Prep.w. Confined Space Entryx. Incident Reporting
---	---

6. OSHA COMPLIANCE

6A. Has your company received any OSHA citations from a state, or federal agency within the last five (5) years? No Yes If yes, please provide copies of citations.

6B. Has your firm been cited within the last five (5) years for any environmental-related violations or other forms of Notices of Violation (NOVs)?
No Yes If yes, please describe _____

7. REFERENCES

7A. List three (3) client references that could verify the quality and management commitment of your safety program.

	Company	Address	Phone #
1	Name: _____ Contact: _____		
2	Name: _____ Contact: _____	_____ _____	_____ _____
3	Name: _____ Contact: _____	_____ _____	_____ _____

COMPLETED BY:

Print Name: _____

Date: _____ Phone #: _____

Signature _____

Title: _____

ATTACHMENT I-4: FORMER INDUSTRIAL BROWNFIELDS PROPERTY

COMMERCE PARK

PENDER COUNTY, NC

Bidder Proposal Checklist

In preparation for submitting the Proposal the Bidder has verified that the following information has been included:

- _____ **Proposal Form**
- _____ **Attachment I-1 Lump Sum/Unit Rate-Cost Proposal Breakdown**
- _____ **Construction Schedule**
- _____ **Draft "Summary Work Plan"**
- _____ **Key On-Site Personnel**
- _____ **Billing Schedule (Attachment I-2)**
- _____ **Completed Contractor Safety Evaluation Package (Attachment I-3)**
- _____ **Contractor Equipment Rate List**
- _____ **List of Proposal Qualifications/Exceptions (As Required)**
- _____ **Signature of official signing the Proposal shall be accompanied by a certified copy of the resolution of the Board of Directors, or Partnership, authorizing the individual signing to bind the corporation or partnership.**

Note:

**DECOMMISSIONING AND DEMOLITION
FORMER INDUSTRIAL BROWNFIELDS PROPERTY
COMMERCE PARK
PENDER COUNTY, NC
LUMP SUM/UNIT RATE PROPOSAL

SECTION II CONTRACT**

Pender County – Purchase Order TERMS AND CONDITIONS

In accepting this Purchase Order, from Pender County North Carolina (the "County"), your company (the "Vendor"), acknowledges and agrees to abide by the Terms and Conditions set forth below. Additional terms and conditions stated on the face of this Purchase Order shall take precedence over any conflicting terms and conditions stated below. Any terms and conditions not stated on the face of this Purchase Order but incorporated by reference therein shall be binding only if provided or signed by the County and attached hereto. In the event that a binding written contract signed by both the Vendor and the County exists, the terms and conditions of that contract shall supersede any conflicting terms and conditions below or on the face of this Purchase Order as expressly stated.

1. **COUNTY RIGHT TO CANCEL OR RESCIND** – The County reserves the right to cancel or otherwise rescind a Purchase Order based on the County's best interest.
2. **PURCHASE ORDER REQUIRED** – The County will not be responsible for any equipment, supplies, and/or services delivered without a Purchase Order and assumes no obligation for products or services shipped or delivered in excess of the quantity ordered. Any unauthorized products or services are subject to the County's rejection and shall be returned at the Vendor's expense.
3. **VENDOR FAILURE TO DELIVER** – In the event of Vendor's failure to deliver as and when specified, or to perform as and when specified, the County reserves the right to cancel this order, or any part thereof, without prejudice to its other rights, and Vendor agrees that the County may return part of any shipment so made and may charge Vendor with any loss expense sustained as a result of such failure to deliver or perform.

4. **CHANGES** – If Vendor refuses to accept this purchase order exactly as written, Vendor will return it at once with explanation. Any changes to this Purchase Order will be considered a 'Change Order' and requires the written acceptance of both parties to become effective. This will include product or service substitutions, cost changes, and delivery schedule changes.
5. **INVOICES** – Vendor will deliver invoices to the County at the address or electronically at website shown on the face of this Purchase Order. Vendor will send separate invoices for each purchase order number and invoices must be itemized in accordance with the items listed on the Purchase Order.
6. **PRICE** – The itemized price listed for products and services on the Vendor invoice must match that specified on the Purchase Order. No boxing, packing, cartage, or shipping charges will be allowed by the County unless specifically authorized on the face of this Purchase Order. Any cash discount period to County will date from County's receipt of the invoice or from the date of the receipt of goods, whichever is later.
7. **TAXES** – Vendor shall pay all sales or use taxes that are or become due in connection with any products or services provided hereunder and shall indemnify and save harmless the County from any damages, costs, fees, expenses, or penalties on account of such taxes. Vendor is required to list all applicable taxes as separate lines on the face of the invoice.
8. **RIGHT OF INSPECTION AND REJECTION** – Equipment, supplies, and services supplied by Vendor shall be received subject to the County's inspection and approval either during manufacturing or delivery (with prior arrangement), or within a reasonable time after delivery, notwithstanding prior payment. If specifications or warranties are not met, material and equipment may be returned at Vendor's expense. No material or equipment returned to Vendor as defective shall be replaced except upon the County's formal authorization.
9. **DELIVERY/TITLE** – Unless otherwise agreed, delivery shall be f.o.b. point of destination and title shall pass to County upon acceptance at the final delivery point. Risk of damages or loss following shipment and prior to acceptance by County shall be the responsibility of Vendor.
10. **ASSIGNMENT** – Neither this Purchase Order nor any interest therein nor shall any claim arising hereunder be transferred or assigned by Vendor without the

prior written consent of the County. Vendor may transfer or assign the benefits of this agreement, in whole or in part, including without limitation the County's warranty, without the approval of County.

11. WARRANTY/PERFORMANCE – Vendor warrants that the products and services furnished pursuant to this Purchase Order shall: (a) comply with all federal, state and local laws applicable thereto; (b) satisfy all requirements set forth on the face of this purchase order and any applicable documentation incorporated herein; (c) meet industry standards and be suitable for the purpose intended; (d) be of merchantable quality; and (e) be free from defects in title, labor, material or fabrication.
12. INDEMNIFICATION - INFRINGEMENT – Vendor will defend, indemnify, and save the County harmless from any and all loss, damages, costs, fees, and expenses incurred on account of any and all claims, suits, or judgments alleging that any product or service provided under this purchase order violates any patent, copyright, trade secret, trade name, or any other intellectual property right of any nature.
13. INDEMNIFICATION – DAMAGES – If any product provided hereunder is defective in any respect whatsoever, Vendor will defend, indemnify, and save County harmless from all loss, damages, costs, fees, and expenses incurred by reason of such defect, including without limitation all liability arising from any accidents, injuries, or damages to persons or property that may result in whole or in part from such product.
14. INDEMNIFICATION – CONSEQUENCES OF ACTIONS - If Vendor performs services or constructs, erects, inspects, or delivers hereunder, Vendor will indemnify and save harmless the County from all loss, damages, costs, fees, or expenses incurred in connection with any accidents, injuries, or damages to persons or property that may result in whole or in part from the performance thereof.
15. USE OF COUNTY NAME OR LOGO – Vendor agrees not to release any advertising or other materials using the County's trademark, quoting the opinion of any County employee or implying in any way that the County indorses Vendor or its products or services.
16. FEDERAL OR STATE STATUTE – Vendor represents and warrants that no federal

or state statute or regulation or municipal ordinance has been or will be violated in the manufacture, sale, or delivery of any product or service sold and delivered hereunder and if such violation has or does occur, Vendor will indemnify and save the County harmless from all loss, penalties, fees, costs, and expenses resulting in whole or in part from such violation.

17. **E-VERIFY REQUIREMENTS** – As a condition for payment under this purchase order, Vendor shall: (i) comply with N.C. Gen. Stat. Sections 64-25 et seq. (the “EVerify Requirements”); and (ii) cause each subcontractor hereunder to comply with such requirements. Vendor will indemnify and save harmless the County from all losses, damages, fees, costs, expenses, fines, and other liabilities resulting from any failure by Vendor or any subcontractor to comply with the E-Verify Requirements.
18. **INSURANCE** – Vendor shall secure, before delivery of any goods or services hereunder, Commercial General Liability insurance in an amount not less than \$1,000,000 bodily injury each occurrence/aggregate and \$1,000,000 property damage each occurrence/aggregate, or \$1,000,000 bodily injury and property damage combined single limits each occurrence/ aggregate, with the County as additional insured. Vendor shall produce an insurance certificate evidencing such coverage upon request by the County.
19. **STRICT COMPLIANCE** – The County may at any time insist upon strict compliance with these terms and conditions notwithstanding any previous custom, practice, or course of dealing.
20. **MATERIAL SAFETY DATA SHEETS** – Current Material Safety Data Sheets, when applicable to the order, shall be provided by Vendor in accordance with all regulations.
21. **VENUE FOR LEGAL ACTIONS** – This purchase order is governed by North Carolina law without regard to its conflicts of law principles. Any legal actions arising from this purchase order shall be brought in Pender County, North Carolina.

**DECOMMISSIONING AND DEMOLITION
FORMER INDUSTRIAL BROWNFIELDS PROPERTY
COMMERCE PARK
PENDER COUNTY, NC
LUMP SUM/UNIT RATE PROPOSAL**

SECTION III SPECIFICATION NO. 01 – SCOPE OF WORK

PART 1 - GENERAL

- 1.1 The Contractor shall provide all procurement, and construction services including all manpower, materials, facilities, equipment, tools, services, and incidentals required to complete the decommissioning and demolition as described in this Scope of Work.

The Scope of Work for Decommissioning and Demolition at the site for the Identified and illustrated structures located at the Former Industrial Brownfields Property located at 101 Vitamin Drive in Pender County, North Carolina generally includes:

- Demolition approach and sequence
- Preparation of Basic Work Plans/Sequence
- Mobilization
- Temporary Site Facilities and Controls
- Site Housekeeping
- Site Fencing and Signage
- Erosion and Sedimentation Controls
- Asbestos Containing Materials Removal, Transportation and Disposal
- Environmental Waste Removal, Transportation and Disposal (e.g. petroleum containing soils, waster from wastewater systems)
- Universal Waste (e.g. fluorescent light ballast, potentially mercury-containing emergency lighting switches) Removal, Transportation and Disposal
- Vertical/Horizontal Demolition of all structures from the site
- Removal of all paved roads, parking lots and side walks
- Removal of all materials from boneyards on the site
- Subsurface structures and utility removal
- Recycling and Reuse of Recyclable Materials
- Segregation, Staging and Loading of All Waste Materials
- Transportation and disposal of Waste Materials
- Site Restoration including backfilling of two ponds
- Demobilization

- 1.2 Schedule

The Construction Progress Schedule shall be prepared utilizing Critical Path Method in the form

of a horizontal bar chart with activity dependencies shown. The Schedule is to be used as the Contractor's baseline/target schedule. The complete sequence shall be shown of construction by activity by identifying work of separate stages and other logically grouped activities.

The Construction Progress Schedule shall be revised as required to indicate anticipated and actual durations and sequence of activities. Copies of revised schedules shall be provided for review and comment. Any inability to comply shall be reported and detailed explanation shall be provided with suggested remedies.

Schedule is a very important consideration in the award of this contract. Pender County goal is to have the decommissioning and demolition scope of work in this demolition plan completed by April 1, 2022.

PART 2 - PRODUCTS

2.1 Drawings

Project drawings are attached to this document. Any drawings transmitted with and made part of this Request for Proposal are as listed on the Drawing Index of this Specification. The drawings are for information only and location of any utilities or existing site features shall be field verified. The drawings include the following:

- Figure 1 - Site Location Map
- Figure 2 – Site Map
- Figures 3- a, b, c and d – Survey Maps of Underground Utilities to be Removed

PART 3 - EXECUTION

3.1 Federal, State, and Local Requirements

The Contractor shall be responsible for executing the Work in compliance with the requirements of this document and with relevant standards, regulations, and specifications including but not limited to:

- Preparation of a basic Demolition Work Plan (including asbestos) ; Site-specific Health and Safety Plan; and Traffic Control Plan
- Applicable state and local permits obtained by Contractor, (Erosion/Sedimentation Control Plan has been prepared)
- Applicable federal regulations
- Occupational Safety and Health Administration (OSHA), National Institute for Occupational Safety and Health (NIOSH), National Fire Protection Association (NFPA), and Environmental Protection Agency (EPA) standards
- State of North Carolina requirements
- Other local government authority requirements

- Industry standard practices
- Manufacturer's requirements or recommendations

Where a compliance requirement conflicts with another, then the more stringent requirement shall take precedence. Noncompliant work shall be repaired or replaced to the Owner's satisfaction at no cost to the Owner.

PART 4 - GENERAL SPECIFICATIONS

4.1 Specifications transmitted with and made part of this Request for Proposal are as listed on the Specification Index.

PART 5 - INTENT

- 5.1 The intent of this Specification is to provide the Contractor with sufficient and adequate definition of the Scope of Work to enable the Bidder to submit its proposal; including approach to be taken to remove the structure(s) while addressing surrounding obstacles, cost(s) to furnish all labor and supervision and to provide all materials, except those specified as being furnished by Pender County, all construction tools, equipment, and services as required and reasonably incidental to the proper completion of all Work as called for on the Drawings and/or Bills of Material, and Specifications transmitted with and made part of this Request for Proposal.
- 5.2 Work called for or implied on one document but omitted on others shall not be considered a valid basis for claim of omission by Contractor in bidding or in performing work. Any such conflict is the responsibility of Contractor alone to call to the attention of Wood for resolution.

PART 6 - WORK NOT INCLUDED

- 6.1 The following Sections of Specification 01100 are not included in the work required to be done in this RFP.
- 6.1.1. Summary Items 6 and 7
 - 6.1.2. Shop Drawings
 - 6.1.3. Record Drawings
 - 6.1.4. Pre-Bid meeting - part of RFP
 - 6.1.5. Meeting Agenda
 - 6.1.6. Meeting Attendees requirements shall be limited to Contractor, Contractor and Pender County/AP CM
 - 6.1.7. Quality Assurance/Quality Control Plan
 - 6.1.8. Quality Preparation
 - 6.1.9. Quality Installation

- 6.1.10. Quality Inspection, Materials and Environmental Testing and Sampling
- 6.1.11. Problem or Work Deficiency Meeting
- 6.1.12. Surveying
- 6.1.13. Survey Control Points

PART 7 - WORK SUMMARY

7.1 Description of Structure Decommissioning and Demolition (D&D):

The following summary outlines the D&D of site components and structures. A Photo Journal of Structures and Drawing for Demolition is presented in **Appendix A:**

Area ID	Descriptions
1	Former wastewater treatment infrastructure (WWTI) – round concrete setting basin with steel catwalk and misc. equipment
2	WWTI – Two approximately 4-foot diameter concrete sumps
3	WWTI – Two Lined wastewater treatment ponds
4	WWTI – Three rotating biological contactors
5	WWTI - Rectangular concrete oxidation treatment tank
6	WWTI - Round concrete containment/vessel
7	WWTI – Misc. debris staged south of Area 5 & 6
8	Rectangular concrete containment with fiberglass railing
9	WWTI – Approximately 8' diameter concrete sump located between the wastewater treatment ponds
10	Corrugated metal building
11	Electrical transformer
12	Concrete containment and tank farm with 3 steel insulated tanks
13	Corrugated metal building
14	Brown fiberglass Raven tank
15	Sealed fiberglass tank and operator shed
16	Corrugated metal building
17	Fiberglass shed
18	Corrugated metal building
19	Former fire water tank and attached pump building
20	Streetlights typical
21	Administration building warehouse
22	Main administration building
23	Auxiliary administration building
24	Truck scale
25	Contractor parking area power pole typical
26	Turnstile
27	Guard shack

28	All paved roads and parking lots and associated curbing and sidewalks
29	All designated underground utilities shown on Drawings 3a, 3b, 3c

D&D shall consist of removal of all designated environmental and universal wastes, equipment/contents, structures, concrete, foundations, maintenance pads and pedestals. Foundations shall be removed including below grade features, and any sumps. Excavations shall be backfilled to existing surrounding grade. Contractor shall remove all underground utilities as specified on Drawings 3 (a, b, and c). Remove pavement within the specified areas. Larger pieces of concrete, asphalt or other building materials have to be removed from the site,

7.2 Pre-Demolition Work

KICKOFF MEETING

The Pender County Construction Representative (*Construction Manager*) will schedule a pre-construction kickoff meeting at the site or other convenient location before Work starts. The meeting will provide an overview of the following project requirements: Project Scope, Schedule, Invoicing Procedure, CCO Procedure, Contractor Submittals, Working in Operating Facilities, Site Access and Security, Health and Safety, Temporary Facilities, Coordination of Work, Permit Requirements, Materials Management, QA/QC, Managing Waste.

MOBILIZATION & SITE PREPARATION

MOBILIZATION

- 7.2.1 Provide and setup field office(s), office supplies, sanitary facilities, change trailers, First Aid and PPE supplies, temporary power, small tools and equipment.
- 7.2.2 Coordinate with Pender County Construction Manager (Wood) the following mobilization activities:
 - A. Location of field offices, sanitary facilities, lay-down areas and temporary storage facilities.
 - B. The agreed to location for construction field offices, storage, site access, parking and employee entry to Facility shall be as identified in the Construction Documents and will be reaffirmed at the kickoff meeting.

7.3 Scope of Work

7.3.1 General

- A. The Scope of Work consists of removal and abatement of regulated materials as practical to minimize comingled demolition debris, demolition of the facility and recycling of materials. The Contractor's approach to the abatement, segregation and

demolition of the buildings is performance based to reduce the volumes of asbestos containing material (ACM) versus Construction and Demolition waste, thereby reducing overall T&D costs, while addressing adjacent issues identified below. Currently there is only one identified asbestos containing feature, which is the roof of a small pump house discussed further in these bid package (see Appendix B).

- B. These plans and specifications describe the technical requirements for removal of asbestos containing materials, universal and environmental wastes and demolition work. Demolition work includes the removal of asbestos-containing materials, universal wastes (e.g. fluorescent light ballast, potentially mercury-containing emergency lighting switches) environmental waste and offsite disposal of demolition debris, demolition and offsite recycling/disposal of building, and partial site restoration at this facility. The environmental wastes and asbestos containing materials are discussed in detail in this bid package.
 - C. Universal Waste: Waste streams present, includes fluorescent light bulbs, fluorescent light ballasts, circuit boards, thermostats, mercury vapor light fixtures, fire extinguishers, lead-acid batteries, mercury switches, refrigerants, polychlorinated biphenyls (PCBs), shall be removed, containerized, and transported to proper offsite disposal facilities by the Contractor. For planning purposes, the Contractor shall provide Pender County with quantity estimates of these materials the Contractor expects to generate if other than noted in the pre-demolition assessment report (**See Appendix B - Regulated Building Materials Evaluation Report Former Industrial Brownfields Property**). Approval by Pender Engineering Consultant Wood of disposal sites(s) for waste streams must be obtained prior to shipment of universal or environmental wastes from the project site.
 - D. The Contractor shall be responsible for segregation, staging and loading of asbestos containing materials, universal waste, designated waters and sediments and petroleum waste. Disposal of asbestos containing materials, universal waste and environmental non-hazardous demolition debris shall only be at an appropriately licensed waste facility location.
- 7.4 Removal of Asbestos Containing Materials (Refer to **Section 01070 - Collection, Removal and Offsite Disposal of Asbestos**)
- 7.5 Demolition (Refer to Section 02 - Demolition)
- 7.5.1 General
- A. Prior to start of demolition activities for a specific building that requires removal of asbestos containing materials, the Contractor shall issue to Wood written certification that all collection, removal and offsite disposal of asbestos work under this Agreement and is complete and performed in accordance with the specifications.

- B. The Contractor shall remove, containerize, and stage all waste streams listed in 7.3.1.C prior to demolition of structures containing these materials as practical. Due to the condition of the building(s), for planning purposes, the Contractor shall identify the methods used for collection and segregation, as indicated in their Demolition Work Plan.

7.5.2 Job Conditions

- A. The Contractor is advised that the facilities contain hazards, for instance lead paint on outdoor light poles as identified in **Appendix B: Regulated Building Materials Evaluation Report Former Industrial Brownfields Property**. In addition, the Contractor may encounter liquid and solid residues within portions of structures, sumps and underground utilities that were either inaccessible during building decommissioning or were not addressed under that scope of work. The Contractor shall serve as an independent Contractor with the responsibility for communicating hazards to appropriate employees and other representatives and taking appropriate safeguards to protect such persons. The Contractor shall establish and maintain a full-time Site Health and Safety Officer, whose only responsibility onsite shall be to ensure the safety and health of Contractor and Contractor personnel for the duration of the project.
- B. The Contractor is advised that lead-based painted surfaces may be encountered during implementation of the Work. The Contractor shall be responsible for taking all necessary precautions and comply with all applicable laws and regulations to protect the health and safety of the workers and the environment. Such lead paint do not require remediation or special waste handling, but contractor is herein informed lead paints exist with certain areas of the facility as outlined in **Appendix B**.
- C. The Contractor assumes the risk of any loss to Contractor due to theft, destruction, disappearance of, or damage to the structures or portions thereof, to be demolished, whether occurring before or after the submission of the Bid or execution of the Contract Agreement, arising from any cause what so ever excepting only affirmative, willful acts of Pender County.
- D. Pender County assumes no responsibility for security of the facility either before or after the Contractor is given access there to and does not guarantee that the facility's condition will remain the same after the submission of the Bid as before.
- E. Items of salvage value such as scrap metal shall be disassembled. Contractor shall promptly remove from the site for transportation to a scrap processing or reuse/resale facility all metals intended for salvage or reuse.

- F. Contractor is responsible for dusts and other airborne debris generated as a result of demolition activities and shall be required to have a Dust/Debris Management Plan that articulates Contractor understanding of this issue. Contractor shall wet down the adjacent site and areas as required to prevent dust from rising. The Contractor shall provide water trucks or water lines, and hoses for the purpose of dust management. Surface runoff resulting from dust management operations shall be contained and managed by Contractor.
- G. The Contractor shall not use or permit the use of the structures to be demolished for any purpose other than for actual demolition without the written permission of Pender County.
- H. The Contractor may encounter liquids and solid chemical residuals in buildings, building components, vessels, tanks, pipelines and, as such, shall be prepared to identify, contain, cleanup, and/or dispose of such materials in accordance with all applicable spill response criteria. The contractor will notify Wood's onsite manager of any discovered waste materials for assistance in proper identification and characterization of such waste materials.
- I. The Contractor shall verify that all utilities in the work area have been disconnected prior to the start of Work. Written certifications by properly qualified personnel shall be issued to Wood prior to start of Work. The utilities shall be disconnected in accordance with the specifications outlined in Section 02075 – Utility Termination.
- J. Contractor is responsible for securing materials and equipment scheduled for disposal from theft. As stated before, no equipment left in the facility is to be reused for its intended manufactured purpose, unless the Contractor secures a release of ownership from Pender County, indemnifying Pender County against any and all deficiencies in equipment performance.

7.5.3 Materials

Contractor shall submit manufacturer information; safety data sheets (SDS), and other appropriate information about chemicals proposed for use, to Wood for acceptance, prior to use onsite. Contractor shall take all precautions to safeguard files, documents, chemicals and materials stored onsite from vandalism and theft.

7.5.4 Submittals

Completed copies of all disposal paperwork shall be maintained by the Contractor in an onsite project file. The Contractor shall furnish completed copies of all waste disposal paperwork to Wood's field representative within five (5) working days of the date of disposal. Any paper copies of disposal paperwork (manifest) shall be

delivered to Wood within 45 days of date of disposal.

7.5.5 Execution

- A. The Work shall be performed by the Contractor on all buildings, equipment, materials, and structures at the facility as described in these Contract Documents, and as specified.
- B. All specified structures and associated appurtenances shall be demolished as described in Section 7.1. All piping and conduits shall be removed, and water, sewer, electrical, fiber optic, sanitary, and natural gas lines designated on the attached Drawings shall be removed. All demolition rubble, debris, machinery and equipment, piping, electrical, instrumentation, metal, wood, glass, paper, plastic, fabric, rubber, wood and each and every item of debris shall be removed by Contractor from the facility and reused or recycled or disposed of offsite.
- C. Permanent storage onsite of any material, rubbish, dirt, debris, or waste of any sort resulting from the demolition operations by the Contractor is prohibited.
- D. During the progress of the Work, all trenches, holes, openings, or voids shall be filled, covered, enclosed by fencing, or otherwise protected by the Contractor in such a manner that conforms to all applicable Federal, State, and local safety rules and regulations.

7.5.6 Temporary Fencing

- A. The majority of the project is enclosed by a chain link fencing. Contractor shall install and maintain temporary fencing or other temporary barriers, if necessary in addition to the existing property fence, to minimize unauthorized or unknowing access to demolition areas.
- B. In areas that require temporary fencing, temporary fencing or barrier shall be construction type fencing, constructed of steel chain link fence, removable or portable (or equivalent), and a minimum 6 feet in height. If portable, sections must be connected to mitigate intrusion. Fence shall be durable and resistant to normal and gusty wind events.

7.5.8 Work within Public Roadways and Onsite Roadways

- A. The use and protection of all public roadways involved in this Contract shall be in accordance with all applicable state, county, and local requirements.
- B. The Contractor shall prepare and submit a Traffic Control Plan prior to commencement of work.

- C. All transportation of equipment and materials along public roadways shall be preceded by the application and issuance of all necessary road and bridge crossing permits from the appropriate city, county, and state transportation authorities. The Contractor shall be responsible for all permits and associated fees.
- D. Any damages to existing roadways or bridges shall be repaired (to its original or better condition) by the Contractor, at no expense to Pender County. In the event that part of the roadway requires barriers for pedestrian or vehicular safety, as identified in the Traffic Control Plan, the roadways shall be repaired to prior condition as the barriers are removed at the conclusion of demolition activities.
- E. The Contractor shall maintain the public roadways free of debris accumulations. The Contractor shall inspect and remove all debris from the roadway resulting from the Work on a daily basis to mitigate any vehicle or pedestrian obstructions.

7.5.9 Protection of Existing Utilities

- A. Contractor shall be responsible for coordinating with Pender County representatives to ensure that existing utilities, not designated to be terminated nor abandoned, are protected during the performance of the work. Utilities that are to be demolished will be designated on surveyed drawings that are included in this report.
- B. Any damage to utilities not designated for removal shall be repaired at the Contractor's expense.

7.5.10 Field Quality Control

- A. All Work conducted pursuant to this Contract shall be conducted by persons qualified to produce workmanship of specified quality.
- B. Workers designated to operate equipment shall have received training and have experience in the operation of such equipment.
- C. Preventive Maintenance and Calibration
 - 1. The Contractor shall establish a preventive maintenance program for equipment and systems that would otherwise be subject to breakdown when the breakdown could lead to safety hazards, waste release, work delays, or other adverse impact upon the performance of the Work, or loss of completeness and accuracy in data. The preventive maintenance schedule will be developed based on the appropriate manufacturer's recommendations.

D. Inspections

1. Wood will be onsite during the duration of the Work to oversee activities outlined in these Contract Documents. Oversight by Wood shall not relieve the Contractor of any responsibility for the accuracy or completeness of his/her work.
2. The Contractor shall verify that Site activities are being performed efficiently in conformance with approved plans, standards, federal and state regulatory requirements, sound scientific and construction practices, and the Contract requirements.

E. Corrective Action

The need for corrective action may be identified by system or performance audits or by standard quality assurance procedures. In addition, all technical staff shall be responsible for reporting questionable technical or quality control nonconformance to the appropriate Site manager. When the Contractor identifies a nonconformance or deficiency, the Contractor shall promptly notify Wood. Wood shall review the deficiency and consult with the contractor regarding appropriate corrective action. The Contractor shall undertake corrective procedures at no cost to Pender County.

7.6 Site Restoration

7.6.1 General

All types of surfaces, roadways, parking lots, sidewalks, curbs, gutters, culverts, fencing, and vegetation disturbed, damaged, or destroyed during the performance of the work under or as a result of the operations performed under this Contract, shall be left in an orderly state. The performance of work used in the restoration shall produce a surface or feature equal to or of equivalent value of the condition of each before the work began and as approved by Wood. This means that the area can be left as barren soils.

7.6.2 Restoration and Cleanup

- A. Concrete slabs and foundations and subsurface features such as sumps are to be removed and the area leveled out to surrounding grade.
- B. Waste, surplus materials, rubbish, and temporary construction facilities shall be removed from the Site.

PART 8 - BID ITEMS INCLUDED

The following listed items are general descriptions of work to be performed under this contract and are not to be misconstrued by Contractor as being a complete description of all work. The Contractor is responsible for reading all portions of this Bid Specification including the General Requirements, Specifications, Attachments and Drawings. Contractor will be responsible to include all costs for incidental items required to complete construction tasks, although not specifically referenced in the general description of the work item. The work items described below and presented in the Bid Form shall constitute all items to be specifically paid under this Contract.

Summary of Items included in Bid

Measurement. This Work will be measured on a Lump Sum Basis, unless noted in the descriptions.

Payment. Payment will be made on approval and acceptance by the Owner's Site representative for the total value listed on the Schedule of Values.

BID ITEM 8.1- General Requirements

- 8.1.1 Work for this Item includes providing project management, construction support, and full time Site Superintendent, and support supervision and construction management for the duration of the project. This item also includes maintenance of temporary facilities and site controls (signage, temporary office space/ utilities, site safety, etc. of the work).
- 8.1.2 Payment for General Requirements will be made in accordance with the contract and Specification 01.

BID ITEM 8.2 - Mobilization, Site Setup, Work Plans, Submittals and Permits

- 8.2.1 Mobilizing all necessary equipment, supplies, materials, and personnel to the site. Determine needs for mobilization and set up for all of the equipment as necessary for the general plan including construction equipment, shops, storage areas, offices, construction and clean-up equipment, all utilities, power, and other facilities and temporary services including traffic barriers, fencing and security. This bid item includes providing the required labor, materials and equipment for protection of structures to remain. Obtain all necessary permits required by Federal, State, or local law.
 - Apply for, pay fees for and obtain all permits for the work.
 - Control storm water, as necessary, during demolition and restoration and cleaning

of site including installation/maintenance of Soil Erosion and Sedimentation Controls as required by local codes and described in the approved attached Soil Erosion and Sedimentation Control Plan.

8.2.2 Preparation and submission of the following work plans and submittals, prior to hazardous materials removal or structure demolition:

- Demolition Health and Safety Plan. Contractor's plan shall conform to the site-specific HASP and other applicable safety standards governing the work. The Plan shall cover all Contractor and sub employees performing work on the site. Contractor's plan shall summarize all employee training and personnel protection, and air monitoring to be performed for safe and legal demolition loading.
- Preparation, development, and submission of a Work Plan for removal of all the one roof structure identified in **Appendix B: Regulated Building Materials Evaluation Former Industrial Brownfields Property**.
- Demolition Work Plan, indicating the means and methods to be used for execution of the hazardous materials staging, segregation and removal, and structure demolition work, including methods for waste and debris handling, material recycling, and dust control.
- Transportation and Disposal Plan including means and methods for containment and loading of hazardous materials, truck staging, truck traffic and transportation, handling and disposal of demolition debris.
- Environmental Control Plan (dust control, storm water control, equipment decontamination, etc.).
- Certification of Regulated Material Removal. Certify that regulated materials discovered have been removed and properly disposed of prior to structure demolition.
- Proposes sources and certifications, virgin source documentation for materials proposed for job site laydown, filling of pits and contractor disturbed areas requiring restoration.

8.2.3 Contractor must obtain all other permits/approvals that may be required under state and local jurisdictions. These permits/approvals include, without limitation, those related to building deconstruction, work within public roadways, asbestos notifications, hoisting licenses, and zoning regulations. Prior to submittal to the appropriate agency, all permit applications must be presented to Owner for review and approval ten (10) days before submitted to allow time for review as Technical Submittals. Contractor shall not submit any Project-related permit application without prior Owner approval.

8.2.4 Payment for Mobilization, Site Setup, Work Plans Submittals and Permits will be measured as a single item, completed and Wood has approved all work plan submittals and received copies of permits in accordance with the Contract and Specification 01.

BID ITEM 8.3 – Implementation of Site Erosion and Sedimentation Plan and Site Wide Woody Vegetation Grubbing/Chipping and Rough-Cut Mowing

- 8.3.1 Work for this item includes implementation of the Site Erosion and Sedimentation Plan and removal of woody vegetation and ground cover as necessary to access work areas. Trees, shrubs and vegetation shall be removed for the entire project site area.
- 8.3.2 Performance of all implementation of the erosion control plan, vegetation grubbing, chipping and mowing shall be measured as a single item, complete after Pender County approval.
- 8.3.3 Payment for the implementation of the erosion control plan, vegetation, grubbing, chipping and mowing work will be made in accordance with the contract and Specification 01.

BID ITEM 8.4 – Utility Disconnects Terminations Verification

- 8.4.1 Work includes the verification that all power has been terminated to the site by Duke Energy. Arrangements have been made in advance for Duke Energy to terminate power to the site and remove their power infrastructure.
- 8.4.2 This task will be measured as a single item.
- 8.4.3 Payment for utility disconnects and terminations verification will be made in accordance with Specification 01.

BID ITEM 8.5 – Environmental Waste Removal, Transportation and Disposal

- 8.5.1 Work includes the removal and disposal of all designated wastewater liquids and solids and petroleum waste removal and disposal and petroleum containing wastes from the facilities. These wastes including lab testing results and volumes are identified and discussed in **Appendix B: Regulated Building Materials Evaluation Former Industrial Brownfields Property**. Work for this item also includes removal, transportation, and disposal of all the identified waste from selected secondary containment sumps, old wastewater infrastructure and from buildings to be demolished. This item includes removal of petroleum-containing soils and used oil in containers from the areas designated in **Appendix B**. The Report identified above included in the bid package are for reference only. All disposal facilities shall be approved by Pender County.
- 8.5.2 Environmental Waste, Wastewater liquids and solids and Petroleum Waste Removal

and Disposal will be measured as a single item, but quantities of disposal for each specific waste must be provided by the contractor (e.g. waste manifest with quantities).

- 8.5.3 Payment for Environmental Waste will be made in accordance with the Specification 01.

BID ITEM 8.6 – Universal Waste Removal, Transportation and Disposal

- 8.6.1 Work for this item includes the disposal of Universal Waste: Waste streams present, includes fluorescent light bulbs, fluorescent light ballasts, circuit boards, thermostats, mercury vapor light fixtures, fire extinguishers, lead-acid batteries, mercury switches, refrigerants, polychlorinated biphenyls (PCBs), shall be removed, containerized, and transported to proper offsite disposal facilities by the Contractor. For planning purposes, the Contractor shall provide Pender County with quantity estimates of these materials the Contractor expects to generate if other than noted in the pre-demolition assessment report. Approval by Pender Engineering Consultant Wood of disposal sites for waste streams must be obtained prior to shipment of any waste from the project site.

- 8.6.2 Universal Waste will be measured as a single item.

- 8.6.3 Payment for Universal Waste removal, transportation and disposal will be made in accordance with the contract and Specification 01.

BID ITEM 8.7 – Demolition, Transportation and Disposal/Recycling:

Buildings with Limited Regulated Asbestos Containing Material, Light Poles, Foundations, Asphalt Paving and Concrete Curbing and Paving. Truck Scale and Chain-link Fence/Gates and Turnstile

- 8.7.1 Work for this item includes the complete decommissioning and demolition of buildings, foundations, paving and concrete including below grade structures as illustrated in **Appendix A** and shown on the underground utility drawings. Underground structures associated with the buildings and secondary containment systems are to be demolished and removed from the site.

- 8.7.2 Decommissioning and demolition of buildings, light poles, foundations, asphalt paving and concrete curbing and paving, debris segregation and staging, and loading will be measured as a single item.

- 8.7.3 Payment for structure demolition and debris disposal will be made in accordance with the contract and Specification 01.

BID ITEM 8.8 – Above Ground Storage Tanks (ASTs) and Ancillaries

Decommissioning and Demolition Loading, Transportation and Disposal

- 8.8.1 Work for this item includes the complete decommissioning/demolition of the former tanks and concrete pads, secondary containment structures and foundations including below grade structures associated with tanks. All secondary containment systems whether currently around a tanks system or not are to be demolished and removed. Tanks need to be checked for residuals/leak and cleaned if necessary prior to demolition. If rinsewater or decontamination water is generated it shall be containerized and disposed of. Also any liquids and sludge-like materials contained within the secondary containment systems will be containerized for off-site disposal. Wood will utilize previous environmental testing results to consult with the Contractor to determine how liquids and solids should be disposed. Wood will conduct additional lab testing for characterization of the waste as needed.

Segregation of clean recyclable materials, and the transportation and disposal of demolition debris shall be in accordance with all rules, regulations, and codes. All trash, rubbish, equipment, etc. shall be disposed offsite. Include all supplies including first aid and PPE. All disposal facilities shall be Pender County approved.

- 8.8.2 Decommissioning and demolition of tanks, debris segregation and staging, and loading will be measured as a single item.
- 8.8.3 Payment for Decommissioning and demolition of tanks, debris segregation and staging, and loading will be made in accordance with the contract and Specification 01.

BID ITEM 8.9 - Above Ground Concrete Structures, Foundations Demolition, Debris Loading, Transportation and Disposal

- 8.9.1 Work for this item includes the complete decommissioning/demolition and recycling as appropriate of the former wastewater infrastructure including concrete structures, wet wells, sumps, connective piping systems, associated equipment, pipe racks and trestles including associated support structures. The removal of water and sediments/residues from the waste water systems will be in accordance with the report provided in **Appendix B**. This includes below grade piping and structures (subsurface demolition) as shown on drawings and **Appendix A and the underground utility maps in the drawings**. Piping being removed will need to be checked for residuals and cleaned if necessary prior to demolition. **All residual liquids and solids removed from piping and sump systems as well as all wash water will be containerized.** Wood will use previous environmental testing results and additional testing as necessary to consult with the Contractor to determine how the liquids and solids should be disposed. Segregation of recyclable materials, and the transportation and disposal of demolition debris will be in accordance with

all rules, regulations, and codes. Segregation of recyclable materials and transportation and disposal of demolition debris in accordance with all rules, regulations, and codes. All trash, rubbish, equipment, etc. shall be disposed offsite. Include all supplies including first aid and PPE. All disposal facilities shall be Pender County approved.

- 8.9.2 Payment for decommissioning and demolition of the former wastewater treatment infrastructure including concrete structures, secondary containment structures and foundations transportation and disposal will be made in accordance with the Contract and Specification 01.

BID ITEM 8.10- Subgrade Utilities and Infrastructure Removal, Transportation and Disposal as Illustrated on Subsurface Utility Drawings.

- 8.10.1 Work for this item includes the removal of the underground utilities shown on the attached drawings. These utilities have been located and sized as shown on the attached drawings. The utilities include but are not limited to the stormwater system (stormwater drop inlets, collection boxes and associated underground piping), fire water lines, industrial process sewer lines, water lines, sanitary waste lines, electrical banks (concrete and metal conduits). Subsurface structures associated with the utilities such as wet wells and collection boxes will be removed as well. Segregation of recyclable materials and transportation and disposal of demolition debris in accordance with all rules, regulations and codes. All trash, rubbish, equipment, etc. shall be disposed of offsite.

If utility trenches or other excavations extend to or **beyond a depth of 5 feet** below construction grade, the **Contractor shall be required to develop a trench safety plan to protect personnel entering the trench or trench vicinity**. The collection of specific geotechnical data and the development of such a plan, which could include designs for sloping and benching or various types of temporary shoring, is beyond the scope of this specification. Any such designs and safety plans shall be developed in accordance with current OSHA guidelines and other applicable industry standards.

To assist in preparing an excavation safety plan, we have classified the soils encountered at this site based on the data collected during previous studies. The project site is underlain by shallow Coastal Plain deposits and with depth, by Marine deposits common to the Pee Dee Formation. The upper-most soils (where excavations are likely to occur), are anticipated to consist of non-cohesive, granular soils and may be classified as Type "C" soils under current OSHA regulations pertaining to excavations (see CFR 1926, Subpart P). This classification is based on the observed non-cohesive nature of the soil. In excavations penetrating these soils, the sloping and benching schemes specified for Type "C" soils under the OSHA regulations require that the excavation sidewalls be sloped no steeper than 2:1 (horizontal:vertical). For additional details, please refer to CVR 1926, Subpart P, Appendix B.

- 8.10.2 Piping being removed will need to be checked for residuals and cleaned if necessary prior to demolition. All residual liquids and solids removed from piping and sump systems as well as all wash water will be containerized. If soils are impacted by liquids from underground utilities then these soils will need to be placed in a roll off box until Wood can conduct additional testing as necessary to consult with the Contractor to determine how the solids should be disposed. The waste will then be removed off site by the contractor and properly disposed of.
- 8.10.3 Subgrade utilities and infrastructure removal, transportation and disposal will be measured as a single item.
- 8.10.4 Payment for subgrade utilities and infrastructure removal, transportation and disposal will be made in accordance with the contract and Specification 01.

BID ITEM 8.11 –Removal of Surface Water from One Raw Water Pond, Removal of Plastic Liner and Associated Pond Infrastructure, Backfilling and Compaction of the Two Ponds, Site Restoration,

- 8.11.1 Work for this item includes the drainage of a raw water pond, backfilling of two raw water/fire water ponds and removal of plastic liner materials and all associated pond infrastructure including subgrade piping. This work also includes pumping the water from the raw water pond to the land surface nearby for infiltration into the soil.

Following drainage of the pond and removal of the liners both ponds will be backfill and soil will be compacted. Fill materials for backfilling the ponds and other excavations will be provided on the site. Prior to placing any fill, the following guidelines should be followed. Existing vegetation, stock piles, debris piles, gravel, coal, rock fragments, pavements, and structures planned for demolition should be stripped and removed from the site. Obstructions that extend below finish grade, if any, should be removed and the resulting holes filled with structural fill that is placed and compacted as recommended herein. Root balls from tree removal operations should be removed and the resulting voids be filled with structural fill that is placed and compacted as recommended herein. Existing below-grade utilities, such as underground storm water pipes, should also be removed or re-routed as required by the drawings. Voids left from removing underground utilities or storm water structures should be filled with fill that is placed and compacted as recommended herein. After stripping, clearing, grubbing, and root raking is performed and prior to placement of any fill soils, the exposed subgrade should be evaluated by proof rolling. Any soft or weak areas, or areas which deflect, rut or pump excessively during proof rolling should be removed and replaced with structural fill that is placed and compacted as recommended herein. Proof rolling should be accomplished with a pneumatic-tired roller, a loaded dump truck, or similar equipment weighing approximately 20 tons and observed by an

experienced engineering technician working under the supervision of the Geotechnical Engineer-of-Record. Proofrolling should be performed after a suitable period of dry weather to avoid degrading an otherwise acceptable subgrade. The proofroller should make at least four passes over each location, with the last two passes perpendicular to the first two.

If utility trenches or other excavations extend to or beyond a depth of 5 feet below construction grade, the **Contractor shall be required to develop a trench safety plan to protect personnel entering the trench or trench vicinity**. The collection of specific geotechnical data and the development of such a plan, which could include designs for sloping and benching or various types of temporary shoring, is beyond the scope of this specification. Any such designs and safety plans shall be developed in accordance with current OSHA guidelines and other applicable industry standards.

To assist in preparing an excavation safety plan, we have classified the soils encountered at this site based on the data collected during previous studies. The project site is underlain by shallow Coastal Plain deposits and with depth, by Marine deposits common to the Pee Dee Formation. The upper-most soils (where excavations are likely to occur), are anticipated to consist of non-cohesive, granular soils and may be classified as Type "C" soils under current OSHA regulations pertaining to excavations (see CFR 1926, Subpart P). This classification is based on the observed non-cohesive nature of the soil. In excavations penetrating these soils, the sloping and benching schemes specified for Type "C" soils under the OSHA regulations require that the excavation sidewalls be sloped no steeper than 2:1 (horizontal:vertical). For additional details, please refer to CVR 1926, Subpart P, Appendix B.

- 8.11.2 Site restoration, backfilling and compaction of two ponds and below grade utility excavation will be measured as a single item.
- 8.11.3 Payment for site restoration, backfilling and compaction of two ponds and below grade utility excavation will be made in accordance with the Contract and Specification 01.

BID ITEM 8.12 – Demobilization, Project Closeout Submittal and Contract Closeout

- 8.12.1 Work for this item includes removal of all temporary support systems and equipment, clearing of site and removal of residual materials resulting from demolition activities, and submittal of documentation including copies of disposal documentation and permit closeout. In addition, any specific action items that are required per the issued Erosion and Sedimentation Control Plan shall be addressed under this bid item.
- 8.12.2 Demobilization, Project Closeout Submittal and Contract Closeout will be measured

as a single item.

- 8.12.3 Payment for demobilization, project closeout submittal and contract closeout will be made in accordance with the Contract and Specification 01.

BID ITEM 8.13 – Performance Payment and Bond

- 8.13.1 Performance payment and Bonds for 100% of the Contract Value shall be provided at the lump sum amount provided on the bid form at Pender County's sole discretion.

BID ITEM 8.14 – Recyclable Material Credit

- 8.14.1 Work for this item will comprise a credit to be issued to Pender County for a Contractor determined percentage of the value of recycled materials.
- 8.14.2 Recyclable Material Credit will be measured as a single item.
- 8.14.3 Payment will be as a credit on the bid form that will reduce the total contract value.

Unit pricing following the section and table below is to provided with the bid.

Unit Price Items: the following unit price classification items may or may not have been specified a to quantity and technical requirements in the contract documents. These unit price items may be used in establishing additional costs due the contractor for site work to be done in addition to the scope of the work described in the contract documents and bid as part of the General Contractor's scope of work. These items will be at the discretion of the Owner and will be paid on actual quantities measured by the Owner or Owner's Representative.

These unit prices are to be submitted by the Contractor with the Bid.

Item	Description	Unit	Unit Price
1	Clearing and Grubbing	AC	\$
2	Topsoil Stripping, stockpile, redistribution	CY	\$
3	Silt Fence (Installed complete & in place)	LF	\$
4	#57 Stone	Ton	\$
5	Class "B" Rip-Rap	Ton	\$
6	On Site Suitable Material Excavation/Placement	CY	\$
7	Unsuitable Soil Removal/Disposal	CY	\$
8	Off-Site Topsoil Borrow	CY	\$
9	Removal, Transport and Disposal of Contaminated Water	Gallon	\$
10	Removal, Transport and Disposal of Contaminated Wastewater Sediment	Ton	\$
11	Removal, Transport and Disposal of Petroleum Contaminated Soil	Ton	

PART 9 - VALUE ENGINEERED COST PROPOSAL (VECP)

- 9.1 Bidder is encouraged to develop, prepare, and submit proposals to use different than specified materials, equipment, or methods which, in the Bidder's opinion, would improve the operation specified, or to carry out the Work under contract conditions different from those specified in the Bid Documents, in the form of a VECP.
- 9.2 A VECP is a technique by which the Bidder may, voluntarily and at their own expense, develop methods for performing contract requirements more economically. The objective of the VECP evaluation is to determine that the Bidder's proposal is applied to contract areas which offer considerable opportunities for savings while being consistent with the functional requirements of the Bid Documents. However, the Bidder shall:
- Prepare a Base Bid consistent with the exact requirements of the Bid Documents.
 - Submit with their Bid, any additional VECP describing in full detail the different materials, equipment, methods, or conditions which they propose as follows:
- 9.3 A description of the difference between the existing Contract requirement and the proposed requirement and the advantages or disadvantages of each, including any objective test data;
- 9.4 A list of the Contract requirements which must be changed including Specification changes;
- 9.5 Identification as to the Bid Item for which the VECP applies;
- 9.6 A description and estimate of costs Wood /Pender County may incur in implementation of the VECP such as testing, evaluation, or operation and maintenance costs;
- 9.7 An evaluation utilizing Contract stipulated scheduling methods which a Contract modification accepting the VECP would have on the Contract required period of performance; and
- 9.8 Any actions or scheduling which must be implemented in order to achieve maximum cost reduction related to the VECP.
- Wood may accept or reject in whole or in part any such VECP, without explanation or consideration at Wood's sole discretion. Additionally, VECPs resulting in less than \$10,000 savings will not be considered.

PART 10 - DRAWING INDEX

Drawing 1. Site Location Map

Drawing 2. Site Map

Drawings 3a, 3b, 3c and 3d Underground Utility Maps


PART 11 - APPENDICES

Appendix A: Photo Journal of Structures for Demolition with
Corresponding Map/Aerial Photo of Photograph Locations



Appendix B: Regulated Materials Evaluation Reports – Former Industrial
Brownfields Property, 101 Vitamin Drive Wilmington, North Carolina,
28401 (Reports includes Asbestos and Lead Paint Reports and
Environmental Reports of Wastewater Residuals and Soils)

Appendix C: Erosion and Sedimentation Control Plan

Appendix D: Subsurface Utility Drawings

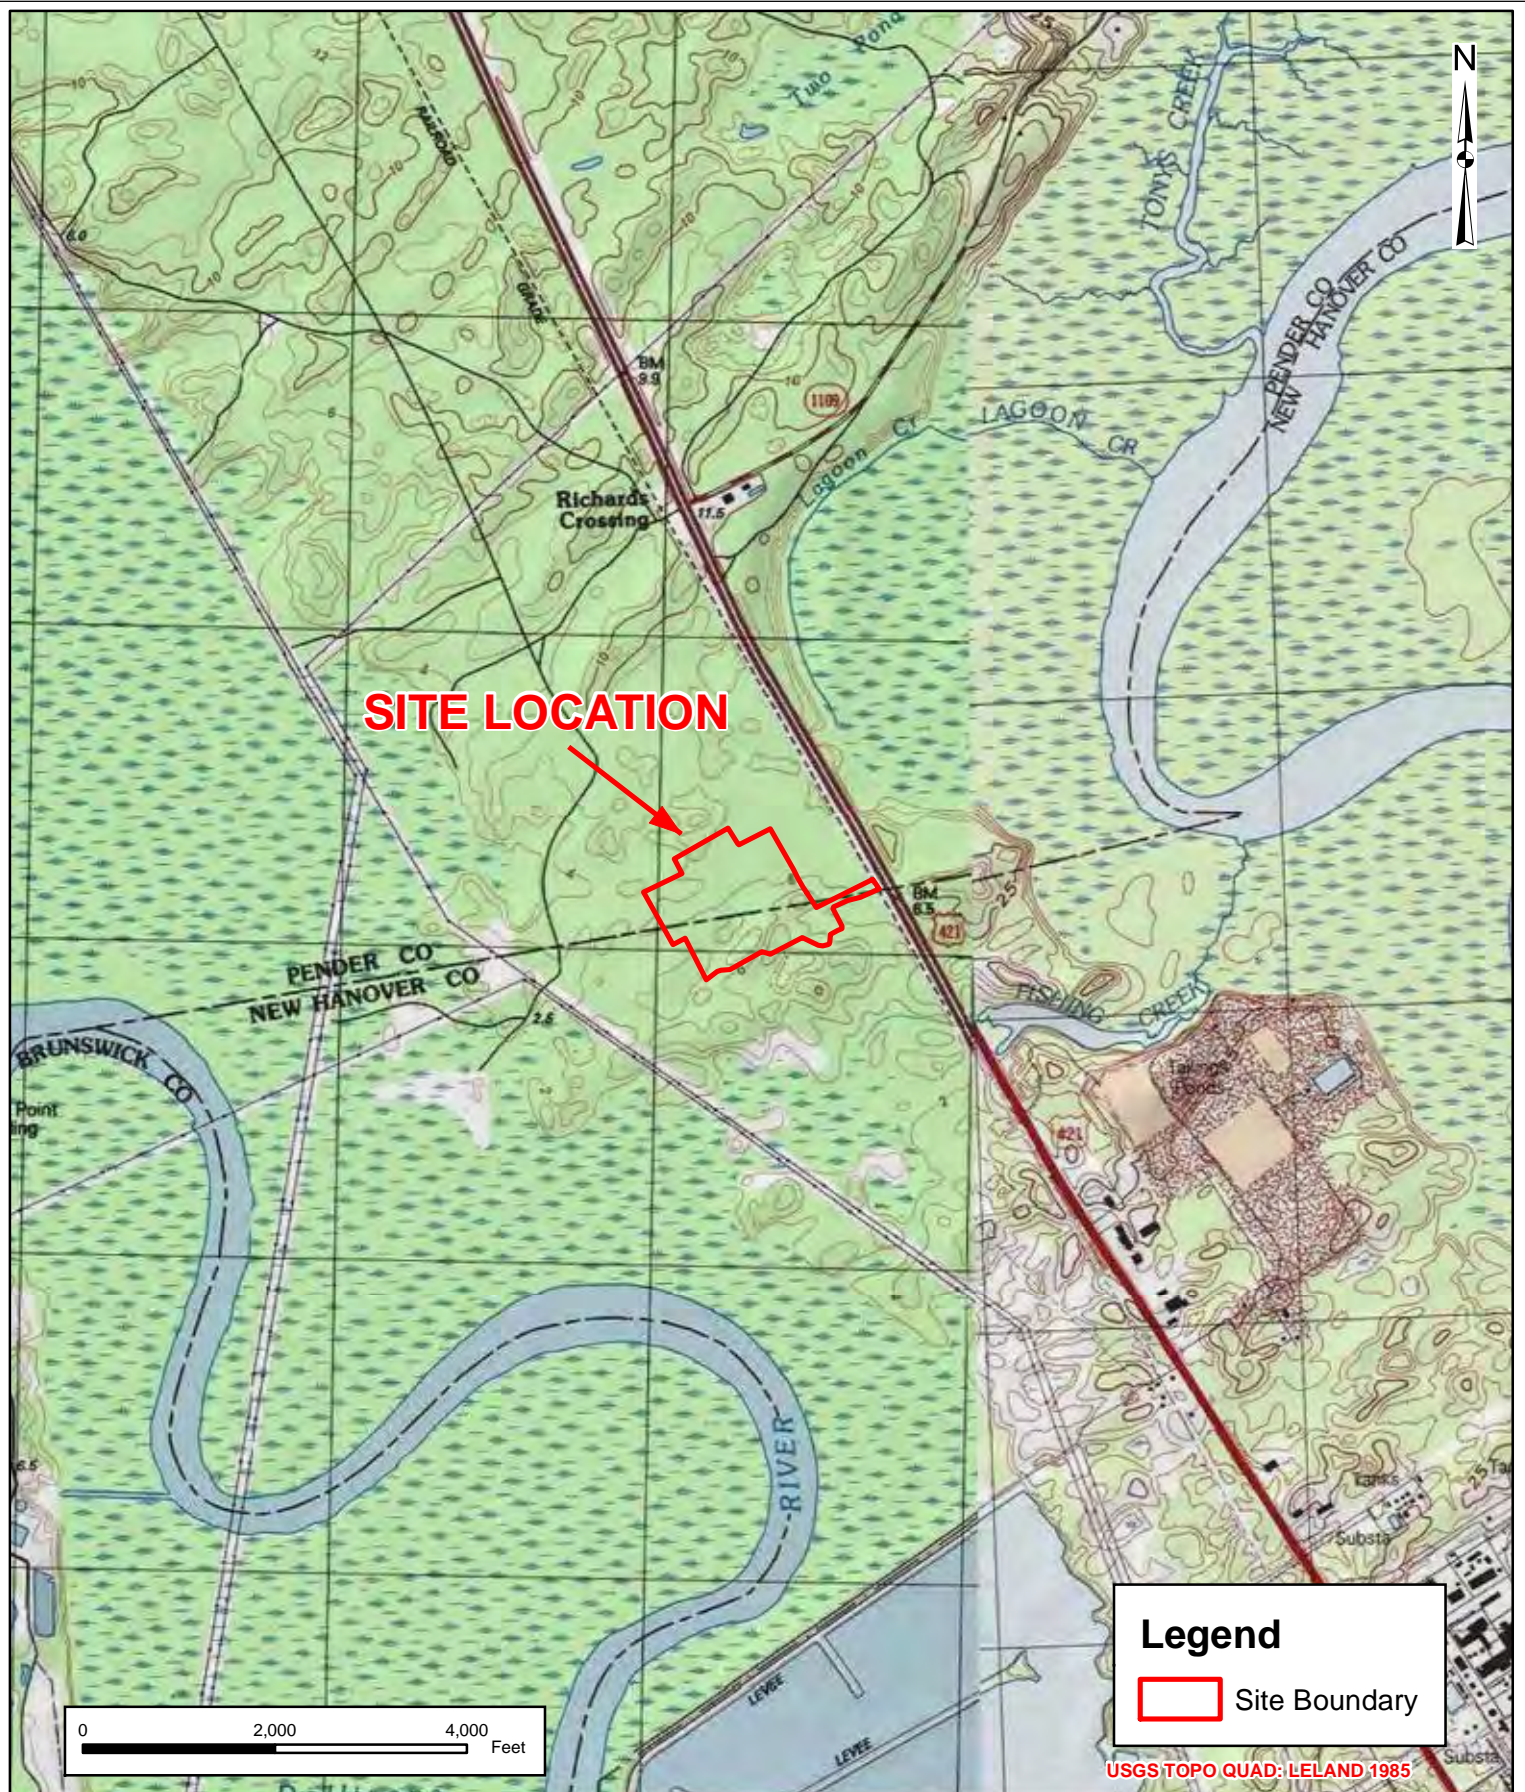

<div>Wood Environment & Infrastructure Solutions, Inc. 4720 Oleander Drive, Suite 110 Wilmington, NC 28403 (910) 452-1185</div>	<div>TITLE: SITE LOCATION MAP</div>	<div>CLIENT: PENDER COUNTY</div>			<div>FIGURE 1</div>
<div>wood.</div>	<div>SITE: FORMER INDUSTRIAL BROWNFIELDS PROPERTY HIGHWAY 421 PENDER COUNTY, NORTH CAROLINA</div>	<div>SCALE: AS SHOWN</div>	<div>DATE: 12/20/2021</div>	<div>PROJECT: 6228210243</div>	
		<div>DRAWN BY: WBM</div>		<div>CHECKED BY: JCP</div>	
		<div>LOCATION: P:\Projects\CLIENTS\Pender County\Demolition Management\Figures, CAD Files\GIS\mxd</div>			

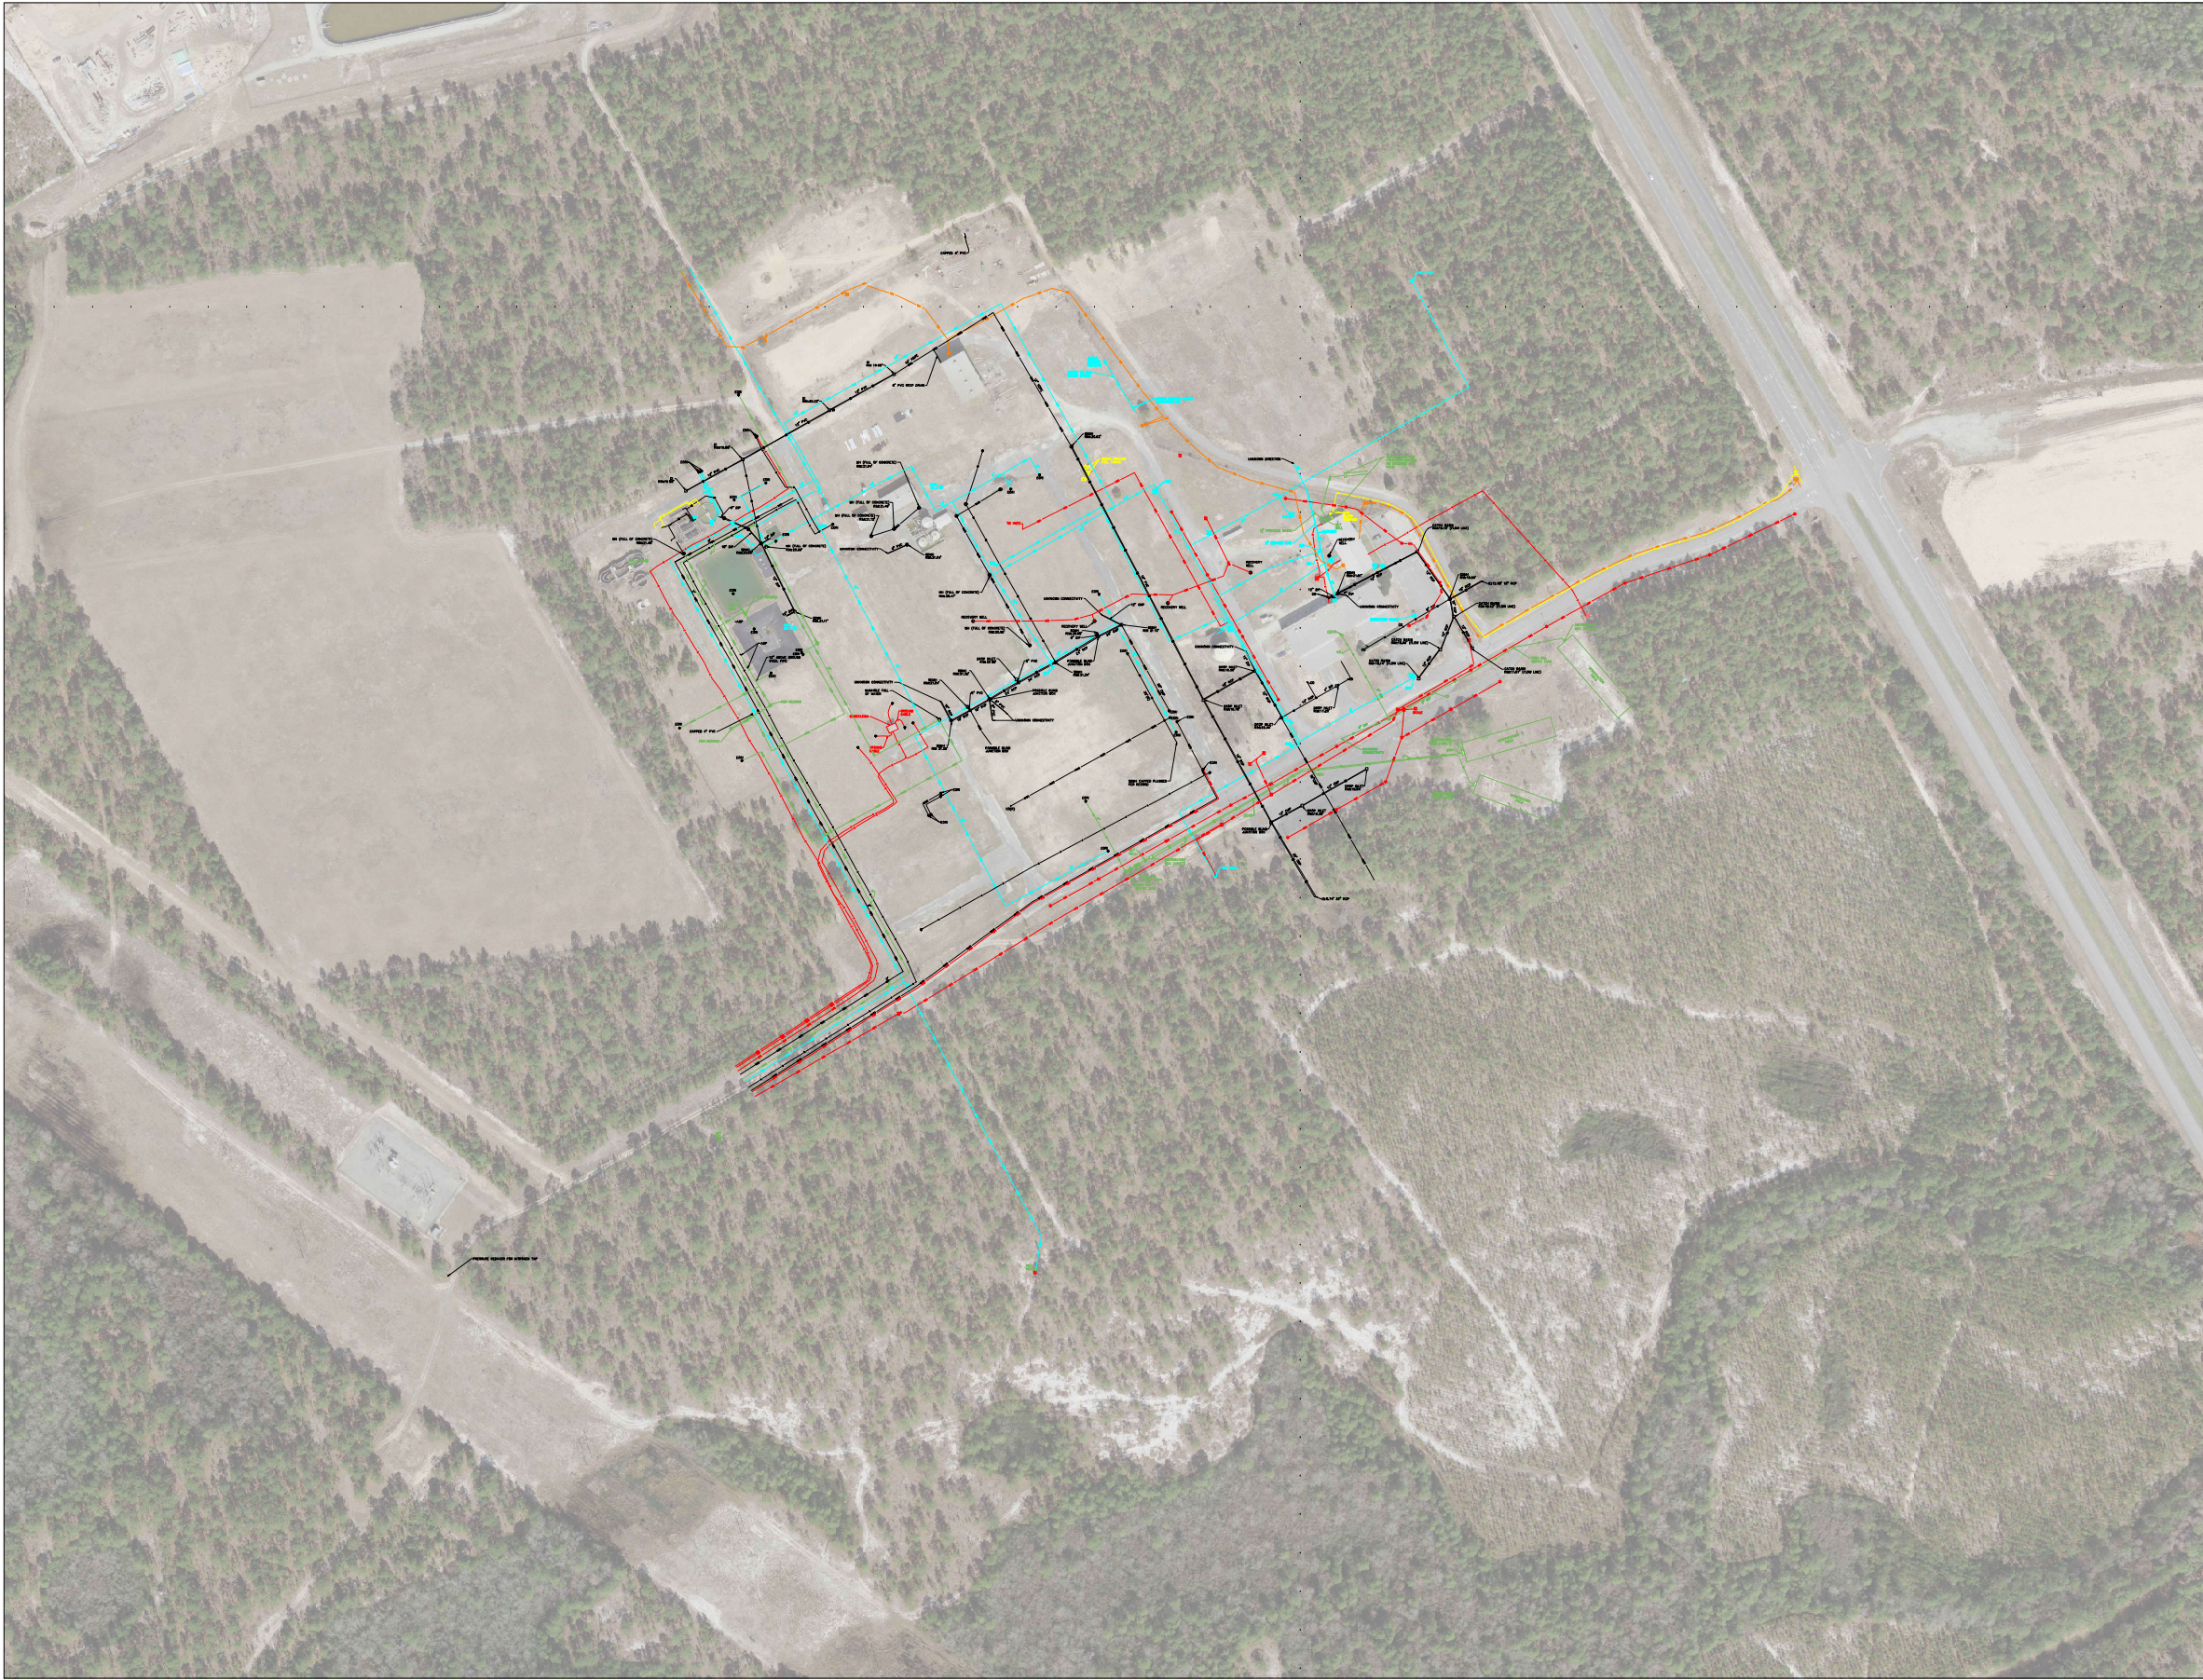

PRELIMINARY PLAT
NOT FOR RECORDATION, CONVEYANCE, OR SALES



UTILITY LEGEND

- | | |
|------|----------------------------|
| CO | CLEAN OUT |
| DI | DROP INLET |
| SSMH | SANITARY SEWER MANHOLE |
| SDMH | STORM DRAIN MANHOLE |
| AGP | ABOVE GRADE PIPE |
| EDW | END OF RECORD INFORMATION |
| FDC | FIRE DEPARTMENT CONNECTION |
| BOV | BLOW OFF VALVE |
| GV | GAS VALVE |
| ICV | IRRIGATION CONTROL VALVE |
| PV | POST INDICATOR VALVE |
| PP | POWER POLE |
| (R) | AS PER UTILITY RECORD |
| WM | WATER METER |
| WV | WATER VALVE |
| WH | FIRE HYDRANT |
| END | END OF INFORMATION |
| LP | LIGHT POLE |
| EB | ELECTRIC BOX |
| TR | TRANSFORMER |
| TH | TELEPHONE HAND HOLE |
| TP | TELEPHONE PEDESTAL |
| WMH | WATER MANHOLE |
| SMH | SEWER MANHOLE |
| SM | STORM MANHOLE |
| RL | RECORD NITROGEN LINE |
| N | NITROGEN LINE |
| A | AIR LINE |
| E | ELECTRIC LINE |
| EL | RECORD ELECTRIC LINE |
| FM | FORCE MAIN LINE |
| FL | RECORD FORCE MAIN LINE |
| G | GAS LINE |
| GL | RECORD GAS LINE |
| SD | STORM DRAIN LINE |
| SL | RECORD STORM DRAIN LINE |
| SS | SANITARY SEWER LINE |
| SSL | RECORD SANITARY SEWER LINE |
| T | TELEPHONE LINE |
| TL | RECORD TELEPHONE LINE |
| FO | TELEPHONE FIBER OPTIC LINE |
| U | UNKNOWN LINE |
| W | WATER LINE |
| WL | RECORD WATER LINE |

UTILITY NOTE:
THE HORIZONTAL UNDERGROUND UTILITY LINES SHOWN REPRESENT QUALITY LEVEL B SUBSURFACE UTILITY ENGINEERING SERVICES. UTILITY MARKS PLACED ON THE GROUND BY MCKIM & CREED ARE NOT TO BE USED FOR CONSTRUCTION PURPOSES. USE OF THIS INFORMATION DOES NOT RELIEVE ANY PARTY FROM THEIR OBLIGATION TO CONTACT THE UTILITY DAMAGE PREVENTION SYSTEM BEFORE DIGGING BEGINS. THIS QUALITY LEVEL B UTILITY INVENTORY DOES NOT GUARANTEE THE EXISTENCE OF EACH UTILITY OR THAT ALL THE UNDERGROUND UTILITIES HAVE BEEN ACCOUNTED FOR. EXACT HORIZONTAL AND VERTICAL POSITIONS CAN ONLY BE VERIFIED WHERE QUALITY LEVEL A (EXPOSURES) HAVE BEEN PERFORMED. SERVICES WERE PROVIDED IN ACCORDANCE WITH THE STANDARD OF PRACTICE FOR THE SUBSURFACE UTILITY ENGINEERING PROFESSION, AMERICAN SOCIETY OF CIVIL ENGINEERS STANDARD GUIDELINE FOR THE COLLECTION AND DEPICTION OF EXISTING SUBSURFACE UTILITY DATA (CI/ASCE 38-02).

DATE	REVISION	INITIAL



1730 Varsity Drive Suite 500
Raleigh, North Carolina 27608
Phone: (919)233-8091, Fax: (919)233-8031
NC FIRM # F-1222
Internet Site: <http://www.mckimcreed.com>


UTILITY MAP
OF
BASF SITE
FOR
WOOD GROUP

DATE: 12/17/2021
WILMINGTON

SCALE: 1" = 50'
PENDER COUNTY
NORTH CAROLINA

PROJECT # : 040820134
PROJ. SVR :
DRAWN BY : ZNG
FIELD BK :
COMP. FILE : w101-040820134
SHEET # : OVERVIEW


Figure 3A



PRELIMINARY PLAT
NOT FOR RECORDATION, CONVEYANCE, OR SALES

UTILITY LEGEND	
CO	CLEAN OUT
DI	DROP INLET
SDMH	SANITARY SEWER MANHOLE
SDMH	STORM DRAIN MANHOLE
AGP	ABOVE GRADE PIPE
EORI	END OF RECORD INFORMATION
FDC	FIRE DEPARTMENT CONNECTION
BOV	BLOW OFF VALVE
GV	GAS VALVE
ICV	IRRIGATION CONTROL VALVE
PIV	POST INDICATOR VALVE
PP	POWER POLE
(R)	AS PER UTILITY RECORD
WM	WATER METER
WV	WATER VALVE
WH	FIRE HYDRANT
END	END OF INFORMATION
LP	LIGHT POLE
EB	ELECTRIC BOX
TR	TRANSFORMER
THH	TELEPHONE HAND HOLE
TP	TELEPHONE PEDESTAL
WMH	WATER MANHOLE
SMH	SEWER MANHOLE
SM	STORM MANHOLE
RL	RECORD NITROGEN LINE
N	NITROGEN LINE
A	AIR LINE
E	ELECTRIC LINE
EL	RECORD ELECTRIC LINE
FM	FORCE MAIN LINE
FL	RECORD FORCE MAIN LINE
G	GAS LINE
GL	RECORD GAS LINE
SD	STORM DRAIN LINE
SDR	RECORD STORM DRAIN LINE
SS	SANITARY SEWER LINE
SSL	RECORD SANITARY SEWER LINE
T	TELEPHONE LINE
TEL	RECORD TELEPHONE LINE
FO	TELEPHONE FIBER OPTIC LINE
U	UNKNOWN LINE
W	WATER LINE
WL	RECORD WATER LINE

UTILITY NOTE:
THE HORIZONTAL UNDERGROUND UTILITY LINES SHOWN REPRESENT QUALITY LEVEL B SUBSURFACE UTILITY ENGINEERING SERVICES. UTILITY MARKS PLACED ON THE GROUND BY MCKIM & CREED ARE NOT TO BE USED FOR CONSTRUCTION PURPOSES. USE OF THIS INFORMATION DOES NOT RELIEVE ANY PARTY FROM THEIR OBLIGATION TO CONTACT THE UTILITY DAMAGE PREVENTION SYSTEM BEFORE DIGGING BEGINS. THIS QUALITY LEVEL B UTILITY INVENTORY DOES NOT GUARANTEE THE EXISTENCE OF EACH UTILITY OR THAT ALL THE UNDERGROUND UTILITIES HAVE BEEN ACCOUNTED FOR. EXACT HORIZONTAL AND VERTICAL POSITIONS CAN ONLY BE VERIFIED WHERE QUALITY LEVEL A (EXPOSURES) HAVE BEEN PERFORMED. SERVICES WERE PROVIDED IN ACCORDANCE WITH THE STANDARD OF PRACTICE FOR THE SUBSURFACE UTILITY ENGINEERING PROFESSION, AMERICAN SOCIETY OF CIVIL ENGINEERS STANDARD GUIDELINE FOR THE COLLECTION AND DEPICTION OF EXISTING SUBSURFACE UTILITY DATA (C/ASCE 38-02).



DATE	REVISION	INITIAL

**MCKIM & CREED**



1730 Varsity Drive Suite 500
Raleigh, North Carolina 27608
Phone: (919)233-8091, Fax: (919)233-8031
NC FIRM # F-1222
Internet Site: <http://www.mckimcreed.com>

UTILITY MAP
OF
BASF SITE
FOR
WOOD GROUP

DATE: 12/17/2021
WILMINGTON
PENDER COUNTY
NORTH CAROLINA

SCALE: 1" = 50'
Figure 3B

PROJECT # : 040820134
PROJ. SVR :
DRAWN BY : ZNG
FIELD BK :
COMP. FILE : wu01-040820134
SHEET # : 1 OF 3

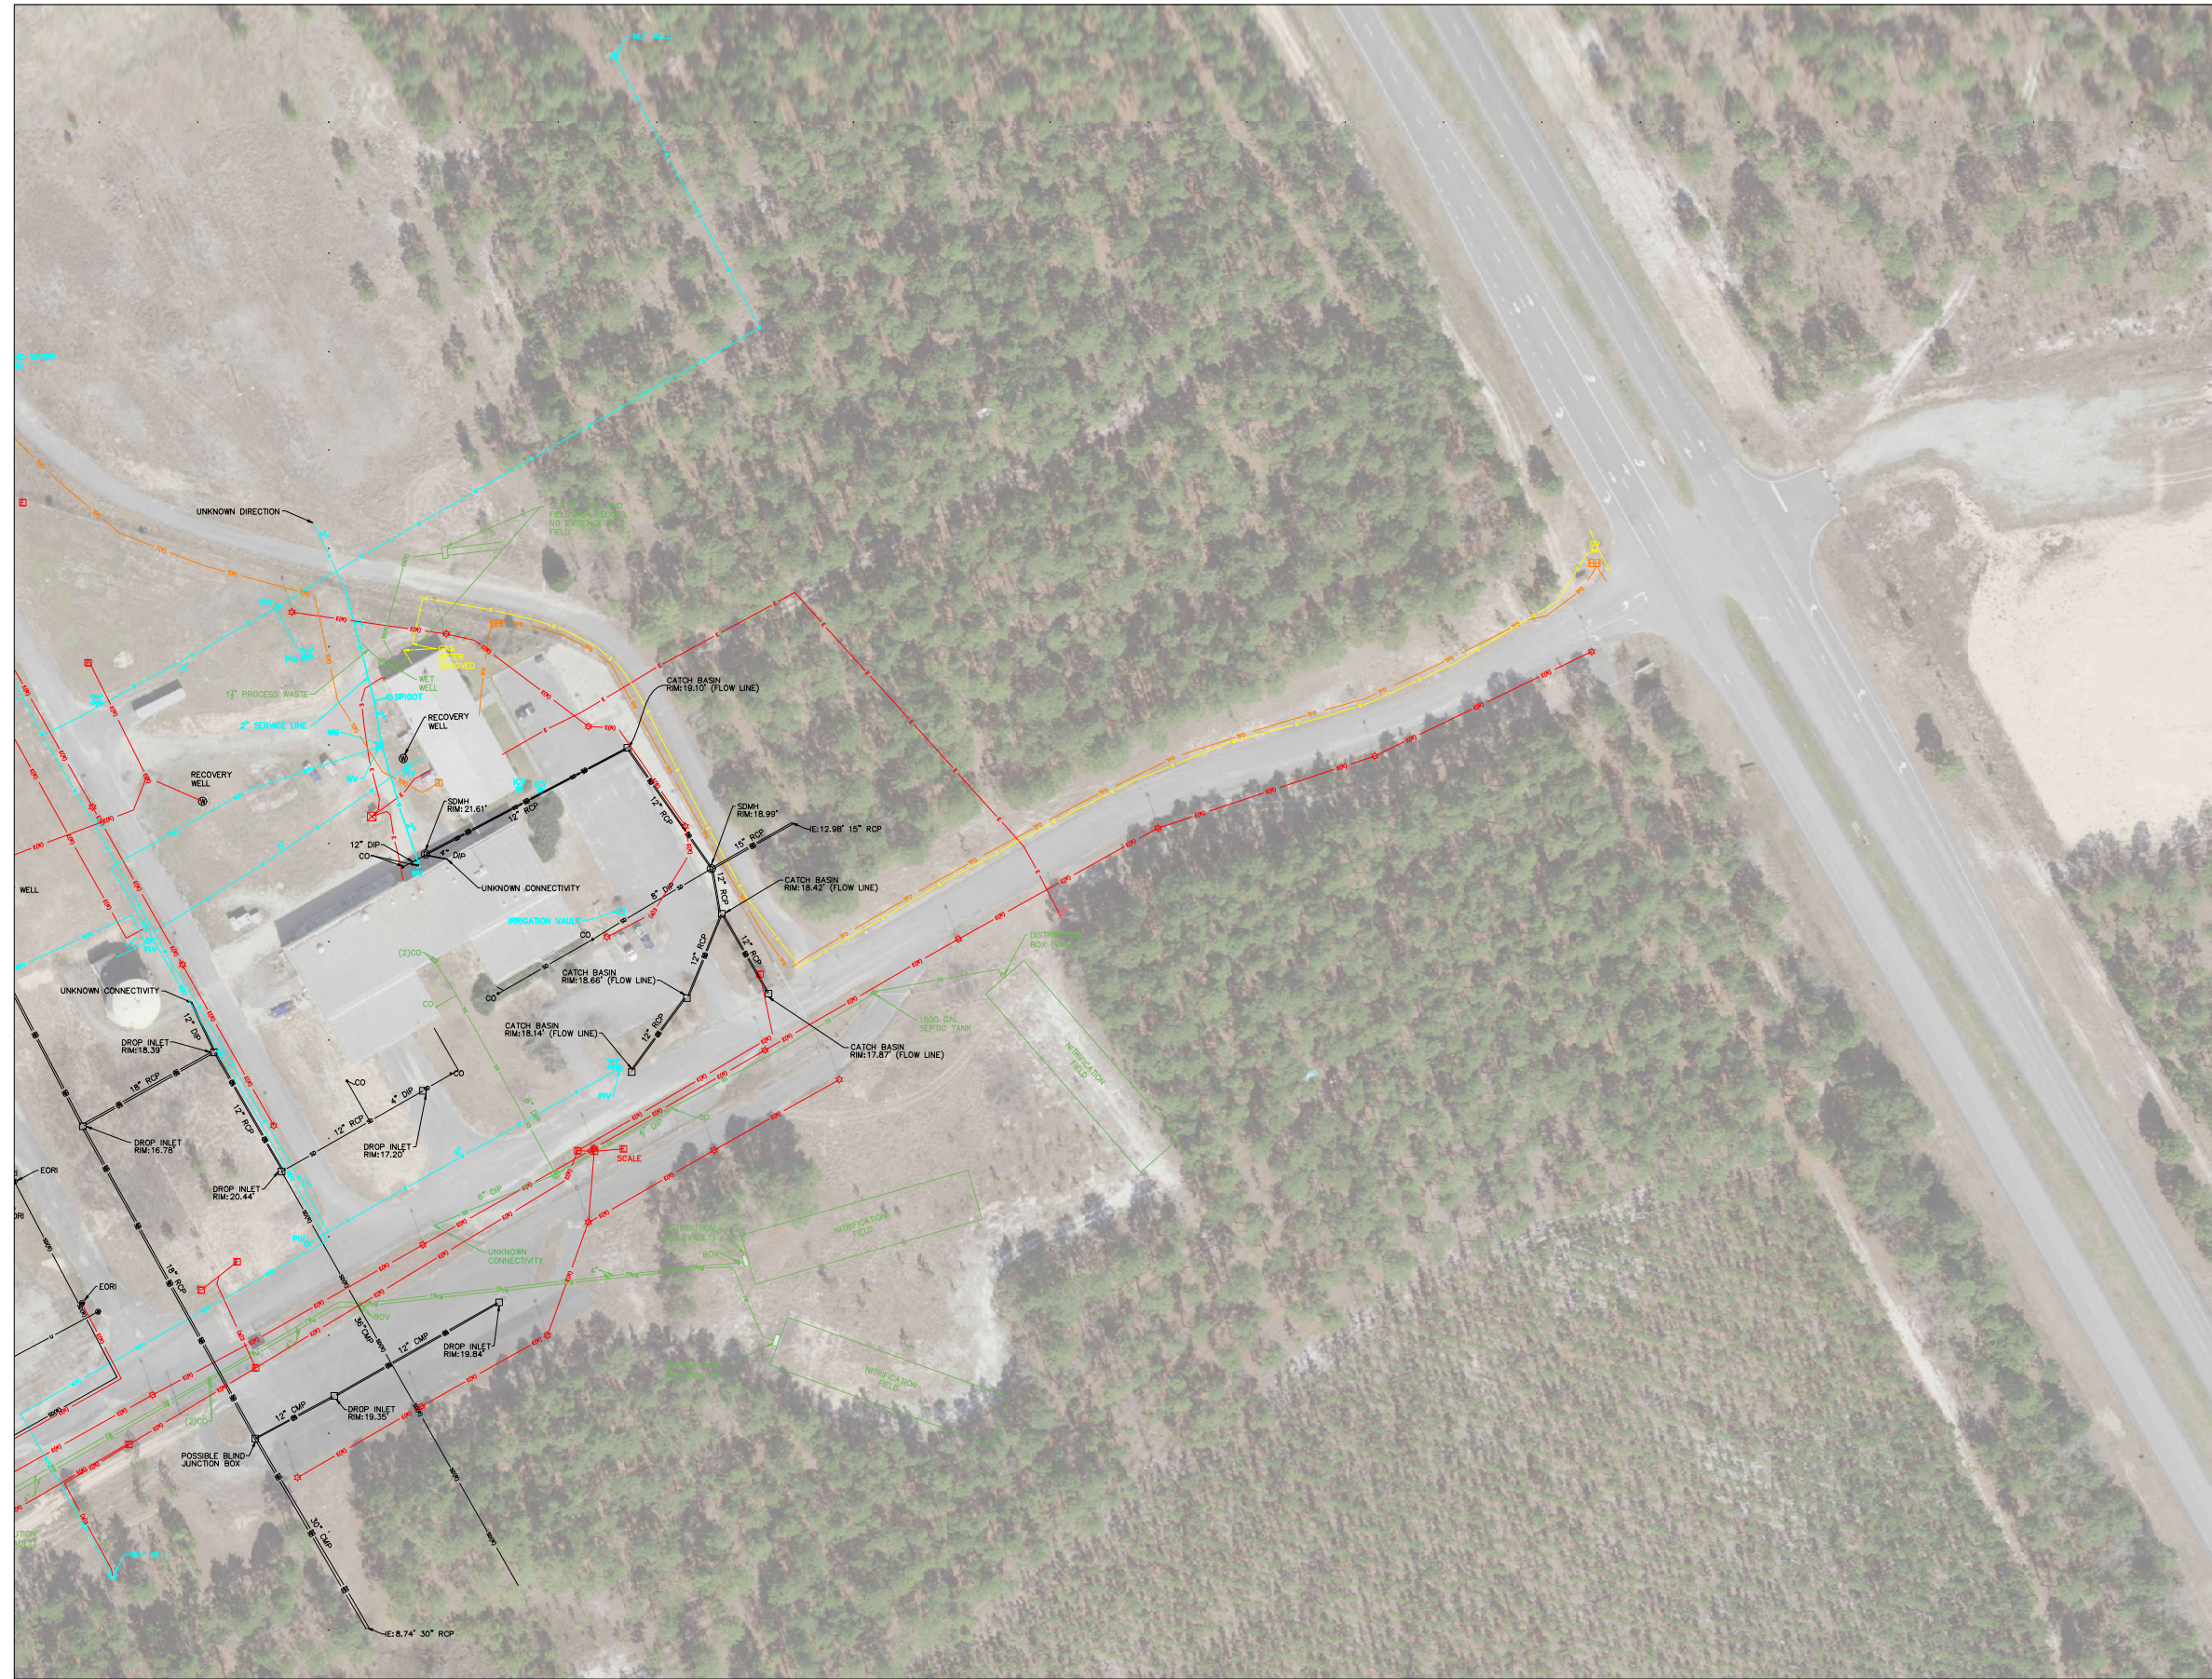

PRELIMINARY PLAT
NOT FOR RECORDATION, CONVEYANCE, OR SALES




UTILITY LEGEND

CO	CLEAN OUT
DI	DROP INLET
SSMH	SANITARY SEWER MANHOLE
SDMH	STORM DRAIN MANHOLE
AGP	ABOVE GRADE PIPE
EDR	END OF RECORD INFORMATION
FDC	FIRE DEPARTMENT CONNECTION
BOV	BLOW OFF VALVE
GV	GAS VALVE
ICV	IRRIGATION CONTROL VALVE
PV	POST INDICATOR VALVE
PP	POWER POLE
(R)	AS PER UTILITY RECORD
WM	WATER METER
WV	WATER VALVE
FX	FIRE HYDRANT
END	END OF INFORMATION
LP	LIGHT POLE
EB	ELECTRIC BOX
TR	TRANSFORMER
THH	TELEPHONE HAND HOLE
TP	TELEPHONE PEDESTAL
WMH	WATER MANHOLE
SMH	SEWER MANHOLE
SM	STORM MANHOLE
NL	RECORD NITROGEN LINE
N	NITROGEN LINE
A	AIR LINE
E	ELECTRIC LINE
EL	RECORD ELECTRIC LINE
FM	FORCE MAIN LINE
FL	RECORD FORCE MAIN LINE
GL	GAS LINE
GL	RECORD GAS LINE
SD	STORM DRAIN LINE
SD	RECORD STORM DRAIN LINE
SSL	SANITARY SEWER LINE
SSL	RECORD SANITARY SEWER LINE
TL	TELEPHONE LINE
TL	RECORD TELEPHONE LINE
FO	TELEPHONE FIBER OPTIC LINE
U	UNKNOWN LINE
W	WATER LINE
WL	RECORD WATER LINE

UTILITY NOTE:

THE HORIZONTAL UNDERGROUND UTILITY LINES SHOWN REPRESENT QUALITY LEVEL B SUBSURFACE UTILITY ENGINEERING SERVICES. UTILITY MARKS PLACED ON THE GROUND BY MCKIM & CREED ARE NOT TO BE USED FOR CONSTRUCTION PURPOSES. USE OF THIS INFORMATION DOES NOT RELIEVE ANY PARTY FROM THEIR OBLIGATION TO CONTACT THE UTILITY DAMAGE PREVENTION SYSTEM BEFORE DIGGING BEGINS. THIS QUALITY LEVEL B UTILITY INVENTORY DOES NOT GUARANTEE THE EXISTENCE OF EACH UTILITY OR THAT ALL THE UNDERGROUND UTILITIES HAVE BEEN ACCOUNTED FOR. EXACT HORIZONTAL AND VERTICAL POSITIONS CAN ONLY BE VERIFIED WHERE QUALITY LEVEL A (EXPOSURES) HAVE BEEN PERFORMED. SERVICES WERE PROVIDED IN ACCORDANCE WITH THE STANDARD OF PRACTICE FOR THE SUBSURFACE UTILITY ENGINEERING PROFESSION, AMERICAN SOCIETY OF CIVIL ENGINEERS STANDARD GUIDELINE FOR THE COLLECTION AND DEPICTION OF EXISTING SUBSURFACE UTILITY DATA (CI/ASCE 38-02).



DATE	REVISION	INITIAL



1730 Varsity Drive Suite 500
Raleigh, North Carolina 27606
Phone: (919)233-8091, Fax: (919)233-8031
NC FIRM # F-1222

Internet Site: <http://www.mckimcreed.com>

DATE:

UTILITY MAP
OF
BASF SITE
FOR
WOOD GROUP

DATE: 12/17/2021
WILMINGTON PENDER COUNTY NORTH CAROLINA

SCALE: 1" = 50'

PROJECT # : 040820134
PROJ. SVR :
DRAWN BY : ZNG
FIELD BK :
COMP. FILE : wu101-040820134
SHEET # : 2 OF 3

Figure 3C




PRELIMINARY PLAT
NOT FOR RECORDATION, CONVEYANCE, OR SALES



- UTILITY LEGEND
- | | |
|------|----------------------------|
| CO | CLEAN OUT |
| DI | DROP INLET |
| SSMH | SANITARY SEWER MANHOLE |
| SDMH | STORM DRAIN MANHOLE |
| AGP | ABOVE GRADE PIPE |
| EORI | END OF RECORD INFORMATION |
| FDC | FIRE DEPARTMENT CONNECTION |
| BOV | BLOW OFF VALVE |
| GV | GAS VALVE |
| ICV | IRRIGATION CONTROL VALVE |
| PIV | POST INDICATOR VALVE |
| PP | POWER POLE |
| (R) | AS PER UTILITY RECORD |
| WM | WATER METER |
| WT | WATER VALVE |
| HY | FIRE HYDRANT |
| ● | END OF INFORMATION |
| ● | LIGHT POLE |
| ● | ELECTRIC BOX |
| ● | TRANSFORMER |
| ● | TELEPHONE HAND HOLE |
| ● | TELEPHONE PEDESTAL |
| ● | WATER MANHOLE |
| ● | SEWER MANHOLE |
| ● | STORM MANHOLE |
| --- | RECORD NITROGEN LINE |
| --- | NITROGEN LINE |
| --- | AIR LINE |
| --- | ELECTRIC LINE |
| --- | RECORD ELECTRIC LINE |
| --- | FORCE MAIN LINE |
| --- | RECORD FORCE MAIN LINE |
| --- | GAS LINE |
| --- | RECORD GAS LINE |
| --- | STORM DRAIN LINE |
| --- | RECORD STORM DRAIN LINE |
| --- | SANITARY SEWER LINE |
| --- | RECORD SANITARY SEWER LINE |
| --- | TELEPHONE LINE |
| --- | RECORD TELEPHONE LINE |
| --- | TELEPHONE FIBER OPTIC LINE |
| --- | UNKNOWN LINE |
| --- | WATER LINE |
| --- | RECORD WATER LINE |

UTILITY NOTE:
THE HORIZONTAL UNDERGROUND UTILITY LINES SHOWN REPRESENT QUALITY LEVEL B SUBSURFACE UTILITY ENGINEERING SERVICES. UTILITY MARKS PLACED ON THE GROUND BY MCKIM & CREED ARE NOT TO BE USED FOR CONSTRUCTION PURPOSES. USE OF THIS INFORMATION DOES NOT RELIEVE ANY PARTY FROM THEIR OBLIGATION TO CONTACT THE UTILITY DAMAGE PREVENTION SYSTEM BEFORE DIGGING BEGINS. THIS QUALITY LEVEL B UTILITY INVENTORY DOES NOT GUARANTEE THE EXISTENCE OF EACH UTILITY OR THAT ALL THE UNDERGROUND UTILITIES HAVE BEEN ACCOUNTED FOR. EXACT HORIZONTAL AND VERTICAL POSITIONS CAN ONLY BE VERIFIED WHERE QUALITY LEVEL A (EXPOSURES) HAVE BEEN PERFORMED. SERVICES WERE PROVIDED IN ACCORDANCE WITH THE STANDARD OF PRACTICE FOR THE SUBSURFACE UTILITY ENGINEERING PROFESSION, AMERICAN SOCIETY OF CIVIL ENGINEERS STANDARD GUIDELINE FOR THE COLLECTION AND DEPICTION OF EXISTING SUBSURFACE UTILITY DATA (CI/ASCE 38-02).



DATE	REVISION	INITIAL

1730 Varsity Drive Suite 500
Raleigh, North Carolina 27608
Phone: (919)233-8091, Fax: (919)233-8031
NC FIRM # F-1222
Internet Site: <http://www.mckimcreed.com>

UTILITY MAP
OF
BASF SITE
FOR
WOOD GROUP

DATE: 12/17/2021
WILMINGTON
PENDER COUNTY
NORTH CAROLINA

SCALE: 1" = 50'
SHEET # : 3 OF 3

PROJECT # : 040820134
PROJ. SVR :
DRAWN BY : ZNG
FIELD BK :
COMP. FILE : wu101-040820134
SHEET # : 3 OF 3
Figure 3D

Appendix A

Photo Journal of Structures for Demolition with Corresponding Map/ Aerial Photo of Photograph Locations



Wood Environment & Infrastructure Solutions, Inc.
5710 Oleander Drive, Suite 110
Wilmington, NC 28403
(910) 452-1185

TITLE:
DEMO STRUCTURES PHOTO NUMBERS

SITE: FORMER INDUSTRIAL BROWNFIELDS PROPERTY
HIGHWAY 421
PENDER COUNTY, NORTH CAROLINA



CLIENT:
PENDER COUNTY

DATE: 12-20-2021	SCALE: AS SHOWN	PROJ.: 6228210243
DR: WMN	CHK: JCP	
LOCATION: P:\Projects\CLIENTS\Pender County\Demolition Management\Figures, CAD Files\GIS\mxd\Demo Map For Photo Log.mxd		

Appendix
A



No.1 – WWTI Round Concrete Settling Basin – Entire structure and associated equipment to be removed.



No.2 – WWTI – Approximately 4' Diameter Concrete Sump. Entire structure and associated piping to be removed.



No.3 – WWT1 – Two Lined Wastewater Treatment Ponds - Liners and associated equipment to be removed.



No.4 – WWT1 – Three Rotating Biological Contactors (RBCs) - RBCs entire structure, concrete containment and supporting equipment to be removed.



No.5 & 6 WWTI - Rectangular Concrete Oxidation Treatment Tank and Round Concrete Vessel
Looking northwest, entire structures and associated equipment to be removed.



No.5 – WWTI – Rectangular Concrete Oxidation Treatment Tank Looking southwest
entire structure, ancillary concrete structure and associated equipment to be removed.



No.7 – WWTI – Miscellaneous Debris Staged South of Areas 5 & 6 - All to be removed.



No.8 – Rectangular Concrete Containment with Fiberglass Railing – Entire concrete structure and associated equipment to be removed.



No.9 – WWTI - Approximately 8' Diameter Concrete Sump Located Between the Wastewater Treatment Ponds - Structure and associated equipment to be removed.



No.10 – Corrugated Metal Building - Entire structure and concrete slab to be removed.



No.11 – Electrical Transformer – Transformer and concrete pad to be removed.



No.12 – Concrete Containment and Tank Farm with Three Steel Insulated Tanks -
Entire containment and associated tanks and equipment to be removed.



No.13-Corrugated Metal Building- Entire building, associated equipment and concrete pad to be removed.



No.14 -Brown Fiberglass Raven Tank – Tank and associated pad to be removed.



No.15 - Looking Northwest, Sealed Fiberglass Tank and Operators Shed Tank, shed, associated equipment and concrete pad and apron to be removed.



No.15 - Looking East, Sealed Fiberglass Tank and Operators Shed All to be removed.



No.16 Corrugated Metal Building – Entire structure, associated equipment and concrete slab to be removed.



No. 17 - Fiberglass Shed - Entire structure, associated equipment asphalt and concrete to be removed.



No.18 - Corrugated Metal Building Entire building and ancillary structures and concrete slabs to be removed.



No. 19 - Former Fire Water Tank and Concrete Block Building Entire structure associated equipment, tank and concrete slab to be removed.



No.20 - Streetlight Typical – 27 to be removed.



No.21- Administration Building Warehouse – Entire structure and foundation to be removed.



No.22 - Main Administration Building – Entire structure and foundation to be removed.



No.23 - Auxiliary Admin Building – Entire Structure and foundation to be removed.



No.24 – Truck Scale – Entire structure and associated components to be removed.



No.25 – Turnstile – Entire structure to be removed.



No.26 – Guard Shack – Entire structure and foundation to be removed.

Appendix B

Regulated Materials Evaluation Reports



Wood Environment & Infrastructure Solutions, Inc.
104 Corporate Boulevard, Suite 407
West Columbia, South Carolina 29169
T: 803-798-1200
www.woodplc.com

December 14, 2021

Mr. Chad McEwen
Pender County Manager
Pender County
805 South Walker Street
Burgaw, North Carolina 28425

Subject: **Regulated Building Materials Evaluation Report
Former Industrial Brownfields Property
Commerce Park, Pender County, North Carolina
Wood Project: 6228-21-0243.02**

Mr. McEwen:

Wood Environment & Infrastructure Solutions, Inc. (Wood) is pleased to present our Regulated Building Materials Report for the above-referenced site, located in Pender County, North Carolina. This report presents relevant background information, our findings, conclusions, and corresponding recommendations.

Background Information

Wood was retained by Pender County to perform a regulated building materials evaluation for the existing structures associated with the former industrial brownfields property located within the Pender Commerce Park at 101 Vitamin Drive in Pender County, North Carolina. The survey and screening were conducted in accordance with Wood's *Proposal for Demolition Management*, dated October 5, 2021 (Wood Proposal PROP21CARO394).

Based on our understanding of your request, Pender County is planning to demolish the existing structures at the site. Wood understands that the site was developed as a vitamin manufacturing operation in the 1980s.

Review of Existing Data

It is our understanding that no documentation of previous asbestos or lead based paint surveys or sampling was available for the site.

Asbestos-Containing Material Survey

Wood was retained to perform an asbestos survey of the existing structures at the site. The existing structures consisted of the Administrative Building, Administrative Annex, Guard House, Warehouse, Pump House, Northeast Building, Wastewater System RBC Area, Electrical Buildings, and Tank Farm. The purpose of the survey was to meet the asbestos sampling and reporting

requirements of the United States (US) Occupational Safety and Health Administration (OSHA), US Environmental Protection Agency's (EPA) National Emissions Standards for Hazardous Air Pollutants (NESHAP), and North Carolina Department of Health and Human Services (NCDHHS) regulations. The scope of the Asbestos Containing Material (ACM) survey did not include destructive techniques as an attempt to locate suspect concealed ACM. The purpose of the survey was to provide information related to ACM for planning purposes related to anticipated demolition of the on-site structures.

The US EPA, OSHA, and NCDHHS have published regulations, guidelines, and recommendations regarding inspection and sampling for ACM, which were adhered to as appropriate during our field efforts.

Our services began with Wood personnel, Mr. Shaun Rankin (a NCDHHS licensed Asbestos accredited Building Inspector), conducting a visual survey on November 11 and 12, 2021. A copy of Mr. Rankin's NCDHHS license is provided in **Appendix A**. A visual survey was performed to locate and inventory materials suspected to contain asbestos (suspect materials). Suspect materials were grouped based on material homogeneity. A homogeneous material is one that appears to be uniform in texture and color and appears to have been applied or installed during the same general time period. Accessible friable and nonfriable suspect ACM were considered during the survey. Friable materials are those materials that can be pulverized or reduced to powder by hand pressure. A sampling plan was determined, and bulk samples of suspect materials were obtained.

The US EPA, OSHA, and NCDHHS allow accredited AHERA Building Inspectors to visually determine that certain materials (i.e. fiberglass, wood, metal, etc.) are not suspected to contain asbestos. As such, Wood did not inventory, sample, or otherwise assess these non-suspect materials. We did not disassemble equipment or personal property to access materials that may have been concealed. Additional materials may be present within these inaccessible areas.

The sample locations were generally chosen at random, and sampling was performed in general accordance with sampling requirements of the US EPA AHERA regulation [40 CFR 763.86] for each homogeneous material. A total of sixty-one (61) bulk samples from twenty-four (24) separate homogenous areas were collected from the buildings during the survey. The samples were submitted to EMSL's National Voluntary Laboratory Accreditation Program (NVLAP) accredited laboratory (NVLAP No. 200671-0) in Kernersville, North Carolina for analysis by Polarized Light Microscopy (PLM) coupled with dispersion staining using the test method included in Appendix E to Subpart E of 40 Code of Federal Regulations (CFR) Part 763 and EPA/600/R-93/116. A signed chain-of-custody form is maintained with the samples until they are returned or disposed of. The laboratory results of the PLM analyses and chain-of-custody forms are presented in **Appendix B**. Table 1 below summarizes the results of our asbestos survey.

Table 1: Summary of Suspect ACM Located

HA	Sample Numbers	Suspect Asbestos Containing Material Description	Sample Location(s)	Sample Analytical Results
1	AS-1	White Patch Caulk	Administration Building Roof	ND
	AS-2			
2	AS-3	Black Flashing	Administration Building Roof	ND
	AS-4			
3	AS-5	Grey Caulk	Administration Building Roof	ND
	AS-6			
4	AS-7	Black Flashing AHU	Administration Building Roof	ND
	AS-8			
5	AS-9	Blue/Green Patch Caulk	Administration Building Roof	ND
	AS-10			
6	AS-11	Tan Sheet Vinyl	Guard House	ND
	AS-12			
7	AS-13	White Window Caulk	Guard House	ND
	AS-14			
8	AS-15	Brown Covebase Molding/Mastic	Guard House	ND
	AS-16			
9	AS-17	Asphalt Shingle	Guard House Roof	ND
	AS-18			
10	AS-19	Grey w/White Streaks 12" x 12" VFT/Mastic	Administration Building	ND
	AS-20			
11	AS-21	Tan Covebase Molding/Mastic	Administration Building	ND
	AS-22			
12	AS-23	2' x 4' ACT	Administration Building	ND
	AS-24			
13	AS-25	Tan w/White Streaks 12" x 12" VFT/Mastic	Administration Building	ND
	AS-26			
14	AS-27	White w/Gray Streaks 12" x 12" VFT/Mastic	Administration Building	ND
	AS-28			
15	AS-29	Wallboard/Joint Compound	Administration Building	ND
	AS-30			
	AS-31			
	AS-32			
	AS-33			
	AS-34			
16	AS-35			
	AS-36	Beige 12" x 12" VFT/Mastic	Administrative Annex	ND

HA	Sample Numbers	Suspect Asbestos Containing Material Description	Sample Location(s)	Sample Analytical Results
	AS-37			
17	AS-38	Tan Covebase Molding/Mastic	Administrative Annex	ND
	AS-39			
18	AS-40	Brown Covebase Molding/Mastic	Administrative Annex	ND
	AS-41			
19	AS-42	2' x 4' ACT	Administrative Annex	ND
	AS-43			
20	AS-44	Wallboard/Joint Compound	Administrative Annex	ND
	AS-45			
	AS-46			
	AS-47			
	AS-48			
	AS-49			
	AS-50			
21	AS-51	Asphaltic Roof Layer	Pump House	8% Chrysotile
	AS-52			PS
22	AS-53	Pipe TSI	NE Building	ND
	AS-54			
	AS-55			
23	AS-56	Pipe TSI	Wastewater System RBC Area	ND
	AS-57			
	AS-58			
24	AS-59	Tank Insulation - Top	Tank Farm	ND
	AS-60			
	AS-61			

HA: Homogenous Area

VFT – Vinyl Floor Tile

PS – Positive Stop

ND: None Detected

ACT – Acoustical Ceiling Tile

No suspect materials were identified or sampled from the Warehouse or Electrical Buildings.

Findings

As per the laboratory analytical results, ACMs were identified in the asphaltic roof layer of the pump house. No ACM was identified in the other samples collected for this survey.

Lead Paint Screening

Wood's scope of work included screening for lead paint. Thirteen paint chip samples were collected from various surface areas associated with the on-site buildings and associated improvements.

The samples were collected from each component by removing a representative sample of the coating (paint chip) from the base component until the substrate was visible. The paint chip samples were submitted to EMSL's Kernersville, North Carolina for analysis utilizing Flame Atomic

Absorption Spectroscopy using the US EPA Method SW846-3050B/7000B. The analytical reports are included in **Appendix C**. The painted components sampled, along with corresponding lead content (percent by weight), are summarized in the following table. The United States federal government definition of lead-based paint (LBP) is a paint containing lead levels greater than or equal to 0.5% by weight. Lead-containing paint is currently defined by the federal government as concentrations of lead above the laboratory detection limits. LBP was identified in brown paint collected from a light pole; and lead-containing paint was identified in white paint collected from the oxidation system walkway, white paint collected from the West Electrical Building, cream paint collected from the Main Water Tank, and red paint from the Fire System Fuel Tank. Lead was not detected above the reporting limit for the other samples collected for this survey.

Table 2: Lead-in Paint Analytical Data Summary

Sample ID	Material Description	Sample Location	Sample Analytical Results (Percent Weight)*
P-1	Tan	Walkway Oxidation System	0.023%
P-2	White	Walkway Oxidation System	<0.0080%
P-3	White	RBC Tank 1	<0.0080%
P-4	Grey	Settling Basin Walkway	<0.0080%
P-5	Red	Fire Water Pump	<0.0080%
P-6	White	West Electrical Building	0.016%
P-7	Cream	Tank Farm	<0.0080%
P-8	White	NE Building	<0.0080%
P-9	Brown	Light Pole	0.76%
P-10	Cream	Main Water Tank	0.045%
P-11	Red	Fire System Fuel Tank	0.23%
P-12	White	Annex Building Wall	<0.0080%
P-13	White	Warehouse Wall	<0.0080%

* The reporting limit for the lead paint chip sample is reported in percent lead by weight and is based on the weight of the sample. EMSL's reporting limit was 0.0080 percent by weight based on the individual sample weights.

Conclusions and Recommendations

Based on our site observations, sampling, and analysis, we offer the following conclusions and Recommendations:

US OSHA requires the Building Owner to inform contractors of the known or suspected hazardous or potentially hazardous materials that may be impacted during disturbance or demolition. Wood recommends contractors or employees performing work to include contact, damage or disturbance of the materials summarized in this report be informed of the findings in this report. While Wood made reasonable efforts to access suspect ACM and lead based paint that could be present at the subject site, additional ACM or lead paint may be present in areas that were not readily accessed during our site work.

Asbestos-Containing Materials Survey

1. Wood has performed an asbestos survey of the subject building. The asbestos survey met the US EPA NESHAP inspection requirements for the areas surveyed. The results of the survey identified ACM at the site.

Asbestos was detected at eight percent Chrysotile (8% Chrysotile) in the asphaltic roof layer of the Pump House in HA-21. The approximate 450-foot square (450 ft²) of asbestos-containing roofing material was in poor condition at the time of the site survey.

2. It is the Building Owner's responsibility to inform contractors of the known or suspected hazardous or potentially hazardous materials that may be impacted during renovation or demolition.
3. Current NESHAP regulations, as well as the State of North Carolina, require that ACM be removed and properly disposed of prior to demolition or renovation activities that will render ACM friable. NESHAP regulations also require a notification to be submitted 10 working days prior to any demolition project, regardless of the presence or absence of ACM. The OSHA Construction Standard and the EPA-NESHAP require that contractors have a "Competent Person" on site to identify and properly address unreported suspect asbestos-containing materials that may be discovered during renovation or demolition activities. Current NESHAP regulations require that all RACM be disposed of in landfills approved to accept asbestos waste and that proper waste manifest documentation be prepared and maintained.
4. Although our asbestos survey attempted to locate suspect ACM present within the subject structures, additional unreported suspect ACM may be present in concealed or hidden areas of the building. Should suspect materials in addition to those reported herein be uncovered, Wood recommends that work activities be immediately halted until the materials can be sampled and analyzed to confirm or rebut the presence of asbestos.

Lead Paint Screening

1. Detectable concentrations of lead were reported above laboratory detection limits in five of the thirteen samples of paint collected during the screening.
2. There are no current regulations that require the removal of painted coatings containing lead. Issues associated with demolition of buildings that have components with paints containing lead include the protection of workers during the demolition work efforts and the disposal of the demolition debris.
3. While Wood made reasonable efforts to access suspect lead coatings that could be present in the subject building, additional coatings are likely to present in areas that may be concealed or hidden and were not accessed during our site work or in coatings that did not encompass a large surface area.

Qualifications

This report summarizes Wood's evaluation of the conditions observed at the site during the survey. Our findings are based upon our observations at the subject property and analyses of the samples obtained at the time of this survey. Only materials that were accessible and visible at the time of the inspection were evaluated, there is the potential that additional concealed materials may exist. Any suspect ACM or lead paint encountered that is not addressed in this survey should be treated as ACM or lead paint until sampled and analyzed. Any conditions discovered which deviate from the data contained in this report should be presented to us for our evaluation.

Limitations of the Assessment

This survey was conducted to reflect materials that would be impacted by the planned demolition at the site. Destructive access was not used to attempt to sample any materials hidden in wall cavities, and all samples were collected from areas where they could be seen. Any materials not identified in this report, or previous reports, must be sampled and identified to ensure that ACMs are not improperly disturbed.

The conclusions of the report are professional opinions based solely upon visual site observations, and interpretations of analyses as described in this report. The opinions presented herein apply to the site conditions existing at the time of the investigation and interpretation of current regulations pertaining to regulated ACMs. Therefore, opinions and recommendations provided herein might not apply to future conditions at the site. The current regulations should always be verified prior to any work involving asbestos or other regulated materials. This limited survey is not intended to be used as an abatement design document. All existing conditions, quantities, and locations should be verified prior to abatement.

It should be noted that no survey can be comprehensive or exhaustive enough to eliminate the possibility of asbestos or lead paint being present at the site. Therefore, the completion of this or any survey for asbestos and lead should not be considered a warranty or guarantee that these materials do not exist, even if they are not detected through a survey.

Closing

Wood appreciates the opportunity to continue to provide our services to you. If you have questions, please contact the undersigned at your convenience.

Sincerely,

Wood Environment & Infrastructure Solutions, Inc.



Shaun C. Rankin, CHMM
Principal Scientist



Michael J. Ebel
Vice President/Principal Scientist

Figure

Appendices

- Appendix A: Inspector License
- Appendix B: Laboratory Results of Bulk Samples - Asbestos
- Appendix C: Laboratory Results of Paint Chip Samples

Former BASF



Wastewater System RBC Area

Northeast Building

Electrical Buildings

Tank Farm

Pump House

Warehouse

Administrative Annex

Administrative Building

APPENDIX A

INSPECTOR ACCREDITATION



Shaun C Rankin
137 Ashley Hills Dr
Lexington, SC 29072

134315

North Carolina
Asbestos Accreditation

EXPIRATION			
06-30-2022			
DOB	SEX	HT	WT
08-06-1962	M	6'2"	210
CLASS	#		EXP
INSPECTOR	12324		06-22

APPENDIX B

LABORATORY RESULTS OF BULK SAMPLES - ASBESTOS



EMSL Analytical, Inc.

706 Gralin Street Kernersville, NC 27284

Tel/Fax: (336) 992-1025 / (336) 992-4175

<http://www.EMSL.com> / greensborolab@emsl.com

EMSL Order: 022108344

Customer ID: AMECTT25

Customer PO: 6228210243.02

Project ID:

Attention: Shaun Rankin

Wood Env. & Infrastructure Solutions

104 Corporate Boulevard, Suite 407

West Columbia, SC 29169

Phone:

Fax: (803) 750-1303

Received Date: 11/16/2021 9:45 AM

Analysis Date: 11/17/2021 - 11/18/2021

Collected Date: 11/12/2021

Project: 6228210243.02

Test Report: Asbestos Analysis of Bulk Materials via EPA 600/R-93/116 Method using Polarized Light Microscopy

Sample	Description	Appearance	Non-Asbestos		Asbestos
			% Fibrous	% Non-Fibrous	% Type
AS-1 022108344-0001	White Patch Caulk	White Non-Fibrous Homogeneous		10% Ca Carbonate 90% Non-fibrous (Other)	None Detected
AS-2 022108344-0002	White Patch Caulk	White Non-Fibrous Homogeneous		10% Ca Carbonate 90% Non-fibrous (Other)	None Detected
AS-3 022108344-0003	Black Flashing	Gray/White Fibrous Homogeneous	35% Synthetic	65% Non-fibrous (Other)	None Detected
AS-4 022108344-0004	Black Flashing	Gray/White Fibrous Homogeneous	90% Synthetic	10% Non-fibrous (Other)	None Detected
AS-5 022108344-0005	Grey Caulk	White/Clear Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
AS-6 022108344-0006	Grey Caulk	White Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
AS-7 022108344-0007	Black Flashing AHU	Tan/Silver/Rust Non-Fibrous Heterogeneous	8% Glass	92% Non-fibrous (Other)	None Detected
AS-8 022108344-0008	Black Flashing AHU	Tan/White/Silver Non-Fibrous Heterogeneous		100% Non-fibrous (Other)	None Detected
AS-9 022108344-0009	Blue/ Green Patch Caulk	Green Fibrous Homogeneous	25% Synthetic	75% Non-fibrous (Other)	None Detected
AS-10 022108344-0010	Blue/ Green Patch Caulk	Blue/Green Fibrous Homogeneous	80% Synthetic	20% Non-fibrous (Other)	None Detected
AS-11-Flooring 022108344-0011	Tan Sheet Vinyl	Brown/Gray Fibrous Heterogeneous	5% Synthetic	95% Non-fibrous (Other)	None Detected
AS-11-Mastic 022108344-0011A	Tan Sheet Vinyl	Brown/Tan Non-Fibrous Homogeneous	<1% Cellulose <1% Synthetic	100% Non-fibrous (Other)	None Detected
AS-12-Flooring 022108344-0012	Tan Sheet Vinyl	Beige Fibrous Heterogeneous	15% Cellulose 3% Synthetic	82% Non-fibrous (Other)	None Detected
AS-12-Mastic 022108344-0012A	Tan Sheet Vinyl	Yellow Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
AS-13 022108344-0013	White Window Caulk	Gray/Clear Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
AS-14 022108344-0014	White Window Caulk	Clear Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected

Initial report from: 11/19/2021 08:38:12



EMSL Analytical, Inc.

706 Gralin Street Kernersville, NC 27284

Tel/Fax: (336) 992-1025 / (336) 992-4175

<http://www.EMSL.com/greensborolab@emsl.com>

EMSL Order: 022108344

Customer ID: AMECTT25

Customer PO: 6228210243.02

Project ID:

Test Report: Asbestos Analysis of Bulk Materials via EPA 600/R-93/116 Method using Polarized Light Microscopy

Sample	Description	Appearance	Non-Asbestos		Asbestos
			% Fibrous	% Non-Fibrous	% Type
AS-15-Cove Base 022108344-0015	Brown Covebase Molding/ Mastic	Brown Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
AS-15-Mastic 022108344-0015A	Brown Covebase Molding/ Mastic	Clear/Orange Non-Fibrous Homogeneous	<1% Cellulose 1% Fibrous (Other)	99% Non-fibrous (Other)	None Detected
AS-16-Cove Base 022108344-0016	Brown Covebase Molding/ Mastic	Brown Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
AS-16-Mastic 022108344-0016A	Brown Covebase Molding/ Mastic	Yellow/Clear Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
AS-17 022108344-0017	Asphalt Shingle	Black Fibrous Heterogeneous	5% Glass	95% Non-fibrous (Other)	None Detected
AS-18 022108344-0018	Asphalt Shingle	Black Fibrous Heterogeneous	5% Glass	95% Non-fibrous (Other)	None Detected
AS-19-Floor Tile 022108344-0019	Grey w/ White Streaks 12x12 FT/ Mastic	Gray Non-Fibrous Homogeneous		20% Quartz 80% Non-fibrous (Other)	None Detected
AS-19-Mastic 022108344-0019A	Grey w/ White Streaks 12x12 FT/ Mastic	Black Non-Fibrous Homogeneous	3% Cellulose	97% Non-fibrous (Other)	None Detected
AS-20-Floor Tile 022108344-0020	Grey w/ White Streaks 12x12 FT/ Mastic	Gray Non-Fibrous Homogeneous		20% Quartz 80% Non-fibrous (Other)	None Detected
AS-20-Mastic 022108344-0020A	Grey w/ White Streaks 12x12 FT/ Mastic	Black Non-Fibrous Homogeneous	5% Cellulose	95% Non-fibrous (Other)	None Detected
AS-21-Cove Base 022108344-0021	Tan Covebase Molding/ Mastic	Tan Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
AS-21-Mastic 022108344-0021A	Tan Covebase Molding/ Mastic	Tan/Yellow Non-Fibrous Homogeneous	<1% Cellulose	100% Non-fibrous (Other)	None Detected
AS-22-Cove Base 022108344-0022	Tan Covebase Molding/ Mastic	Tan Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
AS-22-Mastic 022108344-0022A	Tan Covebase Molding/ Mastic	Yellow Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
AS-23 022108344-0023	2x4 Ceiling Tile	Tan Fibrous Heterogeneous	45% Cellulose 15% Glass	35% Perlite 5% Non-fibrous (Other)	None Detected
AS-24 022108344-0024	2x4 Ceiling Tile	Tan/White Fibrous Homogeneous	45% Cellulose 15% Glass	35% Perlite 5% Non-fibrous (Other)	None Detected
AS-25-Floor Tile 022108344-0025	Tan w/ White Streaks 12x12 FT/ Mastic	Tan Non-Fibrous Homogeneous		20% Quartz 80% Non-fibrous (Other)	None Detected
AS-25-Mastic 022108344-0025A	Tan w/ White Streaks 12x12 FT/ Mastic	Brown/Yellow Non-Fibrous Homogeneous	<1% Cellulose	100% Non-fibrous (Other)	None Detected
AS-26-Floor Tile 022108344-0026	Tan w/ White Streaks 12x12 FT/ Mastic	Tan Non-Fibrous Homogeneous		20% Quartz 80% Non-fibrous (Other)	None Detected

Initial report from: 11/19/2021 08:38:12



EMSL Analytical, Inc.

706 Gralin Street Kernersville, NC 27284

Tel/Fax: (336) 992-1025 / (336) 992-4175

<http://www.EMSL.com> / greensborolab@emsl.com

EMSL Order: 022108344

Customer ID: AMECTT25

Customer PO: 6228210243.02

Project ID:

Test Report: Asbestos Analysis of Bulk Materials via EPA 600/R-93/116 Method using Polarized Light Microscopy

Sample	Description	Appearance	Non-Asbestos		Asbestos
			% Fibrous	% Non-Fibrous	% Type
AS-26-Mastic 022108344-0026A	Tan w/ White Streaks 12x12 FT/ Mastic	Black Non-Fibrous Homogeneous	3% Cellulose	97% Non-fibrous (Other)	None Detected
AS-27-Floor Tile 022108344-0027	White w/ Grey Streaks 12x12 FT/ Mastic	Tan/White Non-Fibrous Homogeneous		20% Quartz 80% Non-fibrous (Other)	None Detected
AS-27-Mastic 022108344-0027A	White w/ Grey Streaks 12x12 FT/ Mastic	Brown/Black Non-Fibrous Homogeneous	<1% Cellulose	100% Non-fibrous (Other)	None Detected
AS-28-Floor Tile 022108344-0028	White w/ Grey Streaks 12x12 FT/ Mastic	White Non-Fibrous Homogeneous		20% Quartz 80% Non-fibrous (Other)	None Detected
AS-28-Mastic 022108344-0028A	White w/ Grey Streaks 12x12 FT/ Mastic	Black Non-Fibrous Homogeneous	<1% Cellulose	100% Non-fibrous (Other)	None Detected
AS-29-Wallboard 022108344-0029	Wallboard/ Joint Compound	Gray Fibrous Heterogeneous	6% Cellulose <1% Glass	94% Non-fibrous (Other)	None Detected
AS-29-Joint Compound 022108344-0029A	Wallboard/ Joint Compound	White Non-Fibrous Homogeneous		30% Ca Carbonate 70% Non-fibrous (Other)	None Detected
AS-29-Tape 022108344-0029B	Wallboard/ Joint Compound	Tan Fibrous Homogeneous	98% Cellulose	2% Non-fibrous (Other)	None Detected
AS-30-Wallboard 022108344-0030	Wallboard/ Joint Compound	Gray Fibrous Heterogeneous	5% Cellulose 1% Glass	94% Non-fibrous (Other)	None Detected
AS-30-Joint Compound 022108344-0030A	Wallboard/ Joint Compound	White Non-Fibrous Homogeneous		30% Ca Carbonate 70% Non-fibrous (Other)	None Detected
AS-31-Wallboard 022108344-0031	Wallboard/ Joint Compound	Gray Fibrous Heterogeneous	8% Cellulose <1% Glass	92% Non-fibrous (Other)	None Detected
AS-31-Joint Compound 022108344-0031A	Wallboard/ Joint Compound	White Non-Fibrous Homogeneous		30% Ca Carbonate 70% Non-fibrous (Other)	None Detected
AS-31-Tape 022108344-0031B	Wallboard/ Joint Compound	Tan Fibrous Homogeneous	98% Cellulose	2% Non-fibrous (Other)	None Detected
AS-32-Wallboard 022108344-0032	Wallboard/ Joint Compound	Gray Fibrous Heterogeneous	8% Cellulose <1% Glass	92% Non-fibrous (Other)	None Detected
AS-32-Joint Compound 022108344-0032A	Wallboard/ Joint Compound	White Non-Fibrous Homogeneous		30% Ca Carbonate 70% Non-fibrous (Other)	None Detected
AS-32-Tape 022108344-0032B	Wallboard/ Joint Compound	Tan Fibrous Homogeneous	98% Cellulose	2% Non-fibrous (Other)	None Detected
AS-33-Wallboard 022108344-0033	Wallboard/ Joint Compound	White Non-Fibrous Homogeneous	10% Cellulose	90% Non-fibrous (Other)	None Detected
AS-33-Joint Compound 022108344-0033A	Wallboard/ Joint Compound	White Non-Fibrous Homogeneous		20% Ca Carbonate 80% Non-fibrous (Other)	None Detected
AS-33-Tape 022108344-0033B	Wallboard/ Joint Compound	Beige Fibrous Homogeneous	98% Cellulose	2% Non-fibrous (Other)	None Detected

Initial report from: 11/19/2021 08:38:12



EMSL Analytical, Inc.

706 Gralin Street Kernersville, NC 27284

Tel/Fax: (336) 992-1025 / (336) 992-4175

<http://www.EMSL.com> / greensborolab@emsl.com

EMSL Order: 022108344

Customer ID: AMECTT25

Customer PO: 6228210243.02

Project ID:

Test Report: Asbestos Analysis of Bulk Materials via EPA 600/R-93/116 Method using Polarized Light Microscopy

Sample	Description	Appearance	Non-Asbestos		Asbestos
			% Fibrous	% Non-Fibrous	% Type
AS-33-Texture 022108344-0033C	Wallboard/ Joint Compound	White Non-Fibrous Homogeneous		20% Ca Carbonate 80% Non-fibrous (Other)	None Detected
AS-34-Wallboard 022108344-0034	Wallboard/ Joint Compound	White Non-Fibrous Homogeneous	5% Cellulose 3% Glass	92% Non-fibrous (Other)	None Detected
AS-34-Joint Compound 022108344-0034A	Wallboard/ Joint Compound	White Non-Fibrous Homogeneous		20% Ca Carbonate 80% Non-fibrous (Other)	None Detected
AS-34-Tape 022108344-0034B	Wallboard/ Joint Compound	Beige Fibrous Homogeneous	98% Cellulose	2% Non-fibrous (Other)	None Detected
AS-34-Texture 022108344-0034C	Wallboard/ Joint Compound	White Non-Fibrous Homogeneous		20% Ca Carbonate 80% Non-fibrous (Other)	None Detected
AS-35-Wallboard 022108344-0035	Wallboard/ Joint Compound	White Non-Fibrous Homogeneous	5% Cellulose 3% Glass	92% Non-fibrous (Other)	None Detected
AS-35-Joint Compound 022108344-0035A	Wallboard/ Joint Compound	White Non-Fibrous Homogeneous		20% Ca Carbonate 80% Non-fibrous (Other)	None Detected
AS-35-Tape 022108344-0035B	Wallboard/ Joint Compound	Beige Fibrous Homogeneous	98% Cellulose	2% Non-fibrous (Other)	None Detected
AS-36-Floor Tile 022108344-0036	Beige 12x12 FT/ Mastic	Tan Non-Fibrous Homogeneous		20% Quartz 80% Non-fibrous (Other)	None Detected
AS-36-Mastic 022108344-0036A	Beige 12x12 FT/ Mastic	Tan/Yellow Non-Fibrous Homogeneous	<1% Cellulose	100% Non-fibrous (Other)	None Detected
AS-37-Floor Tile 022108344-0037	Beige 12x12 FT/ Mastic	Tan Non-Fibrous Homogeneous		20% Quartz 80% Non-fibrous (Other)	None Detected
AS-37-Mastic 022108344-0037A	Beige 12x12 FT/ Mastic	Yellow Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
AS-37-Leveler 022108344-0037B	Beige 12x12 FT/ Mastic	Gray Non-Fibrous Homogeneous		10% Ca Carbonate 90% Non-fibrous (Other)	None Detected
AS-38-Cove Base 022108344-0038	Tan Covebase Molding/ Mastic	Tan Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
AS-38-Mastic 022108344-0038A	Tan Covebase Molding/ Mastic	Beige Non-Fibrous Homogeneous	<1% Cellulose	100% Non-fibrous (Other)	None Detected
AS-39-Cove Base 022108344-0039	Tan Covebase Molding/ Mastic	Brown Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
AS-39-Mastic 022108344-0039A	Tan Covebase Molding/ Mastic	White Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
AS-40-Cove Base 022108344-0040	Brown Covebase Molding/ Mastic	Brown Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
AS-40-Mastic 022108344-0040A	Brown Covebase Molding/ Mastic	Yellow Non-Fibrous Homogeneous	<1% Cellulose	100% Non-fibrous (Other)	None Detected

Initial report from: 11/19/2021 08:38:12



EMSL Analytical, Inc.

706 Gralin Street Kernersville, NC 27284

Tel/Fax: (336) 992-1025 / (336) 992-4175

<http://www.EMSL.com> / greensborolab@emsl.com

EMSL Order: 022108344

Customer ID: AMECTT25

Customer PO: 6228210243.02

Project ID:

Test Report: Asbestos Analysis of Bulk Materials via EPA 600/R-93/116 Method using Polarized Light Microscopy

Sample	Description	Appearance	Non-Asbestos		Asbestos
			% Fibrous	% Non-Fibrous	% Type
AS-41-Cove Base 022108344-0041	Brown Covebase Molding/ Mastic	Brown Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
AS-41-Mastic 022108344-0041A	Brown Covebase Molding/ Mastic	Yellow Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
AS-42 022108344-0042	2x4 Ceiling Tile	Gray/White Fibrous Homogeneous	50% Cellulose 10% Glass	25% Perlite 15% Non-fibrous (Other)	None Detected
AS-43 022108344-0043	2x4 Ceiling Tile	White/Beige Fibrous Homogeneous	60% Cellulose 5% Min. Wool	30% Perlite 5% Non-fibrous (Other)	None Detected
AS-44-Wallboard 022108344-0044	Wallboard/ Joint Compound	White Non-Fibrous Homogeneous	10% Cellulose 3% Glass	87% Non-fibrous (Other)	None Detected
AS-44-Joint Compound 022108344-0044A	Wallboard/ Joint Compound	White Non-Fibrous Homogeneous		20% Ca Carbonate 80% Non-fibrous (Other)	None Detected
AS-44-Tape 022108344-0044B	Wallboard/ Joint Compound	Beige Fibrous Homogeneous	99% Cellulose	1% Non-fibrous (Other)	None Detected
AS-44-Texture 022108344-0044C	Wallboard/ Joint Compound	White Non-Fibrous Homogeneous		20% Ca Carbonate 80% Non-fibrous (Other)	None Detected
AS-45-Wallboard 022108344-0045	Wallboard/ Joint Compound	White Non-Fibrous Homogeneous	10% Cellulose 3% Glass	87% Non-fibrous (Other)	None Detected
AS-45-Joint Compound 022108344-0045A	Wallboard/ Joint Compound	White Non-Fibrous Homogeneous		20% Ca Carbonate 80% Non-fibrous (Other)	None Detected
AS-45-Tape 022108344-0045B	Wallboard/ Joint Compound	Beige Fibrous Homogeneous	99% Cellulose	1% Non-fibrous (Other)	None Detected
AS-45-Texture 022108344-0045C	Wallboard/ Joint Compound	White Non-Fibrous Homogeneous		20% Ca Carbonate 80% Non-fibrous (Other)	None Detected
AS-46-Wallboard 022108344-0046	Wallboard/ Joint Compound	White Non-Fibrous Homogeneous	10% Cellulose 3% Glass	87% Non-fibrous (Other)	None Detected
AS-46-Joint Compound 022108344-0046A	Wallboard/ Joint Compound	White Non-Fibrous Homogeneous		20% Ca Carbonate 80% Non-fibrous (Other)	None Detected
AS-46-Tape 022108344-0046B	Wallboard/ Joint Compound	Beige Fibrous Homogeneous	99% Cellulose	1% Non-fibrous (Other)	None Detected
AS-46-Texture 022108344-0046C	Wallboard/ Joint Compound	White Non-Fibrous Homogeneous		20% Ca Carbonate 80% Non-fibrous (Other)	None Detected
AS-47-Wallboard 022108344-0047 Joint Compound not present	Wallboard/ Joint Compound	Gray Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
AS-47-Texture 022108344-0047A	Wallboard/ Joint Compound	White Non-Fibrous Homogeneous		20% Ca Carbonate 80% Non-fibrous (Other)	None Detected

Initial report from: 11/19/2021 08:38:12



EMSL Analytical, Inc.

706 Gralin Street Kernersville, NC 27284

Tel/Fax: (336) 992-1025 / (336) 992-4175

<http://www.EMSL.com> / greensborolab@emsl.com

EMSL Order: 022108344

Customer ID: AMECTT25

Customer PO: 6228210243.02

Project ID:

Test Report: Asbestos Analysis of Bulk Materials via EPA 600/R-93/116 Method using Polarized Light Microscopy

Sample	Description	Appearance	Non-Asbestos		Asbestos
			% Fibrous	% Non-Fibrous	% Type
AS-48-Wallboard 022108344-0048	Wallboard/ Joint Compound	Brown/White Fibrous Heterogeneous	8% Cellulose	92% Non-fibrous (Other)	None Detected
AS-48-Texture 022108344-0048A	Wallboard/ Joint Compound	White Non-Fibrous Homogeneous		25% Ca Carbonate 75% Non-fibrous (Other)	None Detected
AS-49-Wallboard 022108344-0049	Wallboard/ Joint Compound	Brown/White Fibrous Heterogeneous	8% Cellulose	92% Non-fibrous (Other)	None Detected
AS-49-Joint Compound 022108344-0049A	Wallboard/ Joint Compound	White Non-Fibrous Homogeneous		25% Ca Carbonate 75% Non-fibrous (Other)	None Detected
AS-49-Tape 022108344-0049B	Wallboard/ Joint Compound	Beige Fibrous Homogeneous	99% Cellulose	1% Non-fibrous (Other)	None Detected
AS-49-Texture 022108344-0049C	Wallboard/ Joint Compound	White Non-Fibrous Homogeneous		25% Ca Carbonate 75% Non-fibrous (Other)	None Detected
AS-50-Wallboard 022108344-0050	Wallboard/ Joint Compound	Brown/White Fibrous Heterogeneous	8% Cellulose	92% Non-fibrous (Other)	None Detected
AS-50-Joint Compound 022108344-0050A	Wallboard/ Joint Compound	White Non-Fibrous Homogeneous		25% Ca Carbonate 75% Non-fibrous (Other)	None Detected
AS-50-Tape 022108344-0050B	Wallboard/ Joint Compound	Beige Fibrous Homogeneous	99% Cellulose	1% Non-fibrous (Other)	None Detected
AS-50-Texture 022108344-0050C	Wallboard/ Joint Compound	White Non-Fibrous Homogeneous		25% Ca Carbonate 75% Non-fibrous (Other)	None Detected
AS-51 022108344-0051	Asphaltic Roof Layer	Gray/Black Non-Fibrous Homogeneous		92% Non-fibrous (Other)	8% Chrysotile
AS-52 022108344-0052	Asphaltic Roof Layer				Positive Stop (Not Analyzed)
AS-53 022108344-0053	Pipe TSI	Tan Fibrous Homogeneous	5% Synthetic 5% Glass	90% Non-fibrous (Other)	None Detected
AS-54 022108344-0054	Pipe TSI	Tan Fibrous Homogeneous	5% Synthetic 5% Glass	90% Non-fibrous (Other)	None Detected
AS-55 022108344-0055	Pipe TSI	Peach Fibrous Heterogeneous	6% Synthetic 3% Glass	20% Ca Carbonate 71% Non-fibrous (Other)	None Detected
AS-56 022108344-0056	Pipe TSI	Beige Non-Fibrous Homogeneous	8% Cellulose	92% Non-fibrous (Other)	None Detected
AS-57 022108344-0057	Pipe TSI	Beige Non-Fibrous Homogeneous	3% Cellulose	97% Non-fibrous (Other)	None Detected
AS-58 022108344-0058	Pipe TSI	Beige Non-Fibrous Homogeneous	3% Cellulose	20% Ca Carbonate 77% Non-fibrous (Other)	None Detected
AS-59 022108344-0059	Tank Insulation- Top	Blue Fibrous Homogeneous	10% Synthetic 5% Glass	85% Non-fibrous (Other)	None Detected

Initial report from: 11/19/2021 08:38:12



EMSL Analytical, Inc.

706 Gralin Street Kernersville, NC 27284

Tel/Fax: (336) 992-1025 / (336) 992-4175

<http://www.EMSL.com> / greensborolab@emsl.com

EMSL Order: 022108344

Customer ID: AMECTT25

Customer PO: 6228210243.02

Project ID:

Test Report: Asbestos Analysis of Bulk Materials via EPA 600/R-93/116 Method using Polarized Light Microscopy

Sample	Description	Appearance	Non-Asbestos		Asbestos
			% Fibrous	% Non-Fibrous	% Type
AS-60	Tank Insulation- Top	Blue Fibrous Homogeneous	10% Synthetic 5% Glass	85% Non-fibrous (Other)	None Detected
022108344-0060					
AS-61	Tank Insulation- Top	Blue Fibrous Homogeneous	10% Synthetic	20% Ca Carbonate 70% Non-fibrous (Other)	None Detected
022108344-0061					

Analyst(s)

Bobby Wheatley (13)

Cameron Evans (24)

Jurnee West (47)

Ryan Rains (27)

Stephen Bennett, Laboratory Manager
or Other Approved Signatory

EMSL maintains liability limited to cost of analysis. Interpretation and use of test results are the responsibility of the client. This report relates only to the samples reported above, and may not be reproduced, except in full, without written approval by EMSL. EMSL bears no responsibility for sample collection activities or analytical method limitations. The report reflects the samples as received. Results are generated from the field sampling data (sampling volumes and areas, locations, etc.) provided by the client on the Chain of Custody. Samples are within quality control criteria and met method specifications unless otherwise noted. The above analyses were performed in general compliance with Appendix E to Subpart E of 40 CFR (previously EPA 600/M4-82-020 "Interim Method") but augmented with procedures outlined in the 1993 ("final") version of the method. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST or any agency of the federal government. Non-friable organically bound materials present a problem matrix and therefore EMSL recommends gravimetric reduction prior to analysis. Unless requested by the client, building materials manufactured with multiple layers (i.e. linoleum, wallboard, etc.) are reported as a single sample. Estimation of uncertainty is available on request.

Samples analyzed by EMSL Analytical, Inc. Kernersville, NC NVLAP Lab Code 102104-0, Virginia 3333-000228, West Virginia LT000321

Initial report from: 11/19/2021 08:38:12



EMSL ANALYTICAL, INC.
LABORATORY • PRODUCTS • TRAINING

Asbestos Bulk Building Materials - Chain of Custody

706 Gralin Street

EMSL Order Number / Lab Use Only

Kernersville, NC 27284

Phone: (336) 992-1025

Email: greensborolab@emsl.com

8344

Customer Information	Customer ID:		Billing Information	Billing ID:	
	Company Name:	Wood E&I		Company Name:	Wood E&I
	Contact Name:	Shaun Rankin		Billing Contact:	Shaun Rankin
	Street Address:	104 Corporate Boulevard, Suite 407		Street Address:	104 Corporate Boulevard, Suite 407
	City, State, Zip:	West Columbia SC 29169 Country: US		City, State, Zip:	West Columbia SC Country: US
	Phone:	8037981200		Phone:	8037981200
	Email(s) for Report:	shaun.rankin@woodplc.com		Email(s) for Invoice:	

Project Name/No: 6228210243.02		Purchase Order: 6228210243.02
EMSL LIMS Project ID (If applicable, EMSL will provide)	US State where samples collected: NC	State of Connecticut (CT) must select project location: <input type="checkbox"/> Commercial (Taxable) <input type="checkbox"/> Residential (Non-Taxable)
Sampled By Name: Shaun Rankin	Sampled By Signature: <i>[Signature]</i>	Date Sampled: 11/12/2021 No. of Samples in Shipment: 61

Turn-Around-Time (TAT)

☐ 3 Hour
 ☐ 6 Hour
 ☐ 24 Hour
 ☐ 32 Hour
 ☐ 48 Hour
 ☒ 72 Hour
 ☐ 96 Hour
 ☐ 1 Week
 ☐ 2 Week

Please call ahead for large projects and/or turnaround times 6 Hours or Less. 72 Hour TAT available for select tests only. Samples must be submitted by 11:30am.

<p>PLM - Bulk (reporting limit)</p> <p><input checked="" type="checkbox"/> PLM EPA 600/R-93/116 (<1%)</p> <p><input type="checkbox"/> PLM EPA NOB (<1%)</p> <p><input type="checkbox"/> POINT COUNT</p> <p><input type="checkbox"/> 400 (<0.25%) <input type="checkbox"/> 1,000 (<0.1%)</p> <p><input type="checkbox"/> POINT COUNT w/ GRAVIMETRIC</p> <p><input type="checkbox"/> 400 (<0.25%) <input type="checkbox"/> 1,000 (<0.1%)</p> <p><input type="checkbox"/> NIOSH 9002 (<1%)</p> <p><input type="checkbox"/> NYS 198.1 (Friable - NY)</p> <p><input type="checkbox"/> NYS 198.6 NOB (Non-Friable - NY)</p> <p><input type="checkbox"/> NYS 198.8 (Vermiculite SM-V)</p>	<p>Test Selection</p> <p>TEM - Bulk</p> <p><input type="checkbox"/> TEM EPA NOB</p> <p><input type="checkbox"/> NYS NOB 198.4 (Non-Friable - NY)</p> <p><input type="checkbox"/> TEM EPA 600/R-93/116 w Milling Prep (0.1%)</p> <p>Other Tests (please specify)</p> <p><input checked="" type="checkbox"/> Positive Stop - Clearly Identified Homogeneous Areas (HA)</p>
--	---

Sample Number	HA Number	Sample Location	Material Description
AS-1	1	Admin Roof	White Patch Caulk
AS-2	1	Admin Roof	White Patch Caulk
AS-3	2	Admin Roof	Black Flashing
AS-4	2	Admin Roof	Black Flashing
AS-5	3	Admin Roof	Grey Caulk
AS-6	3	Admin Roof	Grey Caulk
AS-7	4	Admin Roof	Black Flashing AHU
AS-8	4	Admin Roof	Black Flashing AHU
AS-9	5	Annex Roof	Blue/Green Patch Caulk
AS-10	5	Annex Roof	Blue/Green Patch Caulk

Special Instructions and/or Regulatory Requirements (Sample Specifications, Processing Methods, Limits of Detection, etc.)

Method of Shipment: <i>FEDEX AIRBILL # 796261523957</i> Relinquished by: <i>[Signature]</i> Date/Time: 11/15/21 1630	Sample Condition Upon Receipt: Received by: <i>NS</i> Date/Time: 11/16/21 9:45
--	--

Controlled Document - Asbestos Bulk R7 9/14/2021

☐ AGREE TO ELECTRONIC SIGNATURE (By checking, I consent to signing this Chain of Custody document by electronic signature.)

EMSL Analytical, Inc.'s Laboratory Terms and Conditions are incorporated into this Chain of Custody by reference in their entirety. Submission of samples to EMSL Analytical, Inc. constitutes acceptance and acknowledgment of all terms and conditions by Customer.



EMSL ANALYTICAL, INC.
LABORATORY • PRODUCTS • TRAINING

Asbestos Bulk Building Materials - Chain of Custody

EMSL Order Number - Lab Use Only

EMSL Analytical, Inc

706 Gralin Street

Kernersville, NC 27284

Phone: (336) 992-1025

Email: greensborolab@emsl.com

8344

Additional Pages of the Chain of Custody are only necessary if needed for additional sample information

Special Instructions and/or Regulatory Requirements (Sample Specifications, Processing Methods, Limits of Detection, etc.)

Sample Number	HA Number	Sample Location	Material Description
AS-11	6	Guard House	Tan Sheet Vinyl
AS-12	6	Guard House	Tan Sheet Vinyl
AS-13	7	Guard House	White Window Caulk
AS-14	7	Guard House	White Window Caulk
AS-15	8	Guard House	Brown Covebase Molding/Mastic
AS-16	8	Guard House	Brown Covebase Molding/Mastic
AS-17	9	Guard House	Asphalt Shingle
AS-18	9	Guard House	Asphalt Shingle
AS-19	10	Admin Building	Grey w/ White Steaks 12x12 FT/mastic
AS-20	10	Admin Building	Grey w/ White Steaks 12x12 FT/mastic
AS-21	11	Admin Building	Tan Covebase Molding/Mastic
AS-22	11	Admin Building	Tan Covebase Molding/Mastic
AS-23	12	Admin Building	2x4 Ceiling Tile
AS-24	12	Admin Building	2x4 Ceiling Tile
AS-25	13	Admin Building	Tan w/ White Steaks 12x12 FT/mastic
AS-26	13	Admin Building	Tan w/ White Steaks 12x12 FT/mastic
AS-27	14	Admin Building	White w/ Grey Steaks 12x12 FT/mastic
AS-28	14	Admin Building	White w/ Grey Steaks 12x12 FT/mastic
AS-29	15	Admin Building	Wallboard/Joint Compound
AS-30	15	Admin Building	Wallboard/Joint Compound
AS-31	15	Admin Building	Wallboard/Joint Compound
AS-32	15	Admin Building	Wallboard/Joint Compound
AS-33	15	Admin Building	Wallboard/Joint Compound
AS-34	15	Admin Building	Wallboard/Joint Compound
AS-35	15	Admin Building	Wallboard/Joint Compound

Method of Shipment:

Sample Condition Upon Receipt:

Relinquished by:

Date/Time:

Received by:

Date/Time

Relinquished by:

Date/Time:

Received by:

Date/Time

Controlled Document - Asbestos Bulk R7 09/14/2021



AGREE TO ELECTRONIC SIGNATURE (By checking I consent to signing this Chain of Custody document by electronic signature.)

EMSL Analytical, Inc.'s Laboratory Terms and Conditions are incorporated into this Chain of Custody by reference in their entirety. Submission of samples to EMSL Analytical, Inc. constitutes acceptance and acknowledgment of all terms and conditions by Customer.



Asbestos Bulk Building Materials - Chain of Custody

EMSL Order Number - Lab Use Only

EMSL Analytical, Inc

706 Galin Street

Kernersville, NC 27284

(336) 992-1025

greensborolab@emsl.com

EMSL ANALYTICAL, INC.
LABORATORY • PRODUCTS • TRAINING

8344

Additional Pages of the Chain of Custody are only necessary if needed for additional sample information

Special Instructions and/or Regulatory Requirements (Sample Specifications, Processing Methods, Limits of Detection, etc.)

Sample Number	HA Number	Sample Location	Material Description
AS-36	16	Annex Building	Beige 12x12 FT/mastic
AS-37	16	Guard House	Beige 12x12 FT/mastic
AS-38	17	Guard House	Tan Covebase Molding/Mastic
AS-39	17	Guard House	Tan Covebase Molding/Mastic
AS-40	18	Guard House	Brown Covebase Molding/Mastic
AS-41	18	Guard House	Brown Covebase Molding/Mastic
AS-42	19	Guard House	2x4 Ceiling Tile
AS-43	19	Guard House	2x4 Ceiling Tile
AS-44	20	Admin Building	Wallboard/Joint Compound
AS-45	20	Admin Building	Wallboard/Joint Compound
AS-46	20	Admin Building	Wallboard/Joint Compound
AS-47	20	Admin Building	Wallboard/Joint Compound
AS-48	20	Admin Building	Wallboard/Joint Compound
AS-49	20	Admin Building	Wallboard/Joint Compound
AS-50	20	Admin Building	Wallboard/Joint Compound
AS-51	21	Pump House Roof	Asphaltic Roof Layer
AS-52	21	Pump House Roof	Asphaltic Roof Layer
AS-53	22	NE Building	Pipe TSI
AS-54	22	NE Building	Pipe TSI
AS-55	22	NE Building	Pipe TSI
AS-56	23	Wastewater System RBC Area	Pipe TSI
AS-57	23	Wastewater System RBC Area	Pipe TSI
AS-58	23	Wastewater System RBC Area	Pipe TSI
AS-59	24	Tank Farm	Tank Insulation - Top
AS-60	24	Tank Farm	Tank Insulation - Top

Method of Shipment:

Sample Condition Upon Receipt:

Relinquished by:

Date/Time

Received by:

Date/Time

Relinquished by:

Date/Time

Received by:

Date/Time

Controlled Document - Asbestos Bulk R7 09/14/2021



AGREE TO ELECTRONIC SIGNATURE (By checking, I consent to signing this Chain of Custody document by electronic signature.)

EMSL Analytical, Inc.'s Laboratory Terms and Conditions are incorporated into this Chain of Custody by reference in their entirety. Submission of samples to EMSL Analytical, Inc. constitutes acceptance and acknowledgment of all terms and conditions by Customer.



EMSL ANALYTICAL, INC.
LABORATORY • PRODUCTS • TRAINING

Asbestos Bulk Building Materials - Chain of Custody

EMSL Order Number / Lab Use Only

EMSL Analytical, Inc.

706 Gralin Street

Kernersville, NC 27284

(336) 992-1025

greensborolab@emsl.com

Additional Pages of the Chain of Custody are only necessary if needed for additional sample information

Special Instructions and/or Regulatory Requirements (Sample Specifications, Processing Methods, Limits of Detection, etc)

[illegible]

Method of Shipment:

Sample Condition Upon Receipt:

Relinquished by:

SEE PAGE 1

Date/Time.

Received by:

Date/Time

Relinquished by:

Date/Time

Received by:

Date/Time

Controlled Document - Asbestos Bulk R7 09/14/2021

☐ **AGREE TO ELECTRONIC SIGNATURE** (By checking, I consent to signing this Chain of Custody document by electronic signature.)

EMSL Analytical, Inc.'s Laboratory Terms and Conditions are incorporated into this Chain of Custody by reference in their entirety. Submission of samples to EMSL Analytical, Inc. constitutes acceptance and acknowledgment of all terms and conditions by Customer.

APPENDIX C

LABORATORY RESULTS OF PAINT CHIP SAMPLES

**EMSL Analytical, Inc.**

706 Gralin Street, Kernersville, NC 27284

Phone/Fax: (336) 992-1025 / (336) 992-4175

<http://www.EMSL.com>greensborolab@emsl.com

EMSL Order: 022108349
CustomerID: AMECTT25
CustomerPO: 6228210243.02
ProjectID:

Attn: **Shaun Rankin**
Wood Env. & Infrastructure Solutions
104 Corporate Boulevard, Suite 407
West Columbia, SC 29169

Phone: (803) 798-1200
Fax: (803) 750-1303
Received: 11/16/2021 09:45 AM
Collected: 11/11/2021

Project: **6228210243.02****Test Report: Lead in Paint Chips by Flame AAS (SW 846 3050B/7000B)***

<i>Client Sample Description</i>	<i>Lab ID</i>	<i>Collected</i>	<i>Analyzed</i>	<i>Weight</i>	<i>Lead Concentration</i>
P-1	022108349-0001	11/11/2021	11/17/2021	.2611 g	0.023 % wt
P-2	022108349-0002	11/11/2021	11/17/2021	.291 g	<0.0080 % wt
P-3	022108349-0003	11/11/2021	11/17/2021	.2877 g	<0.0080 % wt
P-4	022108349-0004	11/11/2021	11/17/2021	.2881 g	<0.0080 % wt
P-5	022108349-0005	11/11/2021	11/17/2021	.2937 g	<0.0080 % wt
P-6	022108349-0006	11/11/2021	11/17/2021	.2507 g	0.16 % wt
P-7	022108349-0007	11/11/2021	11/17/2021	.2528 g	<0.0080 % wt
P-8	022108349-0008	11/11/2021	11/17/2021	.2735 g	<0.0080 % wt
P-9	022108349-0009	11/11/2021	11/17/2021	.2534 g	0.76 % wt
P-10	022108349-0010	11/11/2021	11/17/2021	.2512 g	0.045 % wt
P-11	022108349-0011	11/11/2021	11/17/2021	.2879 g	0.23 % wt
P-12	022108349-0012	11/11/2021	11/17/2021	.2805 g	<0.0080 % wt
P-13	022108349-0013	11/11/2021	11/17/2021	.266 g	<0.0080 % wt

James Cole, Laboratory Manager
or other approved signatory

EMSL maintains liability limited to cost of analysis. Interpretation and use of test results are the responsibility of the client. This report relates only to the samples reported above, and may not be reproduced, except in full, without written approval by EMSL. EMSL bears no responsibility for sample collection activities or analytical method limitations. The report reflects the samples as received. Results are generated from the field sampling data (sampling volumes and areas, locations, etc.) provided by the client on the Chain of Custody. Samples are within quality control criteria and met method specifications unless otherwise noted.

Analysis following Lead in Paint by EMSL SOP/Determination of Environmental Lead by FLAA. Reporting limit is 0.008% wt based on the minimum sample weight per our SOP. "<" (less than) result signifies the analyte was not detected at or above the reporting limit. Measurement of uncertainty is available upon request. Definitions of modifications are available upon request.

Samples analyzed by EMSL Analytical, Inc. Kernersville, NC EMSL Lab ID 102564 is accredited by the AIHA Laboratory Accreditation Program (AIHA-LAP), LLC in the Environmental Lead accreditation program for Lead in Paint Chips.

Initial report from 11/19/2021 08:04:55



Lead Chain of Custody

EMSL Order Number / Lab Use Only

EMSL Analytical, Inc.

706 Gralin Street

Kernersville, NC 27284

(336) 992-1025

greensborolab@emsl.com

EMSL ANALYTICAL, INC.
LABORATORY PRODUCTS TRAINING

8349

Customer Information	Customer ID:	Billing ID:
	Company Name: Wood E&I	Company Name: Wood E&I
	Contact Name: Shaun Rankin	Billing Contact: Shaun Rankin
	Street Address: 104 Corporate Boulevard, Suite 407	Street Address: 104 Corporate Boulevard, Suite 407
	City, State, Zip: West Columbia SC 29169 Country: US	City, State, Zip: West Columbia SC 29169 Country: US
	Phone: 8037981200	Phone: 8037981200
Email(s) for Report: shaun.rankin@woodplc.com		Email(s) for Invoice:

Project Information

Project Name/No: 6228210243.02	Purchase Order: 6228210243.02
EMSL LIMS Project ID: (If applicable, EMSL will provide)	US State where samples collected: NC
State of Connecticut (CT) must select project location:	
Commercial (Taxable)	Residential (Non-Taxable)
Sampled By Name: Shaun Rankin	Sampled By Signature: <i>[Signature]</i>
No. of Samples in Shipment: 13	

Turn-Around-Time (TAT)

☐ 3 Hour
 ☐ 6 Hour
 ☐ 24 Hour
 ☐ 32 Hour
 ☐ 48 Hour
 ☒ 72 Hour
 ☐ 96 Hour
 ☐ 1 Week
 ☐ 2 Week

Please call ahead for large projects and/or turnaround times 5 hours or less. *32 Hour TAT available for select tests only; samples must be submitted by 11:30am

MATRIX	METHOD	INSTRUMENT	REPORTING LIMIT	SELECTION
CHIPS <input checked="" type="checkbox"/> % by wt. <input type="checkbox"/> ppm (mg/kg) <input type="checkbox"/> mg/cm ²	SW 846-7000B	Flame Atomic Absorption	0.008% (80ppm)	<input checked="" type="checkbox"/>
Reporting Limit based on a minimum 0.25g sample weight	SW 846-6010D	ICP-OES	0.0004% (4ppm)	<input type="checkbox"/>
	NIOSH 7082	Flame Atomic Absorption	4µg/filter	<input type="checkbox"/>
AIR	NIOSH 7300M / NIOSH 7303M	ICP-OES	0.5µg/filter	<input type="checkbox"/>
	NIOSH 7300M / NIOSH 7303M	ICP-MS	0.05µg/filter	<input type="checkbox"/>
WIPE <input type="checkbox"/> ASTM <input type="checkbox"/> NON-ASTM	SW 846-7000B	Flame Atomic Absorption	10µg/wipe	<input type="checkbox"/>
If no box is checked, non-ASTM Wipe is assumed	SW 846-6010D	ICP-OES	1.0µg/wipe	<input type="checkbox"/>
TCLP	SW 846-1311 / 7000B / SM 3111B	Flame Atomic Absorption	0.4 mg/L (ppm)	<input type="checkbox"/>
	SW 846-1311 / SW 846-6010D*	ICP-OES	0.1 mg/L (ppm)	<input type="checkbox"/>
SPLP	SW 846-1312 / 7000B / SM 3111B	Flame Atomic Absorption	0.4 mg/L (ppm)	<input type="checkbox"/>
	SW 846-1312 / SW 846-6010D*	ICP-OES	0.1 mg/L (ppm)	<input type="checkbox"/>
TTLIC	22 CCR App. II, 7000B	Flame Atomic Absorption	40mg/kg (ppm)	<input type="checkbox"/>
	22 CCR App. II, SW 846-6010D*	ICP-OES	2mg/kg (ppm)	<input type="checkbox"/>
STLC	22 CCR App. II, 7000B	Flame Atomic Absorption	0.4 mg/L (ppm)	<input type="checkbox"/>
	22 CCR App. II, SW 846-6010D*	ICP-OES	0.1 mg/L (ppm)	<input type="checkbox"/>
Soil	SW 846-7000B	Flame Atomic Absorption	40mg/kg (ppm)	<input type="checkbox"/>
	SW 846-6010D*	ICP-OES	2mg/kg (ppm)	<input type="checkbox"/>
Wastewater	SM 3111B / SW 846-7000B	Flame Atomic Absorption	0.4 mg/L (ppm)	<input type="checkbox"/>
Unpreserved <input type="checkbox"/>	EPA 200.7	ICP-OES	0.020 mg/L (ppm)	<input type="checkbox"/>
Preserved with HNO ₃ <input type="checkbox"/> PH<2	EPA 200.5	ICP-OES	0.003 mg/L (ppm)	<input type="checkbox"/>
Drinking Water	EPA 200.8	ICP-MS	0.001 mg/L (ppm)	<input type="checkbox"/>
Unpreserved <input type="checkbox"/>	40 CFR Part 50	ICP-OES	12 µg/filter	<input type="checkbox"/>
Preserved with HNO ₃ <input type="checkbox"/> PH<2				<input type="checkbox"/>
TSP/SPM Filter				<input type="checkbox"/>
Other <input type="checkbox"/>				<input type="checkbox"/>

Sample Number	Sample Location	Volume / Area	Date / Time Sampled
P-1	Walkway Oxidation System #1 - Tan		11/11/2021
P-2	Walkway Oxidation System #2 - White		11/11/2021
P-3	RBC Tank 1 - White		11/11/2021
P-4	Settling Basin Walkway - Grey		11/11/2021
P-5	Fire Water Pump - Red		11/11/2021

Method of Shipment: <i>2 EMSL FedEx (Airbill # 796261523957)</i>	Sample Condition Upon Receipt:
Relinquished by: <i>[Signature]</i>	Received by: <i>[Signature]</i>
Date/Time: 11/15/21 1630	Date/Time: 11/16/21 9:45
Relinquished by:	Received by:
Date/Time:	Date/Time:

Controlled Document - CQC-25 Lead R16 4/19/2021

*6010C Available Upon Request

☐ AGREE TO ELECTRONIC SIGNATURE (By checking, I consent to signing this Chain of Custody document by electronic signature.)

EMSL Analytical, Inc.'s Laboratory Terms and Conditions are incorporated into this Chain of Custody by reference in their entirety. Submission of samples to EMSL Analytical, Inc. constitutes acceptance and acknowledgment of all terms and conditions by Customer

8349

Special Instructions and/or Regulatory Requirements (Sample Specifications, Processing Methods, Limits of Detection, etc.)

[illegible]

LUMP SUM/UNIT RATE PROPOSAL
SECTION III GENERAL REQUIREMENTS

Specification No. 02 Decommissioning and Demolition Requirements

1 PRE-CONSTRUCTION WORK

1.1 KICKOFF MEETING

- 1.1.1 The Pender County Construction Representative (*Construction Manager*) will schedule a pre-construction kickoff meeting at the site or other convenient location before Work starts.
- 1.1.2 The meeting will provide an overview of the following project requirements:
 - 1.1.2.1 Project Scope, Schedule, Invoicing Procedure, CCO Procedure, Contractor Submittals, Working in Operating Facilities, Site Access and Security, Health and Safety, Temporary Facilities, Coordination of Work, Permit Requirements, Materials Management, QA/QC, Managing Waste.

2 MOBILIZATION & SITE PREPARATION

2.1 MOBILIZATION

- 2.1.1 Provide and setup field office(s), office supplies, sanitary facilities, change trailers, First Aid and PPE supplies, temporary power, small tools and equipment.
- 2.1.2 Coordinate with Pender County Construction Manager (Wood) the following mobilization activities:
 - 2.1.2.1 Location of field offices, sanitary facilities, lay-down areas and temporary storage facilities.
 - 2.1.2.2 The agreed to location for construction field offices, storage, site access, parking and employee entry to Facility shall be as identified in the Construction Documents and will be reaffirmed at the kickoff meeting.

3 CONSTRUCTION WORK

3.1 GENERAL

- 3.1.1 When minimum requirements for projects having minor site, mechanical or electrical scope and where more detailed technical specifications are not provided. For more complex construction work and when detailed technical specifications are provided, refer to the Technical Specifications of the Contract. If there is a conflict between these general requirements and the technical specifications, the technical specifications shall govern.

3.2 CIVIL WORK

3.2.1 Storm Water Management, Soil Erosion and Sedimentation Control

- 3.2.1.1 When required by the Specification 01, Summary of Work or the Technical Specifications of the RFP, provide necessary Storm Water, Erosion Control, and Sedimentation Control Plan and measures.

3.2.1.2 Storm Water Management, Soil Erosion and Sedimentation Control Plan

1. Implement and Adhere to the requirements of the Soil Erosion and Sedimentation Control Plan that is part of this RFP for construction.
2. Maintain copy of this plan at the site
3. At a minimum, the plan shall include:
 - Chronological completion dates for each temporary (and permanent) measure for controlling stormwater, erosion and sediment.
 - Location, type and purpose for each temporary measure to be undertaken.
 - Dates when those temporary measures will be removed.
 - Materials and equipment to be used.

3.2.1.3 Soil Erosion Control and Sedimentation Control Requirements:

1. Install erosion and sedimentation control measures in accordance with the attached Erosion and Sedimentation Control Plan prior to all construction activities.
2. Maintain control measures during earthwork activities.
3. Keep land disturbance to a minimum and schedule re-stabilization immediately after any disturbance, as is practicable.
4. Repair any failed control measure immediately. Perform maintenance as needed.
5. Remove all sedimentation and erosion control barriers after completion of construction and permanent control measures are installed.
6. Conform to all State, County and Local erosion and sedimentation control measures and as specified in the Soil Erosion, and Sedimentation Control Plan.
7. Immediately adjust or institute additional control measures if planned control measures are not effective or satisfactory to the regulatory agencies having jurisdiction.

3.2.1.4 Soil Erosion Control Measures: Measures shall include temporary berms,

diversions or other barriers including hay or straw bales, stone, silt fences or other agreed to materials that are constructed to retain sediment on-site by retarding and filtering storm runoff and prevent migration of silts and sediment to receiving waters.

1. Anchor all topsoil stockpiles with straw mulch and encircle with hay bales.
2. Silt fences or hay bales shall be installed at the toe of all critical cut and fill slopes.
3. Grade surfaces per the Contract Documents and manufacturer guidelines, prior to installation of erosion control fabric.
4. Diversion terraces shall be installed on the uphill side of disturbed areas to divert surface runoff away from unstable slopes and the project area, as may be required.
5. Interceptor channels shall be used across disturbed areas where the slope is running parallel to direction of trenches to divert runoff to outlets on lower side of disturbed area and shall be arranged to minimize erosion impact, as may be required.
6. Trench barriers of earth-filled sacks or piled stone, stacked to top of trench shall be constructed to prevent trench washout after installation of piping, if backfill operations are delayed, as may be required. Trench shall be sloped in the

direction of piping.

3.2.1.5 Sediment Control Measures

1. Periodically remove sediment from temporary control structures and permanent drainage facilities as needed.
2. Dispose of sediment per the Contract Documents. Prevent additional erosion or pollution.

3.2.2 Earthwork

3.2.2.1 Conduct all earthwork activities to mitigate dispersion of volatile organic emissions and fugitive dust beyond the Work Area.

3.2.2.2 Comply with all requirements of the Soil Erosion and Sedimentation Control Plan for the duration specified in the Plan.

3.3 MECHANICAL WORK

3.3.1 Equipment

3.3.1.1 Installation of Machinery and materials

1. Use certified shop drawings, installation drawings and manufacturer instructions when installing Machinery.
2. Mechanics shall be competent, experienced and skilled in handling, setting, aligning, leveling and adjusting the Products and shall install Products in accordance with manufacturer recommendations.
3. Use proper tools, equipment and materials to rig and assemble Products to prevent deforming or marring the surface of shafts, drive components, mating surfaces, threaded parts, etc.
4. Do not force or drive couplings, gears, sheaves, etc. on machinery shafts nor subject them to an open flame or torch. Use only oil bath heater or similar method.
5. Products shall not be altered or repaired, and no burning or welding will be permitted on any parts having machined surfaces, except by written permission of Pender County.
6. No rigging shall be done from any structure without the permission of Pender County.

3.3.1.2 Alignment & Leveling of Equipment

1. Equipment shall be carefully set and aligned on foundations to proper orientation and elevation and shimmed to true level.
2. Equipment baseframe shall be tightened to bear against shims.
3. Equipment shall be checked after securing to foundations and, after confirmation of level and elevation, shall be grouted in place.
4. Rotating equipment shall be initially aligned using stainless steel shims while equipment is free from any external loads.
5. Correctly align piping to associated equipment to prevent stress at pipe connections. Springing of pipe to align with mating equipment flanges is not permitted.
6. Misaligned holes shall be reamed. "Driving" of fasteners or keys is not permitted.
7. Check rotating equipment angular and parallel alignment and adjust to

manufacturer's specifications before testing or placing any Machinery into service.

4 SITE RESTORATION & DEMOBILIZATION

4.1 SITE RESTORATION

4.1.1 Complete site restoration in accordance with the Technical Specifications of the RFP. If not specifically specified, restore to current (or better) conditions.

4.2 DEMOBILIZATION

4.2.1 Submit an inventory listing all surplus materials.

4.2.2 Unless otherwise directed by Pender County (*or Wood*), remove all Temporary Work, tools and equipment at Work completion.

4.2.3 Properly decontaminate all tools and equipment before removal from site.

4.2.4 Properly decontaminate all supplies and materials before removal from site, or manage as waste materials in accordance with the requirements of this specification.

4.2.5 Remove all Temporary Facilities at the conclusion of the project.

5 CONTRACT CLOSEOUT

5.1 CLOSEOUT PROCEDURE

5.1.1 Notify Pender County and Facility Operations (*and AP*) when Work is Substantially Complete.

5.1.1.1 Project Summary highlighting project objectives were achieved

5.1.1.2 Health and Safety Closeout Documentation

5.1.1.3 Off-site disposal Record

5.1.1.4 Project Photographs

5.1.1.5 An assessment of the project schedule and cost variance

5.1.2 Rectify all Punch List items.

5.1.2.1 Submit detailed written resolution for each Punch List item.

5.1.3 Submit to Pender County and Wood written certification of Substantial Completion that addresses the following:

5.1.3.1 Contract Documents reviewed and updated or markups provided.

5.1.3.2 Work is complete, inspected and in accordance with Contract Documents.

5.1.3.3 Work is ready for Pender County and Wood Final inspection.

5.1.4 Accompany Pender County and Facility Operations and Wood on Final inspection and verify all Punch List items have been rectified to Pender County's and Wood's satisfaction.

5.1.5 Repeat Punch List and final inspection processes until there are no items to be addressed.

5.2 SURPLUS MATERIAL

5.2.1 Upon completion of the project, inventory surplus materials.

5.2.2 Surplus materials purchased by contractor via Lump Sum contract remains the property of the contractor and must be removed from the site.



Wood Environment & Infrastructure Solutions, Inc.
5710 Oleander Dr. Suite 110
Wilmington, North Carolina, 28403
T: 910-452-1185
www.woodplc.com

**REPORT OF
REGULATED MATERIALS SURVEY
FORMER BROWNFIELDS PROPERTY
HIGHWAY 421 PENDER COUNTY
WILMINGTON, NORTH CAROLINA**

Prepared for:

Pender County

Prepared by:

Wood Environment & Infrastructure Solutions, Inc.
5710 Oleander Drive, Suite 110
Wilmington, North Carolina

December 2021

Wood Environment & Infrastructure Solutions, Inc.
5710 Oleander Drive, Suite 110
Wilmington, NC 28403
Licensure: NC Engineering F-1253; NC Geology C-247

Tel – (910) 452-1185
Fax – (910) 791-1338

www.woodplc.com

December 9, 2021

Mr. Chad McEwen
Pender County Manager
Pender County
805 South Walker Street
Burgaw, North Carolina 28425

Subject: Report of Regulated Materials Survey
Former BASF/Takeda Property
Highway 421 Pender County, Wilmington, North Carolina
Wood Project No. 6228210243

Dear Mr. McEwen:

Wood Environment & Infrastructure Solutions, Inc. (Wood) is pleased to present this Report of the Regulated Materials Survey for the property referenced above. Please do not hesitate to contact us if you have questions about this proposal.

Sincerely,
Wood Environment & Infrastructure Solutions, Inc.

A handwritten signature in blue ink, appearing to read "J. Chris Pruneau", is shown within a rectangular border.

J. Chris Pruneau, LG
Senior Project Manager

Wood Environment & Infrastructure Solutions, Inc.
5710 Oleander Drive, Suite 110
Wilmington, NC 28403
Licensure: NC Engineering F-1253; NC Geology C-247

Tel – (910) 452-1185
Fax – (910) 791-1338

TABLE OF CONTENTS

1.0 INTRODUCTION	1
2.0 BACKGROUND INFORMATION.....	1
3.0 RESULTS OF ANALYSIS.....	1
4.0 DECOMMISSIONING ACTION	2

TABLES

Table 1	Results of Analyses Oil and Grease and pH
Table 2	Results of VOC's and Metals

FIGURES

Figure 1	Sample Location Map
----------	---------------------

1.0 INTRODUCTION

Wood Environment & Infrastructure Solutions, Inc. (Wood) conducted a Regulated Materials Survey of the former BASF/Takeda brownfields property located off Highway 421 in Pender County, Wilmington, North Carolina (the Site). Asbestos and lead paint sampling and survey is provided in this bid package under a separate report. The Site is predominantly former industrial areas associated with a former Vitamin C manufacturing facility. A Site Vicinity Map identifying the site location and surrounding areas is provided in **Figure 1**.

The purpose of this work was to evaluate and characterize surface waters and residual sediments that remain in wastewater structures and secondary containment structures at the Site. In addition we tested soils in several small surface stained areas of the area known that we refer to as the northeast bone yard (see Figure 1). These activities were completed to provide guidance on removal and disposal of these soils, surface water and sediments prior to demolition and future redevelopment of the property. An asbestos survey of the site was also completed, and that report is provided with this demolition plan under separate cover.

2.0 BACKGROUND INFORMATION, MATERIAL SAMPLING

Wood has assessed the following areas so that these areas can be addressed during the decommissioning of the site. Each of the locations are shown on a drawing attached to this report.

- **Above ground waste oil tank** (approximately 500 gallon) was overturned with observed spillage of oils to surrounding to soils,
- **Approximately 15 5-gallon plastic containers of hydraulic oil** with some spillage to surface soils,
- **Four 55-gallon blue drums of hypochlorite solution** (used in wastewater treatment). Wood has confirmed through sampling that there is impact to surrounding soils.
- **Wastewater and Water System (liquid and solid residuals)** wastewater and water infrastructure and secondary containment systems from past operations are still present on the property. Some of the various infrastructure contains standing water and sediment. Examples of the these include clarification/settling concrete basins and secondary containment sumps.

Wood has conducted sampling of the soils, liquids and sediments in the above areas. Those results are included in this report. We have used the results of the testing to determine the final disposition of these materials including the need for off-site disposal. We have estimated quantities to allow for a contractor to provide a cost estimate to remove, transport and responsibly dispose of these materials as needed. This decommissioning work is required prior to the large-scale demolition of the remainder of the facility.

3.0 RESULTS OF ANALYSIS

The area names and the sampling locations for the regulated materials survey are provided on the attached Figure 1. The laboratory results of the testing conducted is summarized in the attached **Tables 1 and 2**. The laboratory reports are appended to this report.

The following areas were sampled. The areas are identified on the attached drawing by the following acronyms.

- SRB-South Rectangular Basin-surface water sampled, minimal sediment present, no sediment sample,
- RP- Retention Pond-surface water and sediment sampled,
- SB-1 Settling Basin No. 1- surface water and sediment sampled,
- SB-2 Settling Basin No. 2- surface water, minimal sediment present, no sediment sample,
- SB-3 Settling Basin No. 3- surface water and sediment sampled
- RBC-Rotating Biological Contactor Basin, surface water and sediment sampled
- CTFS- Chemical Tank Farm Sump-surface water and sediment sampled
- NEBMHS- NE Building Manhole Sump-Surface water and sediment sampled
- NEBY-NE Boneyard-soil sampling only
- ADA-Hypochlorite Drums Area- soil sampling only

4.0 DECOMMISSIONING ACTION FOR REGULATED MATERIALS

South Rectangular Basin (SRB)

The SRB system contains accumulated rainwater. There were no regulated compounds or constituents detected so surface water can be pumped to nearby soils for infiltration.

- Any remaining sediments will be solidified sufficiently to pass an EPA Paint Filter test and combined with sediments from other basins and removed and transported off site for disposal. These sediment wastes contain low level of various VOC's (e.g. acetone and toluene). A Wood field representative will be present during all of the removal actions to provide consulting assistance in the removal action.

Retention Pond

The retention pond was used for raw water storage for the plant fire water system. The past use and results of laboratory testing indicate the surface water can be pumped to nearby soils for infiltration. Any remaining sediments to be combined with sediments from other basins and removed and transported off site for disposal. A Wood field representative will be present during all of the removal actions to provide consulting assistance in the removal action.

- Summary of Action For Retention Pond Surface water can be pumped to the land surface in the areas approximately 200 to 400 feet west of the pond. This water will rapidly infiltrate to the subsurface. Approximately 30 tons of sediment will need to be removed from the site and disposed of offsite as a waste containing low levels of volatile organic compounds. Sediments will be solidified sufficiently to pass an EPA Paint Filter test and combined with sediments from other basins and removed and transported off site for disposal.

Settling Basin No. 1

The surface water and sediment in SB-1 will have to be removed and disposed of off site due to low levels of volatile organic compounds. A Wood field representative will be present during all of the removal actions to provide consulting assistance in the removal action.

- Approximately 45,000 gallons of water and 30 tons of sediment will need to be removed and hauled off site for disposal as a waste containing low concentrations of volatile organic compounds.

Settling Basin No. 2

There were no regulated compounds or constituents detected in surface water so surface water can be pumped to the land surface to the west for infiltration. Any remaining sediments to be combined with sediments from other basins and removed and transported off site for disposal. A Wood field representative will be present during all of the removal actions to provide consulting assistance in the removal action.

- Summary of Removal Action For SB-2. Surface water can be pumped to the land surface in the areas approximately 200 to 400 feet west of the retention pond. This water will rapidly infiltrate to the subsurface.
- Approximately 20 tons of sediment will need to be removed from the SB-2 and disposed of off site as a waste containing low levels of volatile organic compounds. Sediments will have to be solidified sufficiently to pass an EPA Paint Filter test and combined with sediments from other basins and removed and transported off site for disposal.

Settling Basin No. 3

The surface water and sediment in SB-3 will have to be removed and disposed of off site due to low levels of mercury (0.108 mg/L) and volatile organic compounds. The mercury concentration 0.108 mg/L may require specific handling and disposal requirements for both sediment and surface water from SB-3. A Wood field representative will be present during all of the removal actions to provide consulting assistance in the removal action.

- Approximately 38,000 gallons of water and 45 tons of sediment will need to be removed and hauled off site for disposal as a waste containing low concentrations of volatile organic compounds. The material will also contain low level of mercury and will be disposed of accordingly. Sediments will have to be solidified sufficiently to pass an EPA Paint Filter test and combined with sediments from other basins and removed and transported off site for disposal.

Rotating Biological Contactor

The surface water and sediment in the RBC will have to be removed and disposed of off site due to low levels of volatile organic compounds. There is equipment in the RBC unit that will likely have to be removed or partially removed to access the wastewater waste materials below.

- Approximately 10,000 gallons of water and 40 tons of sediment will have to be removed and disposed of offsite. A Wood field representative will be present during the removal actions to provide consulting assistance in the removal action.
- Sediments will have to be solidified sufficiently to pass an EPA Paint Filter test and combined with sediments from other basins and removed and transported off site for disposal.

Chemical Tank Farm Containment Area

The former Chemical Tank Farm has a concrete secondary containment system that contains a sump. The surface water and sediments in this secondary containment and in the sump will need

to be removed and disposed of due to elevated acetone and lower levels of various volatile organic compounds. A Wood field representative will be present during all of the removal actions to provide consulting assistance in the removal action.

- Approximately 2,000 gallons of water and 5 tons of sediment will need to be removed and hauled off site for disposal as a waste containing low concentrations of volatile organic compounds.
- Sediments will have to be solidified sufficiently to pass an EPA Paint Filter test and combined with sediments from other basins and removed and transported off site for disposal.

Northeast Building Manhole Sump

This area is a concrete secondary. The surface water and sediments in the secondary containment and the in the sump will need to be removed and disposed of due to elevated acetone and lower levels of various volatile organic compounds. A Wood field representative will be present during all of the removal actions to provide consulting assistance in the removal action.

- Approximately 2,000 gallons of water and 5 tons of sediment will need to be removed and hauled off site for disposal as a waste containing low concentrations of volatile organic compounds.
- Sediments will have to be solidified sufficiently to pass an EPA Paint Filter test and combined with sediments from other basins and removed and transported off site for disposal.

Summary of Water and Sediment to Be Removed By Location

AREA	AREA (SQFT)	WATER DEPTH (FT)	Gallons To Be Removed for Disposal	SEDIMENT VOL (Tons)
RBC	1843	1	10,000	40
SB-1	1318	4	45,000	30
SB-2	476	5	NA	20
SB-3	2144	2	38,000*	45
SRB	542	3	NA	10
CFTFS	NA	4	2,000	5
RP	NA	NA	NA	40
NEDBMS	NA	NA	2,000	5
		Totals	97,000	270*

Notes: Water from SB-3 Contains low concentrations of mercury (0.100 mg/liter), sediment and water from SB-3 will have to be disposed of accordingly. Other waters and sediments being disposed of off site contain low concentrations of several VOC's. See Attached Lab Summary Tables 1 and 2.

*Amount of sediment increased by 40% to account for addition of solidification admixture.

Northeast Boneyard (Soils and Used Oil Removal and Disposal)

Soils in several smaller areas of the northeast boneyard as shown on the attached figure, have been impacted by releases of hydraulic oils stored in 5-gallon containers and around a former used oil tank. The contractor will have to excavate and remove from the site for off-site disposal an estimated 90 tons of oil impacted soil. A Wood field representative will be present during all of the removal actions to direct the excavation locations and conduct and necessary sampling to confirm completion of excavation.

- **Approximately 90 tons of oil containing soils will have to be excavated and disposed of at an off site facility. The oil sources is hydraulic oil and used oil.**
- **In addition there will be approximately 300 gallons of used oils and hydraulic oils to be removed and disposed of off-site.** The waste oil tank and secondary containment steel structure will also have to be removed from the property.

The information from this regulated materials assessment report is to be used by the contractor in bidding the decommissioning and demolition of the subject facility.

Table 1: BASF Regulated Materials Survey Oil & Grease and pH Results
Former Brownfields Property
Pender Commerce Park
Wilmington, North Carolina
Wood Project: 6228-21-0243

Field Area	Sample ID	Date Sampled	Oil & Grease	pH
Northeast Boneyard (NEBY)	SS-1(0-1)	11/2/2021	12600	NS
	SS-2(0-1)	11/2/2021	20300 V	NS
	SS-3(0-1)	11/2/2021	22600 J3 V	NS
	SS-4(0-1)	11/2/2021	7180	NS
	SS-4A(1-2)	11/2/2021	41.7 J	NS
	SS-4B(1-2)	11/2/2021	168	NS
	SS-4C(1-2)	11/2/2021	ND	NS
	SS-4D(1-2)	11/2/2021	152	NS
	SS-4E(3-4)	11/2/2021	331	NS
	SS-5(0-1)	11/2/2021	31100	NS
Hydrochlorite Drum Area (HDA)	SS-1(0-1)	11/2/2021	NS	8.82
	SS-2(0-1)	11/2/2021	NS	8.40
	SS-3(0-1)	11/2/2021	NS	8.66
Chemical Tank Farm Sump	SW-1	11/2/2021	ND	NS
	SED_SS-1	11/3/2021	676 J	7.06
Retention Pond (RP)	SW-1	12/2/2021	ND	6.81
	SED_SS-1	11/4/2021	ND	6.81
Settling Basin 1 (SB-1)	SW-1	11/3/2021	ND	NS
	SED_SS-1	11/4/2021	659	7.51
Settling Basin 2 (SB-2)	SW-1	11/3/2021	ND	NS
Settling Basin 3 (SB-3)	SW-1	11/3/2021	ND	NS
	SED_SS-1	11/4/2021	1460	7.39
RBC	SW-1	11/3/2021	ND	NS
	SED-SS-1	11/4/2021	1190	7.07
NE. Building Manhole Sump (NEBMNS)	SW-1	11/2/2021	ND	NS
South Rectangle Basin (SRB)	SW-1	11/3/2021	ND	NS

Notes:

Oil & grease results reported in mg/kg

pH reported in Standard Units (S.U.)

All pH results have T8 qualifier

NS: Not sampled e.g. insufficient sediment to sample

ND: Analyte was not detected above the laboratory reportable detection limit (RDL)

SED: Sediment

SS: Soil Sample

SW: Surface Water Sample

J qualifier: the identification of the analyte is acceptable; the reported value is an estimate

V qualifier: the sample concentration is too high to evaluate accurate spike recoveries

J3 qualifier: the associated batch QC was outside the established quality control range for precision

T8 qualifier: Sample received past/too close to holding time expiration

B qualifier: The same analyte is found in associated blank

Oil & Grease analyzed by EPA Method 9071 B

pH analyzed by EPA Method 9045 D

NC Action Level -100 mg/kg for Oil & Grease

Created by: NEB 12/2/2021

Checked by: AMS 12/6/2021

Table 2: Water, Sediment Soils VOCs, PCB's and Metals Results
Former Brownfields Property
Pender Commerce Park
Wilmington, North Carolina
Wood Project: 6228-21-0243

Field Area	NC 2L Standard (mg/L)	Chemical tank Farm Sump (CTFS)		Retention Pond (RP)		Settling Basin-1 (SB-1)		Settling Basin-2 (SB-2)	Settling Basin-3 (SB-3)		RBC		NE. Building Manhole Sump (NEBMNS)	South Rectangle Basin (SRB)
Sample ID		SW-1	SED_SS-1	SW-1	SED_SS-1	SW-1	SED_SS-1	SW-1	SW-1	SED_SS-1	SW-1	SED_SS-1	SW-1	SW-1
Constituent (mg/kg)	Date Sampled	11/2/2021	11/3/2021	11/3/2021	11/4/2021	11/3/2021	11/4/2021	11/3/2021	11/3/2021	11/4/2021	11/3/2021	11/4/2021	11/2/2021	11/3/2021
Volatile Organic Compounds (8260D)														
Acetone	6	695	2.23	ND	ND	26.1 J	ND	ND	14.6 J	ND	ND	0.498 J	26.1 J	ND
Benzene	1	ND	0.0514	ND	ND	ND	0.0684	ND	ND	0.0206	ND	ND	ND	ND
1,2-Dichloropropane	0.6	ND	0.108	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Ethylbenzene	600	ND	0.0424 J	ND	ND	ND	0.0467	ND	ND	ND	ND	0.00858 J	ND	ND
Isopropylbenzene	70	ND	0.0115 J	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
2-Butanone (MEK)	4*	ND	1.59 B J	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
4-Methyl 2-pentanone (MIBK)	0.1*	ND	ND	ND	ND	ND	0.0562 J	ND	ND	ND	ND	ND	ND	ND
Styrene	70	ND	0.0115 J	ND	ND	ND	0.0165 J	ND	ND	ND	ND	0.00721 J	ND	ND
Toluene	600	ND	0.111	ND	0.103 J	ND	1.76	ND	ND	0.435	ND	0.0216 J	ND	ND
Trichloroethene	3	ND	ND	ND	ND	ND	0.00887	ND	ND	ND	ND	ND	ND	ND
Trichlorofluoromethane	2	ND	1.86	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
1,2,4-Trimethylbenzene	400	ND	0.0382 J	ND	ND	ND	0.0215 J	ND	ND	ND	ND	ND	ND	ND
1,3,5-Tricmethylbenzene	400	ND	0.0445 J	ND	ND	ND	0.388	ND	ND	0.215	ND	ND	ND	ND
Xylenes, Total	500	ND	0.103 J	ND	0.0796 J	ND	0.0789	ND	ND	0.0140 J	ND	0.0149 J	ND	ND
Metals (6010D)														
Arsenic	10	ND	NS	ND	NS	ND	NS	ND	ND	NS	ND	NS	ND	ND
Barium	700	46.1	NS	5.33	NS	284	NS	180	196	NS	8.29	NS	30.9	36.0
Chromium	10	1.51 J	NS	ND	NS	ND	NS	ND	ND	NS	ND	NS	ND	ND
Polychlorinated Biphenyls (8082A)	0.09*	NS	ND	ND	NS	NS	ND	NS	NS	ND	NS	ND	NS	NS
Mercury (7470A)	1	ND	NS	ND	ND	ND	NS	ND	0.108 J	NS	ND	NS	ND	ND

Notes:

Results reported in mg/kg

Bold values indicate concentrations above the respective 2L Standard

NS: Not sampled

ND: Analyte was not detected above the laboratory reportable detection limit (RDL)

SED: Sediment

SS: Soil Sample

SW: Surface Water Sample

J qualifier: The identification of the analyte is acceptable; the reported value is an estimate

V qualifier: The sample concentration is too high to evaluate accurate spike recoveries

J3 qualifier: The associated batch QC was outside the established quality control range for precision

T8 qualifier: Sample received past/too close to holding time expiration

B qualifier: The same analyte is found in associated blank

Volatile Organic Compounds analyzed by EPA Method 8260D


Metals analyzed by EPA Method 6010D

Polychlorinated Biphenyls analyzed by EPA Method 8082A

Created by: NEB 12/3/2021

Checked by: AMS 12/6/2021

Mercury analyzed by EPA Method 7470A

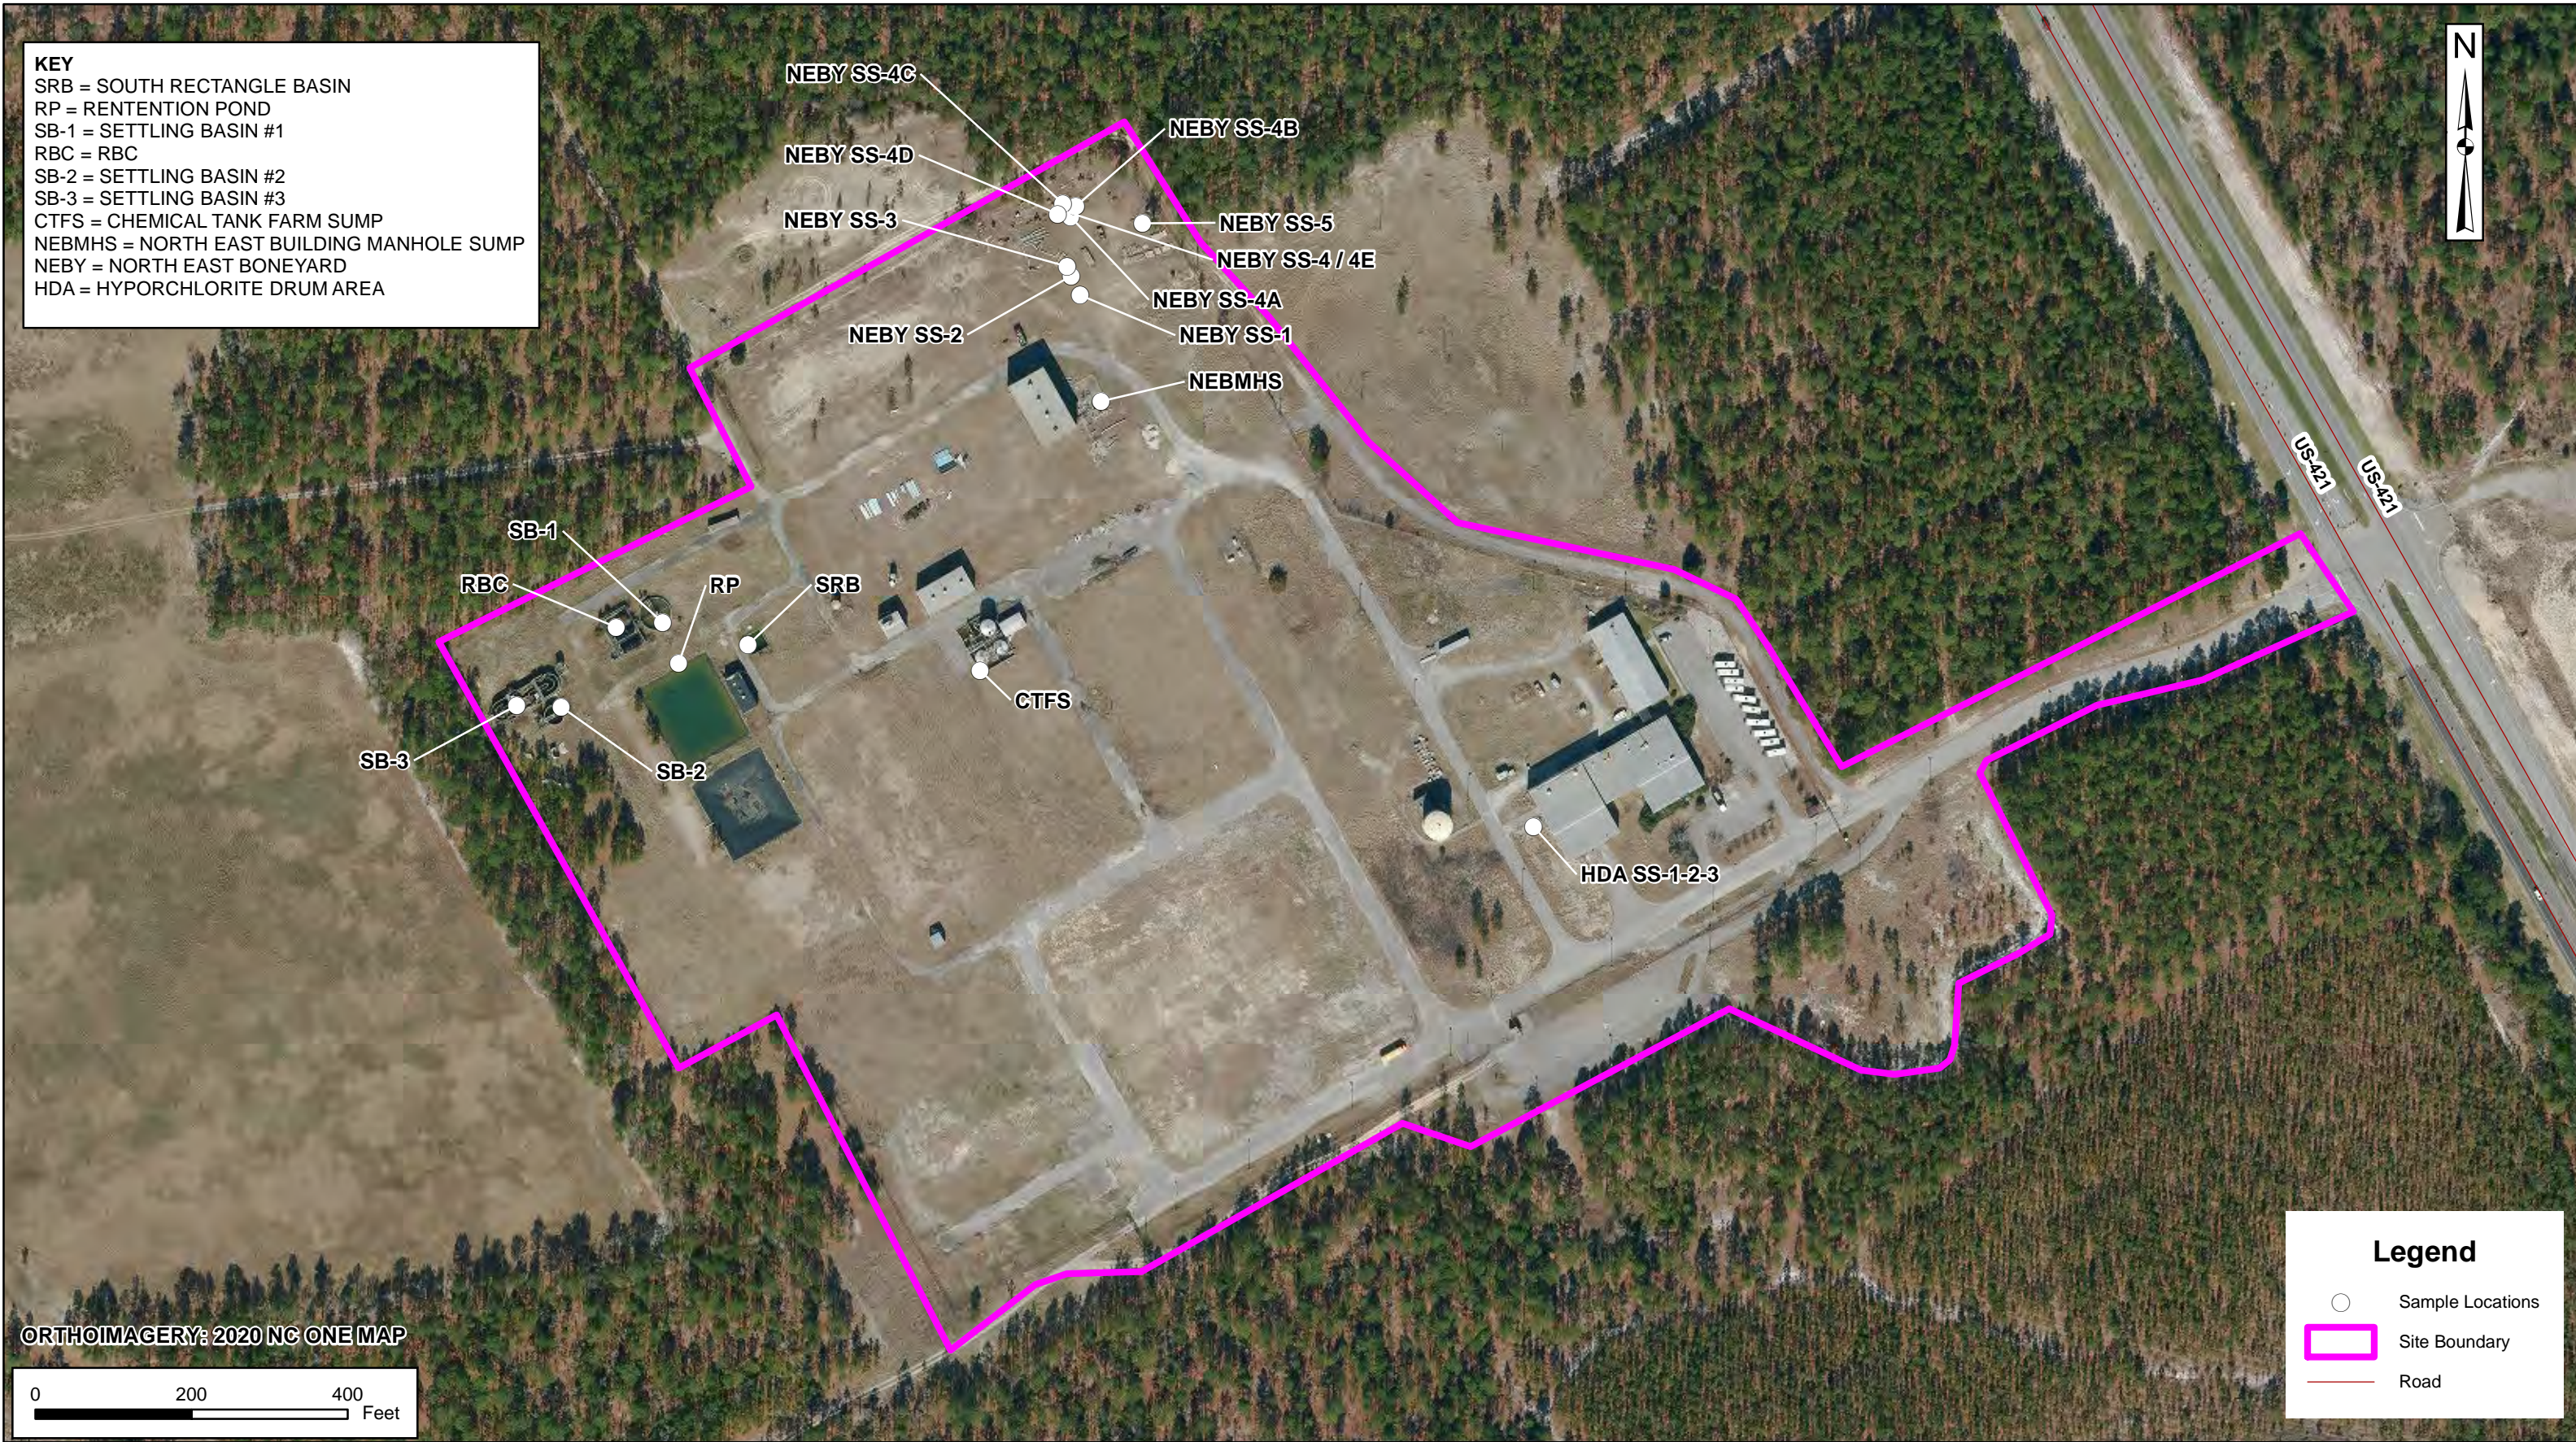

<div>Wood Environment & Infrastructure Solutions, Inc.</div> <div>5710 Oleander Drive, Suite 110 Wilmington, NC 28403 (910) 452-1185</div>	TITLE: <div>FORMER BASF</div>		<div>wood.</div>	CLIENT: <div>PENDER COUNTY</div>			Figure <div>1</div>
	SITE: <div>HIGHWAY 421 PENDER COUNTY, NORTH CAROLINA</div>			DATE: 11-09-2021	SCALE: AS SHOWN	PROJ.: 6228210243	
				DR: WBM	CHK: JCP		
				LOCATION: \\wlm-fs1\projects\Projects\CLIENTS\Pender County\Demolition Management\Figures, CAD Files\GIS\mxd\Former BASF.mxd			



Environmental Chemists, Inc.

6602 Windmill Way, Wilmington, NC 28405 • 910.392.0223 Lab • 910.392.4424 Fax
710 Bowsertown Road, Manteo, NC 27954 • 252.473.5702 Lab/Fax
255-A Wilmington Highway, Jacksonville, NC 28540 • 910.347.5843 Lab/Fax

ANALYTICAL & CONSULTING CHEMISTS

info@environmentalchemists.com

Wood -AMEC

5710 Oleander Drive , Suite 110
Wilmington NC 28405
Attention:

Date of Report: Dec 15, 2021

Customer PO #:

Customer ID: 11070019

Report #: 2021-21368

Project ID: Pender Demo

Lab ID	Sample ID:	Collect Date/Time	Matrix	Sampled by
21-53542	Site: RP-1	12/2/2021 2:36 PM	Water	Client

Test	Method	Results	Date Analyzed
Oil & Grease (O&G)	EPA 1664 Rev. B	<5.0 mg/L	12/10/2021
DRO	SW-846 8015 C	<0.1 mg/L	12/06/2021

Lab ID	Sample ID:	Collect Date/Time	Matrix	Sampled by
21-53542A	Site: RP-1	12/2/2021 2:36 PM	Water	Client

Test	Method	Results	Date Analyzed
Oil & Grease (O&G)	EPA 1664 With Silica Gel	42 mg/L	12/13/2021

Lab ID	Sample ID:	Collect Date/Time	Matrix	Sampled by
21-53543	Site: SB-1	12/2/2021 3:05 PM	Water	Client

Test	Method	Results	Date Analyzed
Oil & Grease (O&G)	EPA 1664 Rev. B	<5.0 mg/L	12/10/2021
DRO	SW-846 8015 C	0.254 mg/L	12/06/2021

Lab ID	Sample ID:	Collect Date/Time	Matrix	Sampled by
21-53543A	Site: SB-1	12/2/2021 3:05 PM	Water	Client

Test	Method	Results	Date Analyzed
Oil & Grease (O&G)	EPA 1664 With Silica Gel	<5.0 mg/L	12/13/2021

Comment:

Reviewed by: 

Wood E&I Solutions Inc. - Wilmington, NC

Sample Delivery Group: L1427990
Samples Received: 11/06/2021
Project Number:
Description: Former BASF
Site: PENDER COUNTY
Report To: Chris Pruneau
5710 Oleander Drive, Suite 110
Wilmington, NC 28403

Entire Report Reviewed By:

[Preliminary Report]

Heather J Wagner
Project Manager

Results relate only to the items tested or calibrated and are reported as rounded values. This test report shall not be reproduced, except in full, without written approval of the laboratory. Where applicable, sampling conducted by Pace Analytical National is performed per guidance provided in laboratory standard operating procedures ENV-SOP-MTJL-0067 and ENV-SOP-MTJL-0068. Where sampling conducted by the customer, results relate to the accuracy of the information provided, and as the samples are received.

Pace Analytical National12065 Lebanon Rd Mount Juliet, TN 37122 615-758-5858 800-767-5859 www.pacenational.com

TABLE OF CONTENTS

Cp: Cover Page	1
Tc: Table of Contents	2
Ss: Sample Summary	3
Cn: Case Narrative	8
Sr: Sample Results	9
NEB-1_SS-1_0-1 L1427990-01	9
NEB-1_SS-2_0-1 L1427990-02	10
NEB-1_SS-3_0-1 L1427990-03	11
NEB-1_SS-4_0-1 L1427990-04	12
NEB-1_SS-4A_1-2 L1427990-05	13
NEB-1_SS-4B_1-2 L1427990-06	14
NEB-1_SS-4C_1-2 L1427990-07	15
NEB-1_SS-4D_1-2 L1427990-08	16
NEB-1_SS-4E_3-4 L1427990-09	17
NEB-1_SS-5_0-1 L1427990-10	18
HDA_SS-1_0-1 L1427990-11	19
HDA_SS-2_0-1 L1427990-12	20
HDA_SS-3_0-1 L1427990-13	21
CTFS_SED_SS-1 L1427990-14	22
RP_SED_SS-1 L1427990-16	24
SB-1_SED_SS-1 L1427990-18	26
RBC_SED_SS-1 L1427990-20	28
SB-3_SED_SS-1 L1427990-22	30
NEBMHS_SW-1 L1427990-25	32
CTFS_SW-1 L1427990-26	34
SKB_SW-1 L1427990-27	36
RP_SW-1 L1427990-28	38
SB-1_SW-1 L1427990-29	40
RBC_SW-1 L1427990-30	42
SB-2_SW-1 L1427990-31	44
SB-3_SW-1 L1427990-32	46
Qc: Quality Control Summary	48
Total Solids by Method 2540 G-2011	48
Wet Chemistry by Method 1664B	50
Wet Chemistry by Method 9071B	52
Metals (ICP) by Method 6010D	54
Gl: Glossary of Terms	55
Al: Accreditations & Locations	57
Sc: Sample Chain of Custody	58

¹ Cp
² Tc
³ Ss
⁴ Cn
⁵ Sr
⁶ Qc
⁷ Gl
⁸ Al
⁹ Sc

SAMPLE SUMMARY

NEB-1_SS-1_0-1 L1427990-01 Solid

				Collected by B. Mabie	Collected date/time 11/02/21 11:15	Received date/time 11/06/21 09:00
Method	Batch	Dilution	Preparation date/time	Analysis date/time	Analyst	Location
Total Solids by Method 2540 G-2011	WG1771086	1	11/10/21 15:54	11/10/21 16:10	CMK	Mt. Juliet, TN
Wet Chemistry by Method 9071B	WG1769339	1	11/08/21 19:07	11/09/21 01:42	WAW	Mt. Juliet, TN

NEB-1_SS-2_0-1 L1427990-02 Solid

				Collected by B. Mabie	Collected date/time 11/02/21 11:30	Received date/time 11/06/21 09:00
Method	Batch	Dilution	Preparation date/time	Analysis date/time	Analyst	Location
Total Solids by Method 2540 G-2011	WG1771086	1	11/10/21 15:54	11/10/21 16:10	CMK	Mt. Juliet, TN
Wet Chemistry by Method 9071B	WG1769339	1	11/08/21 19:07	11/09/21 01:42	WAW	Mt. Juliet, TN

NEB-1_SS-3_0-1 L1427990-03 Solid

				Collected by B. Mabie	Collected date/time 11/02/21 11:40	Received date/time 11/06/21 09:00
Method	Batch	Dilution	Preparation date/time	Analysis date/time	Analyst	Location
Total Solids by Method 2540 G-2011	WG1771086	1	11/10/21 15:54	11/10/21 16:10	CMK	Mt. Juliet, TN
Wet Chemistry by Method 9071B	WG1771465	1	11/10/21 07:16	11/10/21 15:38	ERK	Mt. Juliet, TN

NEB-1_SS-4_0-1 L1427990-04 Solid

				Collected by B. Mabie	Collected date/time 11/02/21 11:50	Received date/time 11/06/21 09:00
Method	Batch	Dilution	Preparation date/time	Analysis date/time	Analyst	Location
Total Solids by Method 2540 G-2011	WG1771086	1	11/10/21 15:54	11/10/21 16:10	CMK	Mt. Juliet, TN
Wet Chemistry by Method 9071B	WG1771465	1	11/10/21 07:16	11/10/21 15:38	ERK	Mt. Juliet, TN

NEB-1_SS-4A_1-2 L1427990-05 Solid


				Collected by B. Mabie	Collected date/time 11/02/21 12:00	Received date/time 11/06/21 09:00
Method	Batch	Dilution	Preparation date/time	Analysis date/time	Analyst	Location
Total Solids by Method 2540 G-2011	WG1771086	1	11/10/21 15:54	11/10/21 16:10	CMK	Mt. Juliet, TN
Wet Chemistry by Method 9071B	WG1771465	1	11/10/21 07:16	11/10/21 15:38	ERK	Mt. Juliet, TN

NEB-1_SS-4B_1-2 L1427990-06 Solid

				Collected by B. Mabie	Collected date/time 11/02/21 12:15	Received date/time 11/06/21 09:00
Method	Batch	Dilution	Preparation date/time	Analysis date/time	Analyst	Location
Total Solids by Method 2540 G-2011	WG1771086	1	11/10/21 15:54	11/10/21 16:10	CMK	Mt. Juliet, TN
Wet Chemistry by Method 9071B	WG1771465	1	11/10/21 07:16	11/10/21 15:38	ERK	Mt. Juliet, TN

NEB-1_SS-4C_1-2 L1427990-07 Solid

				Collected by B. Mabie	Collected date/time 11/02/21 12:30	Received date/time 11/06/21 09:00
Method	Batch	Dilution	Preparation date/time	Analysis date/time	Analyst	Location
Total Solids by Method 2540 G-2011	WG1771087	1	11/10/21 17:13	11/10/21 17:32	CMK	Mt. Juliet, TN
Wet Chemistry by Method 9071B	WG1771465	1	11/10/21 07:16	11/10/21 15:38	ERK	Mt. Juliet, TN



SAMPLE SUMMARY

NEB-1_SS-4D_1-2 L1427990-08 Solid

Collected by
B. Mabie

Collected date/time
11/02/21 12:40

Received date/time
11/06/21 09:00

Method	Batch	Dilution	Preparation date/time	Analysis date/time	Analyst	Location
Total Solids by Method 2540 G-2011	WG1771087	1	11/10/21 17:13	11/10/21 17:32	CMK	Mt. Juliet, TN
Wet Chemistry by Method 9071B	WG1771465	1	11/10/21 07:16	11/10/21 15:38	ERK	Mt. Juliet, TN

¹ Cp

² Tc

³ Ss

⁴ Cn

⁵ Sr

⁶ Qc

⁷ Gl

⁸ Al

⁹ Sc

NEB-1_SS-4E_3-4 L1427990-09 Solid

Collected by
B. Mabie

Collected date/time
11/02/21 12:50

Received date/time
11/06/21 09:00

Method	Batch	Dilution	Preparation date/time	Analysis date/time	Analyst	Location
Total Solids by Method 2540 G-2011	WG1771087	1	11/10/21 17:13	11/10/21 17:32	CMK	Mt. Juliet, TN
Wet Chemistry by Method 9071B	WG1771465	1	11/10/21 07:16	11/10/21 15:38	ERK	Mt. Juliet, TN

NEB-1_SS-5_0-1 L1427990-10 Solid

Collected by
B. Mabie

Collected date/time
11/02/21 13:00

Received date/time
11/06/21 09:00

Method	Batch	Dilution	Preparation date/time	Analysis date/time	Analyst	Location
Total Solids by Method 2540 G-2011	WG1771087	1	11/10/21 17:13	11/10/21 17:32	CMK	Mt. Juliet, TN
Wet Chemistry by Method 9071B	WG1771465	1	11/10/21 07:16	11/10/21 15:38	ERK	Mt. Juliet, TN

HDA_SS-1_0-1 L1427990-11 Solid

Collected by
B. Mabie

Collected date/time
11/02/21 14:40

Received date/time
11/06/21 09:00

Method	Batch	Dilution	Preparation date/time	Analysis date/time	Analyst	Location
Total Solids by Method 2540 G-2011	WG1771087	1	11/10/21 17:13	11/10/21 17:32	CMK	Mt. Juliet, TN
Wet Chemistry by Method 9045D	WG1771257	1	11/09/21 14:00	11/09/21 14:00	PSN	Mt. Juliet, TN

HDA_SS-2_0-1 L1427990-12 Solid

Collected by
B. Mabie

Collected date/time
11/02/21 14:50

Received date/time
11/06/21 09:00

Method	Batch	Dilution	Preparation date/time	Analysis date/time	Analyst	Location
Total Solids by Method 2540 G-2011	WG1771087	1	11/10/21 17:13	11/10/21 17:32	CMK	Mt. Juliet, TN
Wet Chemistry by Method 9045D	WG1771257	1	11/09/21 14:00	11/09/21 14:00	PSN	Mt. Juliet, TN

HDA_SS-3_0-1 L1427990-13 Solid

Collected by
B. Mabie

Collected date/time
11/02/21 15:00

Received date/time
11/06/21 09:00

Method	Batch	Dilution	Preparation date/time	Analysis date/time	Analyst	Location
Total Solids by Method 2540 G-2011	WG1771087	1	11/10/21 17:13	11/10/21 17:32	CMK	Mt. Juliet, TN
Wet Chemistry by Method 9045D	WG1771257	1	11/09/21 14:00	11/09/21 14:00	PSN	Mt. Juliet, TN

CTFS_SED_SS-1 L1427990-14 Solid

Collected by
B. Mabie

Collected date/time
11/03/21 14:40

Received date/time
11/06/21 09:00

Method	Batch	Dilution	Preparation date/time	Analysis date/time	Analyst	Location
Total Solids by Method 2540 G-2011	WG1771087	1	11/10/21 17:13	11/10/21 17:32	CMK	Mt. Juliet, TN
Wet Chemistry by Method 9045D	WG1771257	1	11/09/21 14:00	11/09/21 14:00	PSN	Mt. Juliet, TN
Wet Chemistry by Method 9071B	WG1771465	1	11/10/21 07:16	11/10/21 15:38	ERK	Mt. Juliet, TN
Volatile Organic Compounds (GC/MS) by Method 8260D	WG1774458	1.5	11/03/21 14:40	11/15/21 15:27	ADM	Mt. Juliet, TN
Polychlorinated Biphenyls (GC) by Method 8082 A	WG1772854	1	11/15/21 23:22	11/16/21 20:46	JMB	Mt. Juliet, TN

SAMPLE SUMMARY

RP_SED_SS-1 L1427990-16 Solid

Collected by
B. Mabie

Collected date/time
11/04/21 09:30

Received date/time
11/06/21 09:00

Method	Batch	Dilution	Preparation date/time	Analysis date/time	Analyst	Location
Total Solids by Method 2540 G-2011	WG1771087	1	11/10/21 17:13	11/10/21 17:32	CMK	Mt. Juliet, TN
Wet Chemistry by Method 9045D	WG1771257	1	11/09/21 14:00	11/09/21 14:00	PSN	Mt. Juliet, TN
Wet Chemistry by Method 9071B	WG1771465	1	11/10/21 07:16	11/10/21 15:38	ERK	Mt. Juliet, TN
Volatile Organic Compounds (GC/MS) by Method 8260D	WG1774458	1.38	11/04/21 09:30	11/15/21 15:46	ADM	Mt. Juliet, TN
Polychlorinated Biphenyls (GC) by Method 8082 A	WG1772854	1	11/15/21 23:22	11/16/21 20:56	JMB	Mt. Juliet, TN

SB-1_SED_SS-1 L1427990-18 Solid

Collected by
B. Mabie

Collected date/time
11/04/21 10:40

Received date/time
11/06/21 09:00

Method	Batch	Dilution	Preparation date/time	Analysis date/time	Analyst	Location
Total Solids by Method 2540 G-2011	WG1771087	1	11/10/21 17:13	11/10/21 17:32	CMK	Mt. Juliet, TN
Wet Chemistry by Method 9045D	WG1771257	1	11/09/21 14:00	11/09/21 14:00	PSN	Mt. Juliet, TN
Wet Chemistry by Method 9071B	WG1771465	1	11/10/21 07:16	11/10/21 15:38	ERK	Mt. Juliet, TN
Volatile Organic Compounds (GC/MS) by Method 8260D	WG1771934	1.32	11/04/21 10:40	11/10/21 13:19	JHH	Mt. Juliet, TN
Polychlorinated Biphenyls (GC) by Method 8082 A	WG1772854	1	11/15/21 23:22	11/17/21 20:37	AMM	Mt. Juliet, TN

RBC_SED_SS-1 L1427990-20 Solid

Collected by
B. Mabie

Collected date/time
11/04/21 11:30

Received date/time
11/06/21 09:00

Method	Batch	Dilution	Preparation date/time	Analysis date/time	Analyst	Location
Total Solids by Method 2540 G-2011	WG1771166	1	11/10/21 13:02	11/10/21 13:28	CMK	Mt. Juliet, TN
Wet Chemistry by Method 9045D	WG1771257	1	11/09/21 14:00	11/09/21 14:00	PSN	Mt. Juliet, TN
Wet Chemistry by Method 9071B	WG1771465	1	11/10/21 07:16	11/10/21 16:23	ERK	Mt. Juliet, TN
Volatile Organic Compounds (GC/MS) by Method 8260D	WG1774458	1.07	11/04/21 11:30	11/15/21 16:05	ADM	Mt. Juliet, TN
Polychlorinated Biphenyls (GC) by Method 8082 A	WG1772854	1	11/15/21 23:22	11/16/21 21:15	JMB	Mt. Juliet, TN

SB-3_SED_SS-1 L1427990-22 Solid

Collected by
B. Mabie

Collected date/time
11/04/21 14:00

Received date/time
11/06/21 09:00

Method	Batch	Dilution	Preparation date/time	Analysis date/time	Analyst	Location
Total Solids by Method 2540 G-2011	WG1771166	1	11/10/21 13:02	11/10/21 13:28	CMK	Mt. Juliet, TN
Wet Chemistry by Method 9045D	WG1771257	1	11/09/21 14:00	11/09/21 14:00	PSN	Mt. Juliet, TN
Wet Chemistry by Method 9071B	WG1771465	1	11/10/21 07:16	11/10/21 16:23	ERK	Mt. Juliet, TN
Volatile Organic Compounds (GC/MS) by Method 8260D	WG1771934	1.32	11/04/21 14:00	11/10/21 13:38	JHH	Mt. Juliet, TN
Polychlorinated Biphenyls (GC) by Method 8082 A	WG1772854	1	11/15/21 23:22	11/17/21 20:45	AMM	Mt. Juliet, TN


NEBMHS_SW-1 L1427990-25 GW

Collected by
B. Mabie

Collected date/time
11/02/21 15:30

Received date/time
11/06/21 09:00

Method	Batch	Dilution	Preparation date/time	Analysis date/time	Analyst	Location
Wet Chemistry by Method 1664B	WG1772765	1	11/11/21 17:45	11/12/21 08:22	ERK	Mt. Juliet, TN
Mercury by Method 7470A	WG1772646	1	11/12/21 08:35	11/14/21 15:09	MRW	Mt. Juliet, TN
Metals (ICP) by Method 6010D	WG1778865	1	11/23/21 08:30	11/23/21 23:11	CCE	Mt. Juliet, TN
Volatile Organic Compounds (GC/MS) by Method 8260D	WG1773047	1	11/12/21 00:55	11/12/21 00:55	JHH	Mt. Juliet, TN



SAMPLE SUMMARY

CTFS_SW-1 L1427990-26 GW

Collected by
B. Mabie

Collected date/time
11/02/21 15:50

Received date/time
11/06/21 09:00

Method	Batch	Dilution	Preparation date/time	Analysis date/time	Analyst	Location
Wet Chemistry by Method 1664B	WG1772765	1	11/11/21 17:45	11/12/21 08:22	ERK	Mt. Juliet, TN
Mercury by Method 7470A	WG1772646	1	11/12/21 08:35	11/14/21 15:11	MRW	Mt. Juliet, TN
Metals (ICP) by Method 6010D	WG1778865	1	11/23/21 08:30	11/23/21 23:28	CCE	Mt. Juliet, TN
Volatile Organic Compounds (GC/MS) by Method 8260D	WG1773047	1	11/12/21 01:15	11/12/21 01:15	JHH	Mt. Juliet, TN
Volatile Organic Compounds (GC/MS) by Method 8260D	WG1774720	10	11/16/21 14:58	11/16/21 14:58	ACG	Mt. Juliet, TN

¹ Cp

² Tc

³ Ss

⁴ Cn

SKB_SW-1 L1427990-27 GW

Collected by
B. Mabie

Collected date/time
11/03/21 10:30

Received date/time
11/06/21 09:00

Method	Batch	Dilution	Preparation date/time	Analysis date/time	Analyst	Location
Wet Chemistry by Method 1664B	WG1772765	1	11/11/21 17:45	11/12/21 08:22	ERK	Mt. Juliet, TN
Mercury by Method 7470A	WG1772646	1	11/12/21 08:35	11/14/21 15:13	MRW	Mt. Juliet, TN
Metals (ICP) by Method 6010D	WG1778865	1	11/23/21 08:30	11/23/21 23:31	CCE	Mt. Juliet, TN
Volatile Organic Compounds (GC/MS) by Method 8260D	WG1773075	1	11/12/21 10:10	11/12/21 10:10	JAH	Mt. Juliet, TN

⁵ Sr

⁶ Qc

⁷ Gl

⁸ Al

RP_SW-1 L1427990-28 GW

Collected by
B. Mabie

Collected date/time
11/03/21 10:50

Received date/time
11/06/21 09:00

Method	Batch	Dilution	Preparation date/time	Analysis date/time	Analyst	Location
Wet Chemistry by Method 1664B	WG1772765	1	11/11/21 17:45	11/12/21 08:22	ERK	Mt. Juliet, TN
Mercury by Method 7470A	WG1772646	1	11/12/21 08:35	11/14/21 15:15	MRW	Mt. Juliet, TN
Metals (ICP) by Method 6010D	WG1778865	1	11/23/21 08:30	11/23/21 23:39	CCE	Mt. Juliet, TN
Volatile Organic Compounds (GC/MS) by Method 8260D	WG1773185	1	11/12/21 04:42	11/12/21 04:42	BMB	Mt. Juliet, TN

⁹ Sc

SB-1_SW-1 L1427990-29 GW

Collected by
B. Mabie

Collected date/time
11/03/21 11:00

Received date/time
11/06/21 09:00

Method	Batch	Dilution	Preparation date/time	Analysis date/time	Analyst	Location
Wet Chemistry by Method 1664B	WG1773481	1	11/12/21 16:32	11/15/21 15:49	ERK	Mt. Juliet, TN
Mercury by Method 7470A	WG1772646	1	11/12/21 08:35	11/14/21 15:17	MRW	Mt. Juliet, TN
Metals (ICP) by Method 6010D	WG1778865	1	11/23/21 08:30	11/23/21 23:42	CCE	Mt. Juliet, TN
Volatile Organic Compounds (GC/MS) by Method 8260D	WG1773185	1	11/12/21 05:02	11/12/21 05:02	BMB	Mt. Juliet, TN

RBC_SW-1 L1427990-30 GW

Collected by
B. Mabie

Collected date/time
11/03/21 11:20

Received date/time
11/06/21 09:00

Method	Batch	Dilution	Preparation date/time	Analysis date/time	Analyst	Location
Wet Chemistry by Method 1664B	WG1772766	1	11/11/21 17:59	11/12/21 08:33	ERK	Mt. Juliet, TN
Mercury by Method 7470A	WG1772646	1	11/12/21 08:35	11/14/21 15:19	MRW	Mt. Juliet, TN
Metals (ICP) by Method 6010D	WG1778865	1	11/23/21 08:30	11/23/21 23:44	CCE	Mt. Juliet, TN
Volatile Organic Compounds (GC/MS) by Method 8260D	WG1773185	1	11/12/21 05:50	11/12/21 05:50	BMB	Mt. Juliet, TN

SB-2_SW-1 L1427990-31 GW

Collected by
B. Mabie

Collected date/time
11/03/21 13:10

Received date/time
11/06/21 09:00

Method	Batch	Dilution	Preparation date/time	Analysis date/time	Analyst	Location
Wet Chemistry by Method 1664B	WG1772766	1	11/11/21 17:59	11/12/21 08:33	ERK	Mt. Juliet, TN
Mercury by Method 7470A	WG1772646	1	11/12/21 08:35	11/14/21 15:25	MRW	Mt. Juliet, TN
Metals (ICP) by Method 6010D	WG1778865	1	11/23/21 08:30	11/23/21 23:47	CCE	Mt. Juliet, TN
Volatile Organic Compounds (GC/MS) by Method 8260D	WG1773185	1	11/12/21 06:11	11/12/21 06:11	BMB	Mt. Juliet, TN

SAMPLE SUMMARY

SB-3_SW-1 L1427990-32 GW

Collected by
B. Mabie

Collected date/time
11/03/21 13:20

Received date/time
11/06/21 09:00

Method	Batch	Dilution	Preparation date/time	Analysis date/time	Analyst	Location
Wet Chemistry by Method 1664B	WG1773481	1	11/12/21 16:32	11/15/21 15:49	ERK	Mt. Juliet, TN
Mercury by Method 7470A	WG1772646	1	11/12/21 08:35	11/14/21 15:27	MRW	Mt. Juliet, TN
Metals (ICP) by Method 6010D	WG1778865	1	11/23/21 08:30	11/23/21 23:50	CCE	Mt. Juliet, TN
Volatile Organic Compounds (GC/MS) by Method 8260D	WG1773185	1	11/12/21 06:31	11/12/21 06:31	BMB	Mt. Juliet, TN

¹Cp

²Tc

³Ss

⁴Cn

⁵Sr

⁶Qc

⁷Gl

⁸Al

⁹Sc

ACCOUNT:

Wood E&I Solutions Inc. - Wilmington, NC

PROJECT:

SDG:

L1427990

DATE/TIME:

11/30/21 16:05

PAGE:


7 of 61

CASE NARRATIVE

All sample aliquots were received at the correct temperature, in the proper containers, with the appropriate preservatives, and within method specified holding times, unless qualified or notated within the report. Where applicable, all MDL (LOD) and RDL (LOQ) values reported for environmental samples have been corrected for the dilution factor used in the analysis. All Method and Batch Quality Control are within established criteria except where addressed in this case narrative, a non-conformance form or properly qualified within the sample results. By my digital signature below, I affirm to the best of my knowledge, all problems/anomalies observed by the laboratory as having the potential to affect the quality of the data have been identified by the laboratory, and no information or data have been knowingly withheld that would affect the quality of the data.

[Preliminary Report]

Heather J Wagner
Project Manager



Total Solids by Method 2540 G-2011

Analyte	Result	Qualifier	Dilution	Analysis date / time	Batch
Total Solids	78.8		1	11/10/2021 16:10	WG1771086

Wet Chemistry by Method 9071B

Analyte	Result (dry)	Qualifier	MDL (dry)	RDL (dry)	Dilution	Analysis date / time	Batch
Oil & Grease (Hexane Extr)	12600		41.9	127	1	11/09/2021 01:42	WG1769339

1Cp

2Tc

3Ss

4Cn

5Sr

6Qc

7Gl

8Al

9Sc

Total Solids by Method 2540 G-2011

Analyte	Result	Qualifier	Dilution	Analysis date / time	Batch
Total Solids	90.6		1	11/10/2021 16:10	WG1771086

Wet Chemistry by Method 9071B

Analyte	Result	Qualifier	MDL	RDL	Dilution	Analysis date / time	Batch
Oil & Grease (Hexane Extr)	20300	V	33.0	100	1	11/09/2021 01:42	WG1769339

¹ Cp² Tc³ Ss⁴ Cn⁵ Sr⁶ Qc⁷ Gl⁸ Al⁹ Sc

Total Solids by Method 2540 G-2011

Analyte	Result	Qualifier	Dilution	Analysis date / time	Batch
Total Solids	92.3		1	11/10/2021 16:10	WG1771086

Wet Chemistry by Method 9071B

Analyte	Result	Qualifier	MDL	RDL	Dilution	Analysis date / time	Batch
Oil & Grease (Hexane Extr)	22600	J3 V	33.0	100	1	11/10/2021 15:38	WG1771465

¹ Cp² Tc³ Ss⁴ Cn⁵ Sr⁶ Qc⁷ Gl⁸ Al⁹ Sc

Total Solids by Method 2540 G-2011

Analyte	Result	Qualifier	Dilution	Analysis date / time	Batch
Total Solids	87.7		1	11/10/2021 16:10	WG1771086

Wet Chemistry by Method 9071B

Analyte	Result (dry) mg/kg	Qualifier	MDL (dry) mg/kg	RDL (dry) mg/kg	Dilution	Analysis date / time	Batch
Oil & Grease (Hexane Extr)	7180		37.6	114	1	11/10/2021 15:38	WG1771465

¹ Cp² Tc³ Ss⁴ Cn⁵ Sr⁶ Qc⁷ Gl⁸ Al⁹ Sc

Total Solids by Method 2540 G-2011

Analyte	Result	Qualifier	Dilution	Analysis date / time	Batch
Total Solids	95.6		1	11/10/2021 16:10	WG1771086

Wet Chemistry by Method 9071B

Analyte	Result (dry) mg/kg	Qualifier	MDL (dry) mg/kg	RDL (dry) mg/kg	Dilution	Analysis date / time	Batch
Oil & Grease (Hexane Extr)	41.7	<u>J</u>	34.5	105	1	11/10/2021 15:38	WG1771465

¹ Cp

² Tc

³ Ss

⁴ Cn

⁵ Sr

⁶ Qc

⁷ Gl

⁸ Al

⁹ Sc

Total Solids by Method 2540 G-2011

Analyte	Result	Qualifier	Dilution	Analysis date / time	Batch
Total Solids	93.0		1	11/10/2021 16:10	WG1771086

Wet Chemistry by Method 9071B

Analyte	Result (dry) mg/kg	Qualifier	MDL (dry) mg/kg	RDL (dry) mg/kg	Dilution	Analysis date / time	Batch
Oil & Grease (Hexane Extr)	168		35.5	107	1	11/10/2021 15:38	WG1771465

1Cp

2Tc

3Ss

4Cn

5Sr

6Qc

7Gl

8Al

9Sc

Total Solids by Method 2540 G-2011

Analyte	Result	Qualifier	Dilution	Analysis date / time	Batch
Total Solids	97.9		1	11/10/2021 17:32	WG1771087

Wet Chemistry by Method 9071B

Analyte	Result (dry) mg/kg	Qualifier	MDL (dry) mg/kg	RDL (dry) mg/kg	Dilution	Analysis date / time	Batch
Oil & Grease (Hexane Extr)	U		33.7	102	1	11/10/2021 15:38	WG1771465

¹ Cp² Tc³ Ss⁴ Cn⁵ Sr⁶ Qc⁷ Gl⁸ Al⁹ Sc

Total Solids by Method 2540 G-2011

Analyte	Result	Qualifier	Dilution	Analysis date / time	Batch
Total Solids	91.5		1	11/10/2021 17:32	WG1771087

Wet Chemistry by Method 9071B

Analyte	Result (dry) mg/kg	Qualifier	MDL (dry) mg/kg	RDL (dry) mg/kg	Dilution	Analysis date / time	Batch
Oil & Grease (Hexane Extr)	152		36.1	109	1	11/10/2021 15:38	WG1771465

1Cp

2Tc

3Ss

4Cn

5Sr

6Qc

7Gl

8Al

9Sc

Total Solids by Method 2540 G-2011

Analyte	Result	Qualifier	Dilution	Analysis date / time	Batch
Total Solids	81.3		1	11/10/2021 17:32	WG1771087

Wet Chemistry by Method 9071B

Analyte	Result (dry) mg/kg	Qualifier	MDL (dry) mg/kg	RDL (dry) mg/kg	Dilution	Analysis date / time	Batch
Oil & Grease (Hexane Extr)	331		40.6	123	1	11/10/2021 15:38	WG1771465

¹Cp

²Tc

³Ss

⁴Cn

⁵Sr

⁶Qc

⁷Gl

⁸Al

⁹Sc

Total Solids by Method 2540 G-2011

Analyte	Result	Qualifier	Dilution	Analysis date / time	Batch
Total Solids	93.6		1	11/10/2021 17:32	WG1771087

Wet Chemistry by Method 9071B

Analyte	Result (dry)	Qualifier	MDL (dry)	RDL (dry)	Dilution	Analysis date / time	Batch
Oil & Grease (Hexane Extr)	31100		35.2	107	1	11/10/2021 15:38	WG1771465

1Cp

2Tc

3Ss

4Cn

5Sr

6Qc

7Gl

8Al

9Sc

Total Solids by Method 2540 G-2011

Analyte	Result	Qualifier	Dilution	Analysis date / time	Batch
Total Solids	98.2		1	11/10/2021 17:32	WG1771087

Wet Chemistry by Method 9045D

Analyte	Result	Qualifier	Dilution	Analysis date / time	Batch
pH	8.82	T8	1	11/09/2021 14:00	WG1771257

Sample Narrative:

L1427990-11 WG1771257: 8.82 at 19.9C

1Cp

2Tc

3Ss

4Cn

5Sr

6Qc

7Gl

8Al

9Sc

Total Solids by Method 2540 G-2011

Analyte	Result	Qualifier	Dilution	Analysis date / time	Batch
Total Solids	97.9		1	11/10/2021 17:32	WG1771087

Wet Chemistry by Method 9045D

Analyte	Result	Qualifier	Dilution	Analysis date / time	Batch
pH	8.40	T8	1	11/09/2021 14:00	WG1771257

Sample Narrative:

L1427990-12 WG1771257: 8.4 at 19.7C

1Cp

2Tc

3Ss

4Cn

5Sr

6Qc

7Gl

8Al

9Sc

Total Solids by Method 2540 G-2011

Analyte	Result	Qualifier	Dilution	Analysis date / time	Batch
Total Solids	96.3		1	11/10/2021 17:32	WG1771087

Wet Chemistry by Method 9045D

Analyte	Result	Qualifier	Dilution	Analysis date / time	Batch
pH	8.66	T8	1	11/09/2021 14:00	WG1771257

Sample Narrative:

L1427990-13 WG1771257: 8.66 at 19.7C

1Cp

2Tc

3Ss

4Cn

5Sr

6Qc

7Gl

8Al

9Sc

Total Solids by Method 2540 G-2011

Analyte	Result	Qualifier	Dilution	Analysis date / time	Batch
Total Solids	11.4		1	11/10/2021 17:32	WG1771087

Wet Chemistry by Method 9045D

Analyte	Result	Qualifier	Dilution	Analysis date / time	Batch
pH	7.06	T8	1	11/09/2021 14:00	WG1771257

Sample Narrative:


L1427990-14 WG1771257: 7.06 at 19.6C

Wet Chemistry by Method 9071B

Analyte	Result (dry)	Qualifier	MDL (dry)	RDL (dry)	Dilution	Analysis date / time	Batch
Oil & Grease (Hexane Extr)	676	J	290	878	1	11/10/2021 15:38	WG1771465


Volatile Organic Compounds (GC/MS) by Method 8260D

Analyte	Result (dry)	Qualifier	MDL (dry)	RDL (dry)	Dilution	Analysis date / time	Batch
Acetone	2.23		0.763	1.05	1.5	11/15/2021 15:27	WG1774458
Acrylonitrile	U		0.0756	0.262	1.5	11/15/2021 15:27	WG1774458
Benzene	0.0514		0.00978	0.0209	1.5	11/15/2021 15:27	WG1774458
Bromobenzene	U		0.0188	0.262	1.5	11/15/2021 15:27	WG1774458
Bromodichloromethane	U		0.0152	0.0523	1.5	11/15/2021 15:27	WG1774458
Bromoform	U		0.0246	0.523	1.5	11/15/2021 15:27	WG1774458
Bromomethane	U		0.0413	0.262	1.5	11/15/2021 15:27	WG1774458
n-Butylbenzene	U		0.110	0.262	1.5	11/15/2021 15:27	WG1774458
sec-Butylbenzene	U		0.0603	0.262	1.5	11/15/2021 15:27	WG1774458
tert-Butylbenzene	U		0.0409	0.105	1.5	11/15/2021 15:27	WG1774458
Carbon tetrachloride	U		0.0188	0.105	1.5	11/15/2021 15:27	WG1774458
Chlorobenzene	U		0.00440	0.0523	1.5	11/15/2021 15:27	WG1774458
Chlorodibromomethane	U		0.0128	0.0523	1.5	11/15/2021 15:27	WG1774458
Chloroethane	U		0.0356	0.105	1.5	11/15/2021 15:27	WG1774458
Chloroform	U		0.0216	0.0523	1.5	11/15/2021 15:27	WG1774458
Chloromethane	U		0.0911	0.262	1.5	11/15/2021 15:27	WG1774458
2-Chlorotoluene	U		0.0181	0.0523	1.5	11/15/2021 15:27	WG1774458
4-Chlorotoluene	U		0.00942	0.105	1.5	11/15/2021 15:27	WG1774458
1,2-Dibromo-3-Chloropropane	U		0.0816	0.523	1.5	11/15/2021 15:27	WG1774458
1,2-Dibromoethane	U		0.0136	0.0523	1.5	11/15/2021 15:27	WG1774458
Dibromomethane	U		0.0158	0.105	1.5	11/15/2021 15:27	WG1774458
1,2-Dichlorobenzene	U		0.00890	0.105	1.5	11/15/2021 15:27	WG1774458
1,3-Dichlorobenzene	U		0.0126	0.105	1.5	11/15/2021 15:27	WG1774458
1,4-Dichlorobenzene	U		0.0147	0.105	1.5	11/15/2021 15:27	WG1774458
Dichlorodifluoromethane	U		0.0338	0.0523	1.5	11/15/2021 15:27	WG1774458
1,1-Dichloroethane	U		0.0103	0.0523	1.5	11/15/2021 15:27	WG1774458
1,2-Dichloroethane	U		0.0136	0.0523	1.5	11/15/2021 15:27	WG1774458
1,1-Dichloroethene	U		0.0127	0.0523	1.5	11/15/2021 15:27	WG1774458
cis-1,2-Dichloroethene	U		0.0153	0.0523	1.5	11/15/2021 15:27	WG1774458
trans-1,2-Dichloroethene	U		0.0218	0.105	1.5	11/15/2021 15:27	WG1774458
1,2-Dichloropropane	0.108		0.0297	0.105	1.5	11/15/2021 15:27	WG1774458
1,1-Dichloropropene	U		0.0169	0.0523	1.5	11/15/2021 15:27	WG1774458
1,3-Dichloropropane	U		0.0105	0.105	1.5	11/15/2021 15:27	WG1774458
cis-1,3-Dichloropropene	U		0.0159	0.0523	1.5	11/15/2021 15:27	WG1774458
trans-1,3-Dichloropropene	U		0.0239	0.105	1.5	11/15/2021 15:27	WG1774458
2,2-Dichloropropane	U		0.0289	0.0523	1.5	11/15/2021 15:27	WG1774458



Volatile Organic Compounds (GC/MS) by Method 8260D

Analyte	Result (dry) mg/kg	Qualifier	MDL (dry) mg/kg	RDL (dry) mg/kg	Dilution	Analysis date / time	Batch
Di-isopropyl ether	U		0.00858	0.0209	1.5	11/15/2021 15:27	WG1774458
Ethylbenzene	0.0424	<u>IJ</u>	0.0155	0.0523	1.5	11/15/2021 15:27	WG1774458
Hexachloro-1,3-butadiene	U		0.126	0.523	1.5	11/15/2021 15:27	WG1774458
Isopropylbenzene	0.0115	<u>IJ</u>	0.00890	0.0523	1.5	11/15/2021 15:27	WG1774458
p-Isopropyltoluene	U		0.0534	0.105	1.5	11/15/2021 15:27	WG1774458
2-Butanone (MEK)	1.59	<u>BJ</u>	1.33	2.09	1.5	11/15/2021 15:27	WG1774458
Methylene Chloride	U		0.139	0.523	1.5	11/15/2021 15:27	WG1774458
4-Methyl-2-pentanone (MIBK)	U		0.0477	0.523	1.5	11/15/2021 15:27	WG1774458
Methyl tert-butyl ether	U		0.00733	0.0209	1.5	11/15/2021 15:27	WG1774458
Naphthalene	U		0.102	0.262	1.5	11/15/2021 15:27	WG1774458
n-Propylbenzene	U		0.0200	0.105	1.5	11/15/2021 15:27	WG1774458
Styrene	0.0115	<u>IJ</u>	0.00479	0.262	1.5	11/15/2021 15:27	WG1774458
1,1,1,2-Tetrachloroethane	U		0.0198	0.0523	1.5	11/15/2021 15:27	WG1774458
1,1,2,2-Tetrachloroethane	U		0.0145	0.0523	1.5	11/15/2021 15:27	WG1774458
1,1,2-Trichlorotrifluoroethane	U		0.0158	0.0523	1.5	11/15/2021 15:27	WG1774458
Tetrachloroethene	U		0.0187	0.0523	1.5	11/15/2021 15:27	WG1774458
Toluene	0.111		0.0272	0.105	1.5	11/15/2021 15:27	WG1774458
1,2,3-Trichlorobenzene	U	<u>C4</u>	0.153	0.262	1.5	11/15/2021 15:27	WG1774458
1,2,4-Trichlorobenzene	U		0.0921	0.262	1.5	11/15/2021 15:27	WG1774458
1,1,1-Trichloroethane	U		0.0193	0.0523	1.5	11/15/2021 15:27	WG1774458
1,1,2-Trichloroethane	U		0.0125	0.0523	1.5	11/15/2021 15:27	WG1774458
Trichloroethene	U		0.0122	0.0209	1.5	11/15/2021 15:27	WG1774458
Trichlorofluoromethane	1.86		0.0173	0.0523	1.5	11/15/2021 15:27	WG1774458
1,2,3-Trichloropropane	U		0.0339	0.262	1.5	11/15/2021 15:27	WG1774458
1,2,4-Trimethylbenzene	0.0382	<u>IJ</u>	0.0331	0.105	1.5	11/15/2021 15:27	WG1774458
1,2,3-Trimethylbenzene	U		0.0331	0.105	1.5	11/15/2021 15:27	WG1774458
1,3,5-Trimethylbenzene	0.0445	<u>IJ</u>	0.0419	0.105	1.5	11/15/2021 15:27	WG1774458
Vinyl chloride	U		0.0243	0.0523	1.5	11/15/2021 15:27	WG1774458
Xylenes, Total	0.103	<u>IJ</u>	0.0184	0.136	1.5	11/15/2021 15:27	WG1774458
(S) Toluene-d8	115			75.0-131		11/15/2021 15:27	WG1774458
(S) 4-Bromofluorobenzene	106			67.0-138		11/15/2021 15:27	WG1774458
(S) 1,2-Dichloroethane-d4	97.2			70.0-130		11/15/2021 15:27	WG1774458



Polychlorinated Biphenyls (GC) by Method 8082 A

Analyte	Result (dry) mg/kg	Qualifier	MDL (dry) mg/kg	RDL (dry) mg/kg	Dilution	Analysis date / time	Batch
PCB 1016	U		0.104	0.298	1	11/16/2021 20:46	WG1772854
PCB 1221	U		0.104	0.298	1	11/16/2021 20:46	WG1772854
PCB 1232	U		0.104	0.298	1	11/16/2021 20:46	WG1772854
PCB 1242	U		0.104	0.298	1	11/16/2021 20:46	WG1772854
PCB 1248	U		0.0648	0.149	1	11/16/2021 20:46	WG1772854
PCB 1254	U		0.0648	0.149	1	11/16/2021 20:46	WG1772854
PCB 1260	U		0.0648	0.149	1	11/16/2021 20:46	WG1772854
(S) Decachlorobiphenyl	66.3			10.0-135		11/16/2021 20:46	WG1772854
(S) Tetrachloro-m-xylene	79.8			10.0-139		11/16/2021 20:46	WG1772854

Total Solids by Method 2540 G-2011

Analyte	Result	Qualifier	Dilution	Analysis	Batch
	%			date / time	
Total Solids	3.54		1	11/10/2021 17:32	WG1771087

Wet Chemistry by Method 9045D

Analyte	Result	Qualifier	Dilution	Analysis	Batch
	su			date / time	
pH	6.81	T8	1	11/09/2021 14:00	WG1771257

Sample Narrative:

L1427990-16 WG1771257: 6.81 at 19.4C

Wet Chemistry by Method 9071B

Analyte	Result (dry)	Qualifier	MDL (dry)	RDL (dry)	Dilution	Analysis	Batch
	mg/kg		mg/kg	mg/kg		date / time	
Oil & Grease (Hexane Extr)	U		932	2820	1	11/10/2021 15:38	WG1771465

Volatile Organic Compounds (GC/MS) by Method 8260D

Analyte	Result (dry)	Qualifier	MDL (dry)	RDL (dry)	Dilution	Analysis	Batch
	mg/kg		mg/kg	mg/kg		date / time	
Acetone	U		2.42	3.31	1.38	11/15/2021 15:46	WG1774458
Acrylonitrile	U		0.239	0.830	1.38	11/15/2021 15:46	WG1774458
Benzene	U		0.0309	0.0662	1.38	11/15/2021 15:46	WG1774458
Bromobenzene	U		0.0595	0.830	1.38	11/15/2021 15:46	WG1774458
Bromodichloromethane	U		0.0479	0.165	1.38	11/15/2021 15:46	WG1774458
Bromoform	U		0.0772	1.65	1.38	11/15/2021 15:46	WG1774458
Bromomethane	U		0.130	0.830	1.38	11/15/2021 15:46	WG1774458
n-Butylbenzene	U		0.348	0.830	1.38	11/15/2021 15:46	WG1774458
sec-Butylbenzene	U		0.190	0.830	1.38	11/15/2021 15:46	WG1774458
tert-Butylbenzene	U		0.129	0.331	1.38	11/15/2021 15:46	WG1774458
Carbon tetrachloride	U		0.0595	0.331	1.38	11/15/2021 15:46	WG1774458
Chlorobenzene	U		0.0139	0.165	1.38	11/15/2021 15:46	WG1774458
Chlorodibromomethane	U		0.0405	0.165	1.38	11/15/2021 15:46	WG1774458
Chloroethane	U		0.113	0.331	1.38	11/15/2021 15:46	WG1774458
Chloroform	U		0.0681	0.165	1.38	11/15/2021 15:46	WG1774458
Chloromethane	U		0.288	0.830	1.38	11/15/2021 15:46	WG1774458
2-Chlorotoluene	U		0.0571	0.165	1.38	11/15/2021 15:46	WG1774458
4-Chlorotoluene	U		0.0298	0.331	1.38	11/15/2021 15:46	WG1774458
1,2-Dibromo-3-Chloropropane	U		0.258	1.65	1.38	11/15/2021 15:46	WG1774458
1,2-Dibromoethane	U		0.0429	0.165	1.38	11/15/2021 15:46	WG1774458
Dibromomethane	U		0.0499	0.331	1.38	11/15/2021 15:46	WG1774458
1,2-Dichlorobenzene	U		0.0281	0.331	1.38	11/15/2021 15:46	WG1774458
1,3-Dichlorobenzene	U		0.0397	0.331	1.38	11/15/2021 15:46	WG1774458
1,4-Dichlorobenzene	U		0.0463	0.331	1.38	11/15/2021 15:46	WG1774458
Dichlorodifluoromethane	U		0.106	0.165	1.38	11/15/2021 15:46	WG1774458
1,1-Dichloroethane	U		0.0325	0.165	1.38	11/15/2021 15:46	WG1774458
1,2-Dichloroethane	U		0.0430	0.165	1.38	11/15/2021 15:46	WG1774458
1,1-Dichloroethene	U		0.0401	0.165	1.38	11/15/2021 15:46	WG1774458
cis-1,2-Dichloroethene	U		0.0484	0.165	1.38	11/15/2021 15:46	WG1774458
trans-1,2-Dichloroethene	U		0.0690	0.331	1.38	11/15/2021 15:46	WG1774458
1,2-Dichloropropane	U		0.0940	0.331	1.38	11/15/2021 15:46	WG1774458
1,1-Dichloropropene	U		0.0537	0.165	1.38	11/15/2021 15:46	WG1774458
1,3-Dichloropropane	U		0.0331	0.331	1.38	11/15/2021 15:46	WG1774458
cis-1,3-Dichloropropene	U		0.0499	0.165	1.38	11/15/2021 15:46	WG1774458
trans-1,3-Dichloropropene	U		0.0753	0.331	1.38	11/15/2021 15:46	WG1774458
2,2-Dichloropropane	U		0.0911	0.165	1.38	11/15/2021 15:46	WG1774458

1 Cp

2 Tc

3 Ss

4 Cn

5 Sr

6 Qc


7 Gl

8 Al

9 Sc

Volatile Organic Compounds (GC/MS) by Method 8260D

Analyte	Result (dry) mg/kg	Qualifier	MDL (dry) mg/kg	RDL (dry) mg/kg	Dilution	Analysis date / time	Batch
Di-isopropyl ether	U		0.0271	0.0662	1.38	11/15/2021 15:46	WG1774458
Ethylbenzene	U		0.0489	0.165	1.38	11/15/2021 15:46	WG1774458
Hexachloro-1,3-butadiene	U		0.397	1.65	1.38	11/15/2021 15:46	WG1774458
Isopropylbenzene	U		0.0281	0.165	1.38	11/15/2021 15:46	WG1774458
p-Isopropyltoluene	U		0.169	0.331	1.38	11/15/2021 15:46	WG1774458
2-Butanone (MEK)	U		4.20	6.62	1.38	11/15/2021 15:46	WG1774458
Methylene Chloride	U		0.439	1.65	1.38	11/15/2021 15:46	WG1774458
4-Methyl-2-pentanone (MIBK)	U		0.151	1.65	1.38	11/15/2021 15:46	WG1774458
Methyl tert-butyl ether	U		0.0232	0.0662	1.38	11/15/2021 15:46	WG1774458
Naphthalene	U		0.323	0.830	1.38	11/15/2021 15:46	WG1774458
n-Propylbenzene	U		0.0628	0.331	1.38	11/15/2021 15:46	WG1774458
Styrene	U		0.0152	0.830	1.38	11/15/2021 15:46	WG1774458
1,1,1,2-Tetrachloroethane	U		0.0628	0.165	1.38	11/15/2021 15:46	WG1774458
1,1,2,2-Tetrachloroethane	U		0.0460	0.165	1.38	11/15/2021 15:46	WG1774458
1,1,2-Trichlorotrifluoroethane	U		0.0499	0.165	1.38	11/15/2021 15:46	WG1774458
Tetrachloroethene	U		0.0595	0.165	1.38	11/15/2021 15:46	WG1774458
Toluene	0.103	U	0.0858	0.331	1.38	11/15/2021 15:46	WG1774458
1,2,3-Trichlorobenzene	U	C4	0.484	0.830	1.38	11/15/2021 15:46	WG1774458
1,2,4-Trichlorobenzene	U		0.291	0.830	1.38	11/15/2021 15:46	WG1774458
1,1,1-Trichloroethane	U		0.0609	0.165	1.38	11/15/2021 15:46	WG1774458
1,1,2-Trichloroethane	U		0.0395	0.165	1.38	11/15/2021 15:46	WG1774458
Trichloroethene	U		0.0386	0.0662	1.38	11/15/2021 15:46	WG1774458
Trichlorofluoromethane	U		0.0547	0.165	1.38	11/15/2021 15:46	WG1774458
1,2,3-Trichloropropane	U		0.107	0.830	1.38	11/15/2021 15:46	WG1774458
1,2,4-Trimethylbenzene	U		0.105	0.331	1.38	11/15/2021 15:46	WG1774458
1,2,3-Trimethylbenzene	U		0.105	0.331	1.38	11/15/2021 15:46	WG1774458
1,3,5-Trimethylbenzene	U		0.132	0.331	1.38	11/15/2021 15:46	WG1774458
Vinyl chloride	U		0.0767	0.165	1.38	11/15/2021 15:46	WG1774458
Xylenes, Total	0.0796	U	0.0580	0.430	1.38	11/15/2021 15:46	WG1774458
(S) Toluene-d8	114			75.0-131		11/15/2021 15:46	WG1774458
(S) 4-Bromofluorobenzene	104			67.0-138		11/15/2021 15:46	WG1774458
(S) 1,2-Dichloroethane-d4	95.3			70.0-130		11/15/2021 15:46	WG1774458



Polychlorinated Biphenyls (GC) by Method 8082 A

Analyte	Result (dry) mg/kg	Qualifier	MDL (dry) mg/kg	RDL (dry) mg/kg	Dilution	Analysis date / time	Batch
PCB 1016	U		0.333	0.960	1	11/16/2021 20:56	WG1772854
PCB 1221	U		0.333	0.960	1	11/16/2021 20:56	WG1772854
PCB 1232	U		0.333	0.960	1	11/16/2021 20:56	WG1772854
PCB 1242	U		0.333	0.960	1	11/16/2021 20:56	WG1772854
PCB 1248	U		0.208	0.480	1	11/16/2021 20:56	WG1772854
PCB 1254	U		0.208	0.480	1	11/16/2021 20:56	WG1772854
PCB 1260	U		0.208	0.480	1	11/16/2021 20:56	WG1772854
(S) Decachlorobiphenyl	70.0			10.0-135		11/16/2021 20:56	WG1772854
(S) Tetrachloro-m-xylene	89.0			10.0-139		11/16/2021 20:56	WG1772854

Total Solids by Method 2540 G-2011

Analyte	Result	Qualifier	Dilution	Analysis	Batch
	%			date / time	
Total Solids	24.0		1	11/10/2021 17:32	WG1771087

Wet Chemistry by Method 9045D

Analyte	Result	Qualifier	Dilution	Analysis	Batch
	su			date / time	
pH	7.51	T8	1	11/09/2021 14:00	WG1771257

Sample Narrative:

L1427990-18 WG1771257: 7.51 at 19.3C

Wet Chemistry by Method 9071B

Analyte	Result (dry)	Qualifier	MDL (dry)	RDL (dry)	Dilution	Analysis	Batch
	mg/kg		mg/kg	mg/kg		date / time	
Oil & Grease (Hexane Extr)	659		138	417	1	11/10/2021 15:38	WG1771465

Volatile Organic Compounds (GC/MS) by Method 8260D

Analyte	Result (dry)	Qualifier	MDL (dry)	RDL (dry)	Dilution	Analysis	Batch
	mg/kg		mg/kg	mg/kg		date / time	
Acetone	U		0.317	0.434	1.32	11/10/2021 13:19	WG1771934
Acrylonitrile	U		0.0314	0.108	1.32	11/10/2021 13:19	WG1771934
Benzene	0.0684		0.00405	0.00868	1.32	11/10/2021 13:19	WG1771934
Bromobenzene	U		0.00782	0.108	1.32	11/10/2021 13:19	WG1771934
Bromodichloromethane	U		0.00629	0.0217	1.32	11/10/2021 13:19	WG1771934
Bromoform	U	C3	0.0101	0.217	1.32	11/10/2021 13:19	WG1771934
Bromomethane	U		0.0171	0.108	1.32	11/10/2021 13:19	WG1771934
n-Butylbenzene	U		0.0456	0.108	1.32	11/10/2021 13:19	WG1771934
sec-Butylbenzene	U		0.0250	0.108	1.32	11/10/2021 13:19	WG1771934
tert-Butylbenzene	U		0.0169	0.0434	1.32	11/10/2021 13:19	WG1771934
Carbon tetrachloride	U		0.00782	0.0434	1.32	11/10/2021 13:19	WG1771934
Chlorobenzene	U		0.00182	0.0217	1.32	11/10/2021 13:19	WG1771934
Chlorodibromomethane	U		0.00531	0.0217	1.32	11/10/2021 13:19	WG1771934
Chloroethane	U		0.0147	0.0434	1.32	11/10/2021 13:19	WG1771934
Chloroform	U		0.00894	0.0217	1.32	11/10/2021 13:19	WG1771934
Chloromethane	U		0.0377	0.108	1.32	11/10/2021 13:19	WG1771934
2-Chlorotoluene	U		0.00749	0.0217	1.32	11/10/2021 13:19	WG1771934
4-Chlorotoluene	U		0.00390	0.0434	1.32	11/10/2021 13:19	WG1771934
1,2-Dibromo-3-Chloropropane	U		0.0339	0.217	1.32	11/10/2021 13:19	WG1771934
1,2-Dibromoethane	U		0.00562	0.0217	1.32	11/10/2021 13:19	WG1771934
Dibromomethane	U		0.00651	0.0434	1.32	11/10/2021 13:19	WG1771934
1,2-Dichlorobenzene	U		0.00369	0.0434	1.32	11/10/2021 13:19	WG1771934
1,3-Dichlorobenzene	U		0.00521	0.0434	1.32	11/10/2021 13:19	WG1771934
1,4-Dichlorobenzene	U		0.00607	0.0434	1.32	11/10/2021 13:19	WG1771934
Dichlorodifluoromethane	U		0.0140	0.0217	1.32	11/10/2021 13:19	WG1771934
1,1-Dichloroethane	U		0.00426	0.0217	1.32	11/10/2021 13:19	WG1771934
1,2-Dichloroethane	U		0.00563	0.0217	1.32	11/10/2021 13:19	WG1771934
1,1-Dichloroethene	U		0.00526	0.0217	1.32	11/10/2021 13:19	WG1771934
cis-1,2-Dichloroethene	U		0.00637	0.0217	1.32	11/10/2021 13:19	WG1771934
trans-1,2-Dichloroethene	U		0.00901	0.0434	1.32	11/10/2021 13:19	WG1771934
1,2-Dichloropropane	U		0.0123	0.0434	1.32	11/10/2021 13:19	WG1771934
1,1-Dichloropropene	U		0.00703	0.0217	1.32	11/10/2021 13:19	WG1771934
1,3-Dichloropropane	U		0.00434	0.0434	1.32	11/10/2021 13:19	WG1771934
cis-1,3-Dichloropropene	U		0.00657	0.0217	1.32	11/10/2021 13:19	WG1771934
trans-1,3-Dichloropropene	U		0.00986	0.0434	1.32	11/10/2021 13:19	WG1771934
2,2-Dichloropropane	U		0.0120	0.0217	1.32	11/10/2021 13:19	WG1771934

1 Cp

2 Tc

3 Ss

4 Cn

5 Sr

6 Qc

7 Gl

8 Al

9 Sc

Volatile Organic Compounds (GC/MS) by Method 8260D

Analyte	Result (dry) mg/kg	Qualifier	MDL (dry) mg/kg	RDL (dry) mg/kg	Dilution	Analysis date / time	Batch
Di-isopropyl ether	U		0.00356	0.00868	1.32	11/10/2021 13:19	WG1771934
Ethylbenzene	0.0467		0.00640	0.0217	1.32	11/10/2021 13:19	WG1771934
Hexachloro-1,3-butadiene	U		0.0521	0.217	1.32	11/10/2021 13:19	WG1771934
Isopropylbenzene	U		0.00369	0.0217	1.32	11/10/2021 13:19	WG1771934
p-Isopropyltoluene	U		0.0222	0.0434	1.32	11/10/2021 13:19	WG1771934
2-Butanone (MEK)	U		0.551	0.868	1.32	11/10/2021 13:19	WG1771934
Methylene Chloride	U		0.0576	0.217	1.32	11/10/2021 13:19	WG1771934
4-Methyl-2-pentanone (MIBK)	0.0562	1U	0.0198	0.217	1.32	11/10/2021 13:19	WG1771934
Methyl tert-butyl ether	U		0.00304	0.00868	1.32	11/10/2021 13:19	WG1771934
Naphthalene	U		0.0423	0.108	1.32	11/10/2021 13:19	WG1771934
n-Propylbenzene	U		0.00822	0.0434	1.32	11/10/2021 13:19	WG1771934
Styrene	0.0165	1U	0.00199	0.108	1.32	11/10/2021 13:19	WG1771934
1,1,1,2-Tetrachloroethane	U		0.00822	0.0217	1.32	11/10/2021 13:19	WG1771934
1,1,2,2-Tetrachloroethane	U		0.00603	0.0217	1.32	11/10/2021 13:19	WG1771934
1,1,2-Trichlorotrifluoroethane	U		0.00654	0.0217	1.32	11/10/2021 13:19	WG1771934
Tetrachloroethene	U		0.00776	0.0217	1.32	11/10/2021 13:19	WG1771934
Toluene	1.76		0.0113	0.0434	1.32	11/10/2021 13:19	WG1771934
1,2,3-Trichlorobenzene	U		0.0636	0.108	1.32	11/10/2021 13:19	WG1771934
1,2,4-Trichlorobenzene	U		0.0382	0.108	1.32	11/10/2021 13:19	WG1771934
1,1,1-Trichloroethane	U		0.00802	0.0217	1.32	11/10/2021 13:19	WG1771934
1,1,2-Trichloroethane	U		0.00518	0.0217	1.32	11/10/2021 13:19	WG1771934
Trichloroethene	0.00887		0.00507	0.00868	1.32	11/10/2021 13:19	WG1771934
Trichlorofluoromethane	U		0.00716	0.0217	1.32	11/10/2021 13:19	WG1771934
1,2,3-Trichloropropane	U		0.0141	0.108	1.32	11/10/2021 13:19	WG1771934
1,2,4-Trimethylbenzene	0.0215	1U	0.0137	0.0434	1.32	11/10/2021 13:19	WG1771934
1,2,3-Trimethylbenzene	U		0.0137	0.0434	1.32	11/10/2021 13:19	WG1771934
1,3,5-Trimethylbenzene	0.388		0.0174	0.0434	1.32	11/10/2021 13:19	WG1771934
Vinyl chloride	U		0.0101	0.0217	1.32	11/10/2021 13:19	WG1771934
Xylenes, Total	0.0789		0.00762	0.0564	1.32	11/10/2021 13:19	WG1771934
(S) Toluene-d8	110			75.0-131		11/10/2021 13:19	WG1771934
(S) 4-Bromofluorobenzene	91.4			67.0-138		11/10/2021 13:19	WG1771934
(S) 1,2-Dichloroethane-d4	97.9			70.0-130		11/10/2021 13:19	WG1771934

1 Cp
2 Tc
3 Ss
4 Cn
5 Sr
6 Qc
7 Gl
8 Al
9 Sc

Polychlorinated Biphenyls (GC) by Method 8082 A

Analyte	Result (dry) mg/kg	Qualifier	MDL (dry) mg/kg	RDL (dry) mg/kg	Dilution	Analysis date / time	Batch
PCB 1016	U		0.0492	0.142	1	11/17/2021 20:37	WG1772854
PCB 1221	U		0.0492	0.142	1	11/17/2021 20:37	WG1772854
PCB 1232	U		0.0492	0.142	1	11/17/2021 20:37	WG1772854
PCB 1242	U		0.0492	0.142	1	11/17/2021 20:37	WG1772854
PCB 1248	U		0.0308	0.0709	1	11/17/2021 20:37	WG1772854
PCB 1254	U		0.0308	0.0709	1	11/17/2021 20:37	WG1772854
PCB 1260	U		0.0308	0.0709	1	11/17/2021 20:37	WG1772854
(S) Decachlorobiphenyl	68.0			10.0-135		11/17/2021 20:37	WG1772854
(S) Tetrachloro-m-xylene	73.9			10.0-139		11/17/2021 20:37	WG1772854

Total Solids by Method 2540 G-2011

Analyte	Result	Qualifier	Dilution	Analysis	Batch
	%			date / time	
Total Solids	17.2		1	11/10/2021 13:28	WG1771166

Wet Chemistry by Method 9045D

Analyte	Result	Qualifier	Dilution	Analysis	Batch
	su			date / time	
pH	7.07	<u>T8</u>	1	11/09/2021 14:00	WG1771257

Sample Narrative:


L1427990-20 WG1771257: 7.07 at 19.2C

Wet Chemistry by Method 9071B

Analyte	Result (dry)	Qualifier	MDL (dry)	RDL (dry)	Dilution	Analysis	Batch
	mg/kg		mg/kg	mg/kg		date / time	
Oil & Grease (Hexane Extr)	1190		196	595	1	11/10/2021 16:23	WG1771465

Volatile Organic Compounds (GC/MS) by Method 8260D

Analyte	Result (dry)	Qualifier	MDL (dry)	RDL (dry)	Dilution	Analysis	Batch
	mg/kg		mg/kg	mg/kg		date / time	
Acetone	0.498	<u>J</u>	0.405	0.554	1.07	11/15/2021 16:05	WG1774458
Acrylonitrile	U		0.0400	0.139	1.07	11/15/2021 16:05	WG1774458
Benzene	U		0.00518	0.0111	1.07	11/15/2021 16:05	WG1774458
Bromobenzene	U		0.00997	0.139	1.07	11/15/2021 16:05	WG1774458
Bromodichloromethane	U		0.00803	0.0277	1.07	11/15/2021 16:05	WG1774458
Bromoform	U		0.0129	0.277	1.07	11/15/2021 16:05	WG1774458
Bromomethane	U		0.0218	0.139	1.07	11/15/2021 16:05	WG1774458
n-Butylbenzene	U		0.0582	0.139	1.07	11/15/2021 16:05	WG1774458
sec-Butylbenzene	U		0.0319	0.139	1.07	11/15/2021 16:05	WG1774458
tert-Butylbenzene	U		0.0216	0.0554	1.07	11/15/2021 16:05	WG1774458
Carbon tetrachloride	U		0.00995	0.0554	1.07	11/15/2021 16:05	WG1774458
Chlorobenzene	U		0.00233	0.0277	1.07	11/15/2021 16:05	WG1774458
Chlorodibromomethane	U		0.00678	0.0277	1.07	11/15/2021 16:05	WG1774458
Chloroethane	U		0.0188	0.0554	1.07	11/15/2021 16:05	WG1774458
Chloroform	U		0.0114	0.0277	1.07	11/15/2021 16:05	WG1774458
Chloromethane	U		0.0481	0.139	1.07	11/15/2021 16:05	WG1774458
2-Chlorotoluene	U		0.00959	0.0277	1.07	11/15/2021 16:05	WG1774458
4-Chlorotoluene	U		0.00498	0.0554	1.07	11/15/2021 16:05	WG1774458
1,2-Dibromo-3-Chloropropane	U		0.0432	0.277	1.07	11/15/2021 16:05	WG1774458
1,2-Dibromoethane	U		0.00717	0.0277	1.07	11/15/2021 16:05	WG1774458
Dibromomethane	U		0.00831	0.0554	1.07	11/15/2021 16:05	WG1774458
1,2-Dichlorobenzene	U		0.00471	0.0554	1.07	11/15/2021 16:05	WG1774458
1,3-Dichlorobenzene	U		0.00665	0.0554	1.07	11/15/2021 16:05	WG1774458
1,4-Dichlorobenzene	U		0.00775	0.0554	1.07	11/15/2021 16:05	WG1774458
Dichlorodifluoromethane	U		0.0178	0.0277	1.07	11/15/2021 16:05	WG1774458
1,1-Dichloroethane	U		0.00544	0.0277	1.07	11/15/2021 16:05	WG1774458
1,2-Dichloroethane	U		0.00719	0.0277	1.07	11/15/2021 16:05	WG1774458
1,1-Dichloroethene	U		0.00671	0.0277	1.07	11/15/2021 16:05	WG1774458
cis-1,2-Dichloroethene	U		0.00813	0.0277	1.07	11/15/2021 16:05	WG1774458
trans-1,2-Dichloroethene	U		0.0115	0.0554	1.07	11/15/2021 16:05	WG1774458
1,2-Dichloropropane	U		0.0157	0.0554	1.07	11/15/2021 16:05	WG1774458
1,1-Dichloropropene	U		0.00897	0.0277	1.07	11/15/2021 16:05	WG1774458
1,3-Dichloropropane	U		0.00555	0.0554	1.07	11/15/2021 16:05	WG1774458
cis-1,3-Dichloropropene	U		0.00839	0.0277	1.07	11/15/2021 16:05	WG1774458
trans-1,3-Dichloropropene	U		0.0126	0.0554	1.07	11/15/2021 16:05	WG1774458
2,2-Dichloropropane	U		0.0153	0.0277	1.07	11/15/2021 16:05	WG1774458



Volatile Organic Compounds (GC/MS) by Method 8260D

Analyte	Result (dry) mg/kg	Qualifier	MDL (dry) mg/kg	RDL (dry) mg/kg	Dilution	Analysis date / time	Batch
Di-isopropyl ether	U		0.00455	0.0111	1.07	11/15/2021 16:05	WG1774458
Ethylbenzene	0.00858	U	0.00817	0.0277	1.07	11/15/2021 16:05	WG1774458
Hexachloro-1,3-butadiene	U		0.0665	0.277	1.07	11/15/2021 16:05	WG1774458
Isopropylbenzene	U		0.00471	0.0277	1.07	11/15/2021 16:05	WG1774458
p-Isopropyltoluene	U		0.0283	0.0554	1.07	11/15/2021 16:05	WG1774458
2-Butanone (MEK)	U		0.703	1.11	1.07	11/15/2021 16:05	WG1774458
Methylene Chloride	U		0.0735	0.277	1.07	11/15/2021 16:05	WG1774458
4-Methyl-2-pentanone (MIBK)	U		0.0253	0.277	1.07	11/15/2021 16:05	WG1774458
Methyl tert-butyl ether	U		0.00387	0.0111	1.07	11/15/2021 16:05	WG1774458
Naphthalene	U		0.0540	0.139	1.07	11/15/2021 16:05	WG1774458
n-Propylbenzene	U		0.0106	0.0554	1.07	11/15/2021 16:05	WG1774458
Styrene	0.00721	U	0.00254	0.139	1.07	11/15/2021 16:05	WG1774458
1,1,1,2-Tetrachloroethane	U		0.0105	0.0277	1.07	11/15/2021 16:05	WG1774458
1,1,2,2-Tetrachloroethane	U		0.00770	0.0277	1.07	11/15/2021 16:05	WG1774458
1,1,2-Trichlorotrifluoroethane	U		0.00836	0.0277	1.07	11/15/2021 16:05	WG1774458
Tetrachloroethene	U		0.00993	0.0277	1.07	11/15/2021 16:05	WG1774458
Toluene	0.0216	U	0.0144	0.0554	1.07	11/15/2021 16:05	WG1774458
1,2,3-Trichlorobenzene	U	C4	0.0812	0.139	1.07	11/15/2021 16:05	WG1774458
1,2,4-Trichlorobenzene	U		0.0488	0.139	1.07	11/15/2021 16:05	WG1774458
1,1,1-Trichloroethane	U		0.0102	0.0277	1.07	11/15/2021 16:05	WG1774458
1,1,2-Trichloroethane	U		0.00662	0.0277	1.07	11/15/2021 16:05	WG1774458
Trichloroethene	U		0.00647	0.0111	1.07	11/15/2021 16:05	WG1774458
Trichlorofluoromethane	U		0.00916	0.0277	1.07	11/15/2021 16:05	WG1774458
1,2,3-Trichloropropane	U		0.0179	0.139	1.07	11/15/2021 16:05	WG1774458
1,2,4-Trimethylbenzene	U		0.0175	0.0554	1.07	11/15/2021 16:05	WG1774458
1,2,3-Trimethylbenzene	U		0.0175	0.0554	1.07	11/15/2021 16:05	WG1774458
1,3,5-Trimethylbenzene	U		0.0222	0.0554	1.07	11/15/2021 16:05	WG1774458
Vinyl chloride	U		0.0128	0.0277	1.07	11/15/2021 16:05	WG1774458
Xylenes, Total	0.0149	U	0.00975	0.0721	1.07	11/15/2021 16:05	WG1774458
(S) Toluene-d8	116			75.0-131		11/15/2021 16:05	WG1774458
(S) 4-Bromofluorobenzene	104			67.0-138		11/15/2021 16:05	WG1774458
(S) 1,2-Dichloroethane-d4	93.7			70.0-130		11/15/2021 16:05	WG1774458

Polychlorinated Biphenyls (GC) by Method 8082 A

Analyte	Result (dry) mg/kg	Qualifier	MDL (dry) mg/kg	RDL (dry) mg/kg	Dilution	Analysis date / time	Batch
PCB 1016	U		0.0688	0.198	1	11/16/2021 21:15	WG1772854
PCB 1221	U		0.0688	0.198	1	11/16/2021 21:15	WG1772854
PCB 1232	U		0.0688	0.198	1	11/16/2021 21:15	WG1772854
PCB 1242	U		0.0688	0.198	1	11/16/2021 21:15	WG1772854
PCB 1248	U		0.0430	0.0991	1	11/16/2021 21:15	WG1772854
PCB 1254	U		0.0430	0.0991	1	11/16/2021 21:15	WG1772854
PCB 1260	U		0.0430	0.0991	1	11/16/2021 21:15	WG1772854
(S) Decachlorobiphenyl	71.1			10.0-135		11/16/2021 21:15	WG1772854
(S) Tetrachloro-m-xylene	83.0			10.0-139		11/16/2021 21:15	WG1772854

1 Cp

2 Tc

3 Ss

4 Cn

5 Sr

6 Qc

7 Gl

8 Al

9 Sc

Total Solids by Method 2540 G-2011

Analyte	Result	Qualifier	Dilution	Analysis date / time	Batch
Total Solids	17.6		1	11/10/2021 13:28	WG1771166

Wet Chemistry by Method 9045D

Analyte	Result	Qualifier	Dilution	Analysis date / time	Batch
pH	7.39	T8	1	11/09/2021 14:00	WG1771257

Sample Narrative:

L1427990-22 WG1771257: 7.39 at 19.1C

Wet Chemistry by Method 9071B

Analyte	Result (dry)	Qualifier	MDL (dry)	RDL (dry)	Dilution	Analysis date / time	Batch
Oil & Grease (Hexane Extr)	1460		187	567	1	11/10/2021 16:23	WG1771465

Volatile Organic Compounds (GC/MS) by Method 8260D

Analyte	Result (dry)	Qualifier	MDL (dry)	RDL (dry)	Dilution	Analysis date / time	Batch
Acetone	U		0.444	0.608	1.32	11/10/2021 13:38	WG1771934
Acrylonitrile	U		0.0439	0.152	1.32	11/10/2021 13:38	WG1771934
Benzene	0.0206		0.00567	0.0122	1.32	11/10/2021 13:38	WG1771934
Bromobenzene	U		0.0110	0.152	1.32	11/10/2021 13:38	WG1771934
Bromodichloromethane	U		0.00881	0.0304	1.32	11/10/2021 13:38	WG1771934
Bromoform	U	C3	0.0142	0.304	1.32	11/10/2021 13:38	WG1771934
Bromomethane	U		0.0239	0.152	1.32	11/10/2021 13:38	WG1771934
n-Butylbenzene	U		0.0638	0.152	1.32	11/10/2021 13:38	WG1771934
sec-Butylbenzene	U		0.0350	0.152	1.32	11/10/2021 13:38	WG1771934
tert-Butylbenzene	U		0.0237	0.0608	1.32	11/10/2021 13:38	WG1771934
Carbon tetrachloride	U		0.0110	0.0608	1.32	11/10/2021 13:38	WG1771934
Chlorobenzene	U		0.00255	0.0304	1.32	11/10/2021 13:38	WG1771934
Chlorodibromomethane	U		0.00744	0.0304	1.32	11/10/2021 13:38	WG1771934
Chloroethane	U		0.0206	0.0608	1.32	11/10/2021 13:38	WG1771934
Chloroform	U		0.0125	0.0304	1.32	11/10/2021 13:38	WG1771934
Chloromethane	U		0.0529	0.152	1.32	11/10/2021 13:38	WG1771934
2-Chlorotoluene	U		0.0105	0.0304	1.32	11/10/2021 13:38	WG1771934
4-Chlorotoluene	U		0.00547	0.0608	1.32	11/10/2021 13:38	WG1771934
1,2-Dibromo-3-Chloropropane	U		0.0474	0.304	1.32	11/10/2021 13:38	WG1771934
1,2-Dibromoethane	U		0.00787	0.0304	1.32	11/10/2021 13:38	WG1771934
Dibromomethane	U		0.00912	0.0608	1.32	11/10/2021 13:38	WG1771934
1,2-Dichlorobenzene	U		0.00517	0.0608	1.32	11/10/2021 13:38	WG1771934
1,3-Dichlorobenzene	U		0.00729	0.0608	1.32	11/10/2021 13:38	WG1771934
1,4-Dichlorobenzene	U		0.00851	0.0608	1.32	11/10/2021 13:38	WG1771934
Dichlorodifluoromethane	U		0.0196	0.0304	1.32	11/10/2021 13:38	WG1771934
1,1-Dichloroethane	U		0.00597	0.0304	1.32	11/10/2021 13:38	WG1771934
1,2-Dichloroethane	U		0.00789	0.0304	1.32	11/10/2021 13:38	WG1771934
1,1-Dichloroethene	U		0.00737	0.0304	1.32	11/10/2021 13:38	WG1771934
cis-1,2-Dichloroethene	U		0.00892	0.0304	1.32	11/10/2021 13:38	WG1771934
trans-1,2-Dichloroethene	U		0.0126	0.0608	1.32	11/10/2021 13:38	WG1771934
1,2-Dichloropropane	U		0.0172	0.0608	1.32	11/10/2021 13:38	WG1771934
1,1-Dichloropropene	U		0.00985	0.0304	1.32	11/10/2021 13:38	WG1771934
1,3-Dichloropropane	U		0.00609	0.0608	1.32	11/10/2021 13:38	WG1771934
cis-1,3-Dichloropropene	U		0.00920	0.0304	1.32	11/10/2021 13:38	WG1771934
trans-1,3-Dichloropropene	U		0.0138	0.0608	1.32	11/10/2021 13:38	WG1771934
2,2-Dichloropropane	U		0.0168	0.0304	1.32	11/10/2021 13:38	WG1771934

1 Cp

2 Tc

3 Ss

4 Cn

5 Sr

6 Qc


7 Gl

8 Al

9 Sc

Volatile Organic Compounds (GC/MS) by Method 8260D

Analyte	Result (dry) mg/kg	Qualifier	MDL (dry) mg/kg	RDL (dry) mg/kg	Dilution	Analysis date / time	Batch
Di-isopropyl ether	U		0.00498	0.0122	1.32	11/10/2021 13:38	WG1771934
Ethylbenzene	U		0.00896	0.0304	1.32	11/10/2021 13:38	WG1771934
Hexachloro-1,3-butadiene	U		0.0729	0.304	1.32	11/10/2021 13:38	WG1771934
Isopropylbenzene	U		0.00517	0.0304	1.32	11/10/2021 13:38	WG1771934
p-Isopropyltoluene	U		0.0310	0.0608	1.32	11/10/2021 13:38	WG1771934
2-Butanone (MEK)	U		0.772	1.22	1.32	11/10/2021 13:38	WG1771934
Methylene Chloride	U		0.0807	0.304	1.32	11/10/2021 13:38	WG1771934
4-Methyl-2-pentanone (MIBK)	U		0.0277	0.304	1.32	11/10/2021 13:38	WG1771934
Methyl tert-butyl ether	U		0.00426	0.0122	1.32	11/10/2021 13:38	WG1771934
Naphthalene	U		0.0593	0.152	1.32	11/10/2021 13:38	WG1771934
n-Propylbenzene	U		0.0115	0.0608	1.32	11/10/2021 13:38	WG1771934
Styrene	U		0.00278	0.152	1.32	11/10/2021 13:38	WG1771934
1,1,1,2-Tetrachloroethane	U		0.0115	0.0304	1.32	11/10/2021 13:38	WG1771934
1,1,2,2-Tetrachloroethane	U		0.00845	0.0304	1.32	11/10/2021 13:38	WG1771934
1,1,2-Trichlorotrifluoroethane	U		0.00916	0.0304	1.32	11/10/2021 13:38	WG1771934
Tetrachloroethene	U		0.0109	0.0304	1.32	11/10/2021 13:38	WG1771934
Toluene	0.435		0.0158	0.0608	1.32	11/10/2021 13:38	WG1771934
1,2,3-Trichlorobenzene	U		0.0892	0.152	1.32	11/10/2021 13:38	WG1771934
1,2,4-Trichlorobenzene	U		0.0535	0.152	1.32	11/10/2021 13:38	WG1771934
1,1,1-Trichloroethane	U		0.0112	0.0304	1.32	11/10/2021 13:38	WG1771934
1,1,2-Trichloroethane	U		0.00726	0.0304	1.32	11/10/2021 13:38	WG1771934
Trichloroethene	U		0.00710	0.0122	1.32	11/10/2021 13:38	WG1771934
Trichlorofluoromethane	U		0.0100	0.0304	1.32	11/10/2021 13:38	WG1771934
1,2,3-Trichloropropane	U		0.0197	0.152	1.32	11/10/2021 13:38	WG1771934
1,2,4-Trimethylbenzene	U		0.0192	0.0608	1.32	11/10/2021 13:38	WG1771934
1,2,3-Trimethylbenzene	U		0.0192	0.0608	1.32	11/10/2021 13:38	WG1771934
1,3,5-Trimethylbenzene	0.215		0.0243	0.0608	1.32	11/10/2021 13:38	WG1771934
Vinyl chloride	U		0.0141	0.0304	1.32	11/10/2021 13:38	WG1771934
Xylenes, Total	0.0140	U	0.0107	0.0790	1.32	11/10/2021 13:38	WG1771934
(S) Toluene-d8	111			75.0-131		11/10/2021 13:38	WG1771934
(S) 4-Bromofluorobenzene	90.2			67.0-138		11/10/2021 13:38	WG1771934
(S) 1,2-Dichloroethane-d4	103			70.0-130		11/10/2021 13:38	WG1771934



Polychlorinated Biphenyls (GC) by Method 8082 A

Analyte	Result (dry) mg/kg	Qualifier	MDL (dry) mg/kg	RDL (dry) mg/kg	Dilution	Analysis date / time	Batch
PCB 1016	U		0.0669	0.193	1	11/17/2021 20:45	WG1772854
PCB 1221	U		0.0669	0.193	1	11/17/2021 20:45	WG1772854
PCB 1232	U		0.0669	0.193	1	11/17/2021 20:45	WG1772854
PCB 1242	U		0.0669	0.193	1	11/17/2021 20:45	WG1772854
PCB 1248	U		0.0418	0.0963	1	11/17/2021 20:45	WG1772854
PCB 1254	U		0.0418	0.0963	1	11/17/2021 20:45	WG1772854
PCB 1260	U		0.0418	0.0963	1	11/17/2021 20:45	WG1772854
(S) Decachlorobiphenyl	74.7			10.0-135		11/17/2021 20:45	WG1772854
(S) Tetrachloro-m-xylene	80.5			10.0-139		11/17/2021 20:45	WG1772854

Wet Chemistry by Method 1664B

Analyte	Result	Qualifier	MDL	RDL	Dilution	Analysis date / time	Batch
Oil & Grease (Hexane Extr)	U		1220	5260	1	11/12/2021 08:22	WG1772765

Mercury by Method 7470A

Analyte	Result	Qualifier	MDL	RDL	Dilution	Analysis date / time	Batch
Mercury	U		0.100	0.200	1	11/14/2021 15:09	WG1772646

Metals (ICP) by Method 6010D

Analyte	Result	Qualifier	MDL	RDL	Dilution	Analysis date / time	Batch
Arsenic	U		4.40	10.0	1	11/23/2021 23:11	WG1778865
Barium	30.9		0.736	5.00	1	11/23/2021 23:11	WG1778865
Cadmium	U		0.479	2.00	1	11/23/2021 23:11	WG1778865
Chromium	U		1.40	10.0	1	11/23/2021 23:11	WG1778865
Lead	U		2.99	6.00	1	11/23/2021 23:11	WG1778865
Selenium	U		7.35	10.0	1	11/23/2021 23:11	WG1778865
Silver	U		1.54	5.00	1	11/23/2021 23:11	WG1778865

Volatile Organic Compounds (GC/MS) by Method 8260D

Analyte	Result	Qualifier	MDL	RDL	Dilution	Analysis date / time	Batch
Acetone	26.1	J	11.3	50.0	1	11/12/2021 00:55	WG1773047
Acrolein	U		2.54	50.0	1	11/12/2021 00:55	WG1773047
Acrylonitrile	U		0.671	10.0	1	11/12/2021 00:55	WG1773047
Benzene	U		0.0941	1.00	1	11/12/2021 00:55	WG1773047
Bromobenzene	U		0.118	1.00	1	11/12/2021 00:55	WG1773047
Bromodichloromethane	U		0.136	1.00	1	11/12/2021 00:55	WG1773047
Bromoform	U	C3	0.129	1.00	1	11/12/2021 00:55	WG1773047
Bromomethane	U		0.605	5.00	1	11/12/2021 00:55	WG1773047
n-Butylbenzene	U	J4	0.157	1.00	1	11/12/2021 00:55	WG1773047
sec-Butylbenzene	U	J4	0.125	1.00	1	11/12/2021 00:55	WG1773047
tert-Butylbenzene	U	J4	0.127	1.00	1	11/12/2021 00:55	WG1773047
Carbon tetrachloride	U		0.128	1.00	1	11/12/2021 00:55	WG1773047
Chlorobenzene	U		0.116	1.00	1	11/12/2021 00:55	WG1773047
Chlorodibromomethane	U		0.140	1.00	1	11/12/2021 00:55	WG1773047
Chloroethane	U		0.192	5.00	1	11/12/2021 00:55	WG1773047
Chloroform	U		0.111	5.00	1	11/12/2021 00:55	WG1773047
Chloromethane	U	J4	0.960	2.50	1	11/12/2021 00:55	WG1773047
2-Chlorotoluene	U		0.106	1.00	1	11/12/2021 00:55	WG1773047
4-Chlorotoluene	U	J4	0.114	1.00	1	11/12/2021 00:55	WG1773047
1,2-Dibromo-3-Chloropropane	U		0.276	5.00	1	11/12/2021 00:55	WG1773047
1,2-Dibromoethane	U		0.126	1.00	1	11/12/2021 00:55	WG1773047
Dibromomethane	U		0.122	1.00	1	11/12/2021 00:55	WG1773047
1,2-Dichlorobenzene	U		0.107	1.00	1	11/12/2021 00:55	WG1773047
1,3-Dichlorobenzene	U		0.110	1.00	1	11/12/2021 00:55	WG1773047
1,4-Dichlorobenzene	U		0.120	1.00	1	11/12/2021 00:55	WG1773047
Dichlorodifluoromethane	U		0.374	5.00	1	11/12/2021 00:55	WG1773047
1,1-Dichloroethane	U		0.100	1.00	1	11/12/2021 00:55	WG1773047
1,2-Dichloroethane	U		0.0819	1.00	1	11/12/2021 00:55	WG1773047
1,1-Dichloroethene	U		0.188	1.00	1	11/12/2021 00:55	WG1773047
cis-1,2-Dichloroethene	U		0.126	1.00	1	11/12/2021 00:55	WG1773047
trans-1,2-Dichloroethene	U		0.149	1.00	1	11/12/2021 00:55	WG1773047
1,2-Dichloropropane	U		0.149	1.00	1	11/12/2021 00:55	WG1773047
1,1-Dichloropropene	U		0.142	1.00	1	11/12/2021 00:55	WG1773047

¹ Cp² Tc³ Ss⁴ Cn⁵ Sr⁶ Qc⁷ Gl⁸ Al⁹ Sc

Volatile Organic Compounds (GC/MS) by Method 8260D

Analyte	Result ug/l	Qualifier	MDL ug/l	RDL ug/l	Dilution	Analysis date / time	Batch
1,3-Dichloropropane	U		0.110	1.00	1	11/12/2021 00:55	WG1773047
cis-1,3-Dichloropropene	U		0.111	1.00	1	11/12/2021 00:55	WG1773047
trans-1,3-Dichloropropene	U		0.118	1.00	1	11/12/2021 00:55	WG1773047
2,2-Dichloropropane	U		0.161	1.00	1	11/12/2021 00:55	WG1773047
Di-isopropyl ether	U		0.105	1.00	1	11/12/2021 00:55	WG1773047
Ethylbenzene	U		0.137	1.00	1	11/12/2021 00:55	WG1773047
Hexachloro-1,3-butadiene	U		0.337	1.00	1	11/12/2021 00:55	WG1773047
Isopropylbenzene	U		0.105	1.00	1	11/12/2021 00:55	WG1773047
p-Isopropyltoluene	U		0.120	1.00	1	11/12/2021 00:55	WG1773047
2-Butanone (MEK)	U		1.19	10.0	1	11/12/2021 00:55	WG1773047
Methylene Chloride	U		0.430	5.00	1	11/12/2021 00:55	WG1773047
4-Methyl-2-pentanone (MIBK)	U		0.478	10.0	1	11/12/2021 00:55	WG1773047
Methyl tert-butyl ether	U		0.101	1.00	1	11/12/2021 00:55	WG1773047
Naphthalene	U		1.00	5.00	1	11/12/2021 00:55	WG1773047
n-Propylbenzene	U	J4	0.0993	1.00	1	11/12/2021 00:55	WG1773047
Styrene	U		0.118	1.00	1	11/12/2021 00:55	WG1773047
1,1,1,2-Tetrachloroethane	U		0.147	1.00	1	11/12/2021 00:55	WG1773047
1,1,2,2-Tetrachloroethane	U	J4	0.133	1.00	1	11/12/2021 00:55	WG1773047
1,1,2-Trichlorotrifluoroethane	U		0.180	1.00	1	11/12/2021 00:55	WG1773047
Tetrachloroethene	U		0.300	1.00	1	11/12/2021 00:55	WG1773047
Toluene	U		0.278	1.00	1	11/12/2021 00:55	WG1773047
1,2,3-Trichlorobenzene	U		0.230	1.00	1	11/12/2021 00:55	WG1773047
1,2,4-Trichlorobenzene	U		0.481	1.00	1	11/12/2021 00:55	WG1773047
1,1,1-Trichloroethane	U		0.149	1.00	1	11/12/2021 00:55	WG1773047
1,1,2-Trichloroethane	U		0.158	1.00	1	11/12/2021 00:55	WG1773047
Trichloroethene	U		0.190	1.00	1	11/12/2021 00:55	WG1773047
Trichlorofluoromethane	U		0.160	5.00	1	11/12/2021 00:55	WG1773047
1,2,3-Trichloropropane	U		0.237	2.50	1	11/12/2021 00:55	WG1773047
1,2,4-Trimethylbenzene	U		0.322	1.00	1	11/12/2021 00:55	WG1773047
1,2,3-Trimethylbenzene	U		0.104	1.00	1	11/12/2021 00:55	WG1773047
1,3,5-Trimethylbenzene	U	J4	0.104	1.00	1	11/12/2021 00:55	WG1773047
Vinyl chloride	U		0.234	1.00	1	11/12/2021 00:55	WG1773047
Xylenes, Total	U		0.174	3.00	1	11/12/2021 00:55	WG1773047
(S) Toluene-d8	110			80.0-120		11/12/2021 00:55	WG1773047
(S) 4-Bromofluorobenzene	82.6			77.0-126		11/12/2021 00:55	WG1773047
(S) 1,2-Dichloroethane-d4	117			70.0-130		11/12/2021 00:55	WG1773047

1 Cp

2 Tc

3 Ss

4 Cn

5 Sr

6 Qc

7 Gl

8 Al

9 Sc

Wet Chemistry by Method 1664B

Analyte	Result ug/l	Qualifier	MDL ug/l	RDL ug/l	Dilution	Analysis date / time	Batch
Oil & Grease (Hexane Extr)	U	J6	1220	5260	1	11/12/2021 08:22	WG1772765

Mercury by Method 7470A

Analyte	Result ug/l	Qualifier	MDL ug/l	RDL ug/l	Dilution	Analysis date / time	Batch
Mercury	U		0.100	0.200	1	11/14/2021 15:11	WG1772646

Metals (ICP) by Method 6010D

Analyte	Result ug/l	Qualifier	MDL ug/l	RDL ug/l	Dilution	Analysis date / time	Batch
Arsenic	U		4.40	10.0	1	11/23/2021 23:28	WG1778865
Barium	46.1		0.736	5.00	1	11/23/2021 23:28	WG1778865
Cadmium	U		0.479	2.00	1	11/23/2021 23:28	WG1778865
Chromium	1.51	J	1.40	10.0	1	11/23/2021 23:28	WG1778865
Lead	U		2.99	6.00	1	11/23/2021 23:28	WG1778865
Selenium	U		7.35	10.0	1	11/23/2021 23:28	WG1778865
Silver	U		1.54	5.00	1	11/23/2021 23:28	WG1778865

Volatile Organic Compounds (GC/MS) by Method 8260D

Analyte	Result ug/l	Qualifier	MDL ug/l	RDL ug/l	Dilution	Analysis date / time	Batch
Acetone	695		113	500	10	11/16/2021 14:58	WG1774720
Acrolein	U		2.54	50.0	1	11/12/2021 01:15	WG1773047
Acrylonitrile	U		0.671	10.0	1	11/12/2021 01:15	WG1773047
Benzene	U		0.0941	1.00	1	11/12/2021 01:15	WG1773047
Bromobenzene	U		0.118	1.00	1	11/12/2021 01:15	WG1773047
Bromodichloromethane	U		0.136	1.00	1	11/12/2021 01:15	WG1773047
Bromoform	U	C3	0.129	1.00	1	11/12/2021 01:15	WG1773047
Bromomethane	U		0.605	5.00	1	11/12/2021 01:15	WG1773047
n-Butylbenzene	U	J4	0.157	1.00	1	11/12/2021 01:15	WG1773047
sec-Butylbenzene	U	J4	0.125	1.00	1	11/12/2021 01:15	WG1773047
tert-Butylbenzene	U	J4	0.127	1.00	1	11/12/2021 01:15	WG1773047
Carbon tetrachloride	U		0.128	1.00	1	11/12/2021 01:15	WG1773047
Chlorobenzene	U		0.116	1.00	1	11/12/2021 01:15	WG1773047
Chlorodibromomethane	U		0.140	1.00	1	11/12/2021 01:15	WG1773047
Chloroethane	U		0.192	5.00	1	11/12/2021 01:15	WG1773047
Chloroform	U		0.111	5.00	1	11/12/2021 01:15	WG1773047
Chloromethane	U	J4	0.960	2.50	1	11/12/2021 01:15	WG1773047
2-Chlorotoluene	U		0.106	1.00	1	11/12/2021 01:15	WG1773047
4-Chlorotoluene	U	J4	0.114	1.00	1	11/12/2021 01:15	WG1773047
1,2-Dibromo-3-Chloropropane	U		0.276	5.00	1	11/12/2021 01:15	WG1773047
1,2-Dibromoethane	U		0.126	1.00	1	11/12/2021 01:15	WG1773047
Dibromomethane	U		0.122	1.00	1	11/12/2021 01:15	WG1773047
1,2-Dichlorobenzene	U		0.107	1.00	1	11/12/2021 01:15	WG1773047
1,3-Dichlorobenzene	U		0.110	1.00	1	11/12/2021 01:15	WG1773047
1,4-Dichlorobenzene	U		0.120	1.00	1	11/12/2021 01:15	WG1773047
Dichlorodifluoromethane	U		0.374	5.00	1	11/12/2021 01:15	WG1773047
1,1-Dichloroethane	U		0.100	1.00	1	11/12/2021 01:15	WG1773047
1,2-Dichloroethane	U		0.0819	1.00	1	11/12/2021 01:15	WG1773047
1,1-Dichloroethene	U		0.188	1.00	1	11/12/2021 01:15	WG1773047
cis-1,2-Dichloroethene	U		0.126	1.00	1	11/12/2021 01:15	WG1773047
trans-1,2-Dichloroethene	U		0.149	1.00	1	11/12/2021 01:15	WG1773047
1,2-Dichloropropane	U		0.149	1.00	1	11/12/2021 01:15	WG1773047
1,1-Dichloropropene	U		0.142	1.00	1	11/12/2021 01:15	WG1773047

1 Cp

2 Tc

3 Ss

4 Cn

5 Sr

6 Qc

7 Gl

8 Al

9 Sc

Volatile Organic Compounds (GC/MS) by Method 8260D

Analyte	Result ug/l	Qualifier	MDL ug/l	RDL ug/l	Dilution	Analysis date / time	Batch
1,3-Dichloropropane	U		0.110	1.00	1	11/12/2021 01:15	WG1773047
cis-1,3-Dichloropropene	U		0.111	1.00	1	11/12/2021 01:15	WG1773047
trans-1,3-Dichloropropene	U		0.118	1.00	1	11/12/2021 01:15	WG1773047
2,2-Dichloropropane	U		0.161	1.00	1	11/12/2021 01:15	WG1773047
Di-isopropyl ether	U		0.105	1.00	1	11/12/2021 01:15	WG1773047
Ethylbenzene	U		0.137	1.00	1	11/12/2021 01:15	WG1773047
Hexachloro-1,3-butadiene	U		0.337	1.00	1	11/12/2021 01:15	WG1773047
Isopropylbenzene	U		0.105	1.00	1	11/12/2021 01:15	WG1773047
p-Isopropyltoluene	U		0.120	1.00	1	11/12/2021 01:15	WG1773047
2-Butanone (MEK)	U		1.19	10.0	1	11/12/2021 01:15	WG1773047
Methylene Chloride	U		0.430	5.00	1	11/12/2021 01:15	WG1773047
4-Methyl-2-pentanone (MIBK)	U		0.478	10.0	1	11/12/2021 01:15	WG1773047
Methyl tert-butyl ether	U		0.101	1.00	1	11/12/2021 01:15	WG1773047
Naphthalene	U		1.00	5.00	1	11/12/2021 01:15	WG1773047
n-Propylbenzene	U	<u>J4</u>	0.0993	1.00	1	11/12/2021 01:15	WG1773047
Styrene	U		0.118	1.00	1	11/12/2021 01:15	WG1773047
1,1,1,2-Tetrachloroethane	U		0.147	1.00	1	11/12/2021 01:15	WG1773047
1,1,2,2-Tetrachloroethane	U	<u>J4</u>	0.133	1.00	1	11/12/2021 01:15	WG1773047
1,1,2-Trichlorotrifluoroethane	U		0.180	1.00	1	11/12/2021 01:15	WG1773047
Tetrachloroethene	U		0.300	1.00	1	11/12/2021 01:15	WG1773047
Toluene	U		0.278	1.00	1	11/12/2021 01:15	WG1773047
1,2,3-Trichlorobenzene	U		0.230	1.00	1	11/12/2021 01:15	WG1773047
1,2,4-Trichlorobenzene	U		0.481	1.00	1	11/12/2021 01:15	WG1773047
1,1,1-Trichloroethane	U		0.149	1.00	1	11/12/2021 01:15	WG1773047
1,1,2-Trichloroethane	U		0.158	1.00	1	11/12/2021 01:15	WG1773047
Trichloroethene	U		0.190	1.00	1	11/12/2021 01:15	WG1773047
Trichlorofluoromethane	U		0.160	5.00	1	11/12/2021 01:15	WG1773047
1,2,3-Trichloropropane	U		0.237	2.50	1	11/12/2021 01:15	WG1773047
1,2,4-Trimethylbenzene	U		0.322	1.00	1	11/12/2021 01:15	WG1773047
1,2,3-Trimethylbenzene	U		0.104	1.00	1	11/12/2021 01:15	WG1773047
1,3,5-Trimethylbenzene	U	<u>J4</u>	0.104	1.00	1	11/12/2021 01:15	WG1773047
Vinyl chloride	U		0.234	1.00	1	11/12/2021 01:15	WG1773047
Xylenes, Total	U		0.174	3.00	1	11/12/2021 01:15	WG1773047
(S) Toluene-d8	110			80.0-120		11/12/2021 01:15	WG1773047
(S) Toluene-d8	99.8			80.0-120		11/16/2021 14:58	WG1774720
(S) 4-Bromofluorobenzene	85.2			77.0-126		11/12/2021 01:15	WG1773047
(S) 4-Bromofluorobenzene	97.4			77.0-126		11/16/2021 14:58	WG1774720
(S) 1,2-Dichloroethane-d4	112			70.0-130		11/12/2021 01:15	WG1773047
(S) 1,2-Dichloroethane-d4	138	<u>J1</u>		70.0-130		11/16/2021 14:58	WG1774720

1 Cp

2 Tc

3 Ss

4 Cn

5 Sr

6 Qc

7 Gl

8 Al

9 Sc

Wet Chemistry by Method 1664B

Analyte	Result ug/l	Qualifier	MDL ug/l	RDL ug/l	Dilution	Analysis date / time	Batch
Oil & Grease (Hexane Extr)	U		1160	5000	1	11/12/2021 08:22	WG1772765

Mercury by Method 7470A

Analyte	Result ug/l	Qualifier	MDL ug/l	RDL ug/l	Dilution	Analysis date / time	Batch
Mercury	U		0.100	0.200	1	11/14/2021 15:13	WG1772646

Metals (ICP) by Method 6010D

Analyte	Result ug/l	Qualifier	MDL ug/l	RDL ug/l	Dilution	Analysis date / time	Batch
Arsenic	U		4.40	10.0	1	11/23/2021 23:31	WG1778865
Barium	36.0		0.736	5.00	1	11/23/2021 23:31	WG1778865
Cadmium	U		0.479	2.00	1	11/23/2021 23:31	WG1778865
Chromium	U		1.40	10.0	1	11/23/2021 23:31	WG1778865
Lead	U		2.99	6.00	1	11/23/2021 23:31	WG1778865
Selenium	U		7.35	10.0	1	11/23/2021 23:31	WG1778865
Silver	U		1.54	5.00	1	11/23/2021 23:31	WG1778865

Volatile Organic Compounds (GC/MS) by Method 8260D

Analyte	Result ug/l	Qualifier	MDL ug/l	RDL ug/l	Dilution	Analysis date / time	Batch
Acetone	U		11.3	50.0	1	11/12/2021 10:10	WG1773075
Acrolein	U		2.54	50.0	1	11/12/2021 10:10	WG1773075
Acrylonitrile	U		0.671	10.0	1	11/12/2021 10:10	WG1773075
Benzene	U		0.0941	1.00	1	11/12/2021 10:10	WG1773075
Bromobenzene	U		0.118	1.00	1	11/12/2021 10:10	WG1773075
Bromodichloromethane	U		0.136	1.00	1	11/12/2021 10:10	WG1773075
Bromoform	U	C3	0.129	1.00	1	11/12/2021 10:10	WG1773075
Bromomethane	U	C3	0.605	5.00	1	11/12/2021 10:10	WG1773075
n-Butylbenzene	U		0.157	1.00	1	11/12/2021 10:10	WG1773075
sec-Butylbenzene	U		0.125	1.00	1	11/12/2021 10:10	WG1773075
tert-Butylbenzene	U		0.127	1.00	1	11/12/2021 10:10	WG1773075
Carbon tetrachloride	U	C3	0.128	1.00	1	11/12/2021 10:10	WG1773075
Chlorobenzene	U		0.116	1.00	1	11/12/2021 10:10	WG1773075
Chlorodibromomethane	U		0.140	1.00	1	11/12/2021 10:10	WG1773075
Chloroethane	U		0.192	5.00	1	11/12/2021 10:10	WG1773075
Chloroform	U		0.111	5.00	1	11/12/2021 10:10	WG1773075
Chloromethane	U	J4	0.960	2.50	1	11/12/2021 10:10	WG1773075
2-Chlorotoluene	U		0.106	1.00	1	11/12/2021 10:10	WG1773075
4-Chlorotoluene	U		0.114	1.00	1	11/12/2021 10:10	WG1773075
1,2-Dibromo-3-Chloropropane	U	C3	0.276	5.00	1	11/12/2021 10:10	WG1773075
1,2-Dibromoethane	U		0.126	1.00	1	11/12/2021 10:10	WG1773075
Dibromomethane	U		0.122	1.00	1	11/12/2021 10:10	WG1773075
1,2-Dichlorobenzene	U		0.107	1.00	1	11/12/2021 10:10	WG1773075
1,3-Dichlorobenzene	U		0.110	1.00	1	11/12/2021 10:10	WG1773075
1,4-Dichlorobenzene	U		0.120	1.00	1	11/12/2021 10:10	WG1773075
Dichlorodifluoromethane	U		0.374	5.00	1	11/12/2021 10:10	WG1773075
1,1-Dichloroethane	U		0.100	1.00	1	11/12/2021 10:10	WG1773075
1,2-Dichloroethane	U		0.0819	1.00	1	11/12/2021 10:10	WG1773075
1,1-Dichloroethene	U		0.188	1.00	1	11/12/2021 10:10	WG1773075
cis-1,2-Dichloroethene	U		0.126	1.00	1	11/12/2021 10:10	WG1773075
trans-1,2-Dichloroethene	U		0.149	1.00	1	11/12/2021 10:10	WG1773075
1,2-Dichloropropane	U		0.149	1.00	1	11/12/2021 10:10	WG1773075
1,1-Dichloropropene	U		0.142	1.00	1	11/12/2021 10:10	WG1773075

¹ Cp² Tc³ Ss⁴ Cn⁵ Sr⁶ Qc⁷ Gl⁸ Al⁹ Sc

Volatile Organic Compounds (GC/MS) by Method 8260D

Analyte	Result ug/l	Qualifier	MDL ug/l	RDL ug/l	Dilution	Analysis date / time	Batch
1,3-Dichloropropane	U		0.110	1.00	1	11/12/2021 10:10	WG1773075
cis-1,3-Dichloropropene	U		0.111	1.00	1	11/12/2021 10:10	WG1773075
trans-1,3-Dichloropropene	U		0.118	1.00	1	11/12/2021 10:10	WG1773075
2,2-Dichloropropane	U		0.161	1.00	1	11/12/2021 10:10	WG1773075
Di-isopropyl ether	U		0.105	1.00	1	11/12/2021 10:10	WG1773075
Ethylbenzene	U		0.137	1.00	1	11/12/2021 10:10	WG1773075
Hexachloro-1,3-butadiene	U	<u>C3</u>	0.337	1.00	1	11/12/2021 10:10	WG1773075
Isopropylbenzene	U		0.105	1.00	1	11/12/2021 10:10	WG1773075
p-Isopropyltoluene	U		0.120	1.00	1	11/12/2021 10:10	WG1773075
2-Butanone (MEK)	U		1.19	10.0	1	11/12/2021 10:10	WG1773075
Methylene Chloride	U		0.430	5.00	1	11/12/2021 10:10	WG1773075
4-Methyl-2-pentanone (MIBK)	U		0.478	10.0	1	11/12/2021 10:10	WG1773075
Methyl tert-butyl ether	U		0.101	1.00	1	11/12/2021 10:10	WG1773075
Naphthalene	U	<u>C3 J4</u>	1.00	5.00	1	11/12/2021 10:10	WG1773075
n-Propylbenzene	U		0.0993	1.00	1	11/12/2021 10:10	WG1773075
Styrene	U		0.118	1.00	1	11/12/2021 10:10	WG1773075
1,1,1,2-Tetrachloroethane	U		0.147	1.00	1	11/12/2021 10:10	WG1773075
1,1,2,2-Tetrachloroethane	U		0.133	1.00	1	11/12/2021 10:10	WG1773075
1,1,2-Trichlorotrifluoroethane	U		0.180	1.00	1	11/12/2021 10:10	WG1773075
Tetrachloroethene	U		0.300	1.00	1	11/12/2021 10:10	WG1773075
Toluene	U		0.278	1.00	1	11/12/2021 10:10	WG1773075
1,2,3-Trichlorobenzene	U	<u>C4 J4</u>	0.230	1.00	1	11/12/2021 10:10	WG1773075
1,2,4-Trichlorobenzene	U	<u>C3</u>	0.481	1.00	1	11/12/2021 10:10	WG1773075
1,1,1-Trichloroethane	U		0.149	1.00	1	11/12/2021 10:10	WG1773075
1,1,2-Trichloroethane	U		0.158	1.00	1	11/12/2021 10:10	WG1773075
Trichloroethene	U		0.190	1.00	1	11/12/2021 10:10	WG1773075
Trichlorofluoromethane	U		0.160	5.00	1	11/12/2021 10:10	WG1773075
1,2,3-Trichloropropane	U		0.237	2.50	1	11/12/2021 10:10	WG1773075
1,2,4-Trimethylbenzene	U		0.322	1.00	1	11/12/2021 10:10	WG1773075
1,2,3-Trimethylbenzene	U		0.104	1.00	1	11/12/2021 10:10	WG1773075
1,3,5-Trimethylbenzene	U		0.104	1.00	1	11/12/2021 10:10	WG1773075
Vinyl chloride	U		0.234	1.00	1	11/12/2021 10:10	WG1773075
Xylenes, Total	U		0.174	3.00	1	11/12/2021 10:10	WG1773075
(S) Toluene-d8	103			80.0-120		11/12/2021 10:10	WG1773075
(S) 4-Bromofluorobenzene	93.6			77.0-126		11/12/2021 10:10	WG1773075
(S) 1,2-Dichloroethane-d4	110			70.0-130		11/12/2021 10:10	WG1773075

1 Cp

2 Tc

3 Ss

4 Cn

5 Sr

6 Qc

7 Gl

8 Al

9 Sc

Wet Chemistry by Method 1664B

Analyte	Result	Qualifier	MDL	RDL	Dilution	Analysis date / time	Batch
Oil & Grease (Hexane Extr)	2000	J	1290	5560	1	11/12/2021 08:22	WG1772765

Mercury by Method 7470A

Analyte	Result	Qualifier	MDL	RDL	Dilution	Analysis date / time	Batch
Mercury	U		0.100	0.200	1	11/14/2021 15:15	WG1772646

Metals (ICP) by Method 6010D

Analyte	Result	Qualifier	MDL	RDL	Dilution	Analysis date / time	Batch
Arsenic	U		4.40	10.0	1	11/23/2021 23:39	WG1778865
Barium	5.33		0.736	5.00	1	11/23/2021 23:39	WG1778865
Cadmium	U		0.479	2.00	1	11/23/2021 23:39	WG1778865
Chromium	U		1.40	10.0	1	11/23/2021 23:39	WG1778865
Lead	U		2.99	6.00	1	11/23/2021 23:39	WG1778865
Selenium	U		7.35	10.0	1	11/23/2021 23:39	WG1778865
Silver	U		1.54	5.00	1	11/23/2021 23:39	WG1778865

Volatile Organic Compounds (GC/MS) by Method 8260D

Analyte	Result	Qualifier	MDL	RDL	Dilution	Analysis date / time	Batch
Acetone	U		11.3	50.0	1	11/12/2021 04:42	WG1773185
Acrolein	U	C3	2.54	50.0	1	11/12/2021 04:42	WG1773185
Acrylonitrile	U		0.671	10.0	1	11/12/2021 04:42	WG1773185
Benzene	U		0.0941	1.00	1	11/12/2021 04:42	WG1773185
Bromobenzene	U		0.118	1.00	1	11/12/2021 04:42	WG1773185
Bromodichloromethane	U		0.136	1.00	1	11/12/2021 04:42	WG1773185
Bromoform	U		0.129	1.00	1	11/12/2021 04:42	WG1773185
Bromomethane	U		0.605	5.00	1	11/12/2021 04:42	WG1773185
n-Butylbenzene	U		0.157	1.00	1	11/12/2021 04:42	WG1773185
sec-Butylbenzene	U		0.125	1.00	1	11/12/2021 04:42	WG1773185
tert-Butylbenzene	U		0.127	1.00	1	11/12/2021 04:42	WG1773185
Carbon tetrachloride	U		0.128	1.00	1	11/12/2021 04:42	WG1773185
Chlorobenzene	U		0.116	1.00	1	11/12/2021 04:42	WG1773185
Chlorodibromomethane	U		0.140	1.00	1	11/12/2021 04:42	WG1773185
Chloroethane	U		0.192	5.00	1	11/12/2021 04:42	WG1773185
Chloroform	U		0.111	5.00	1	11/12/2021 04:42	WG1773185
Chloromethane	U		0.960	2.50	1	11/12/2021 04:42	WG1773185
2-Chlorotoluene	U		0.106	1.00	1	11/12/2021 04:42	WG1773185
4-Chlorotoluene	U		0.114	1.00	1	11/12/2021 04:42	WG1773185
1,2-Dibromo-3-Chloropropane	U		0.276	5.00	1	11/12/2021 04:42	WG1773185
1,2-Dibromoethane	U		0.126	1.00	1	11/12/2021 04:42	WG1773185
Dibromomethane	U		0.122	1.00	1	11/12/2021 04:42	WG1773185
1,2-Dichlorobenzene	U		0.107	1.00	1	11/12/2021 04:42	WG1773185
1,3-Dichlorobenzene	U		0.110	1.00	1	11/12/2021 04:42	WG1773185
1,4-Dichlorobenzene	U		0.120	1.00	1	11/12/2021 04:42	WG1773185
Dichlorodifluoromethane	U		0.374	5.00	1	11/12/2021 04:42	WG1773185
1,1-Dichloroethane	U		0.100	1.00	1	11/12/2021 04:42	WG1773185
1,2-Dichloroethane	U		0.0819	1.00	1	11/12/2021 04:42	WG1773185
1,1-Dichloroethene	U		0.188	1.00	1	11/12/2021 04:42	WG1773185
cis-1,2-Dichloroethene	U		0.126	1.00	1	11/12/2021 04:42	WG1773185
trans-1,2-Dichloroethene	U		0.149	1.00	1	11/12/2021 04:42	WG1773185
1,2-Dichloropropane	U		0.149	1.00	1	11/12/2021 04:42	WG1773185
1,1-Dichloropropene	U		0.142	1.00	1	11/12/2021 04:42	WG1773185

1 Cp

2 Tc

3 Ss

4 Cn

5 Sr

6 Qc

7 Gl

8 Al

9 Sc

Volatile Organic Compounds (GC/MS) by Method 8260D

Analyte	Result ug/l	Qualifier	MDL ug/l	RDL ug/l	Dilution	Analysis date / time	Batch
1,3-Dichloropropane	U		0.110	1.00	1	11/12/2021 04:42	WG1773185
cis-1,3-Dichloropropene	U		0.111	1.00	1	11/12/2021 04:42	WG1773185
trans-1,3-Dichloropropene	U		0.118	1.00	1	11/12/2021 04:42	WG1773185
2,2-Dichloropropane	U		0.161	1.00	1	11/12/2021 04:42	WG1773185
Di-isopropyl ether	U		0.105	1.00	1	11/12/2021 04:42	WG1773185
Ethylbenzene	U		0.137	1.00	1	11/12/2021 04:42	WG1773185
Hexachloro-1,3-butadiene	U		0.337	1.00	1	11/12/2021 04:42	WG1773185
Isopropylbenzene	U		0.105	1.00	1	11/12/2021 04:42	WG1773185
p-Isopropyltoluene	U		0.120	1.00	1	11/12/2021 04:42	WG1773185
2-Butanone (MEK)	U		1.19	10.0	1	11/12/2021 04:42	WG1773185
Methylene Chloride	U	J4	0.430	5.00	1	11/12/2021 04:42	WG1773185
4-Methyl-2-pentanone (MIBK)	U		0.478	10.0	1	11/12/2021 04:42	WG1773185
Methyl tert-butyl ether	U		0.101	1.00	1	11/12/2021 04:42	WG1773185
Naphthalene	U		1.00	5.00	1	11/12/2021 04:42	WG1773185
n-Propylbenzene	U		0.0993	1.00	1	11/12/2021 04:42	WG1773185
Styrene	U		0.118	1.00	1	11/12/2021 04:42	WG1773185
1,1,1,2-Tetrachloroethane	U		0.147	1.00	1	11/12/2021 04:42	WG1773185
1,1,2,2-Tetrachloroethane	U		0.133	1.00	1	11/12/2021 04:42	WG1773185
1,1,2-Trichlorotrifluoroethane	U		0.180	1.00	1	11/12/2021 04:42	WG1773185
Tetrachloroethene	U		0.300	1.00	1	11/12/2021 04:42	WG1773185
Toluene	U		0.278	1.00	1	11/12/2021 04:42	WG1773185
1,2,3-Trichlorobenzene	U		0.230	1.00	1	11/12/2021 04:42	WG1773185
1,2,4-Trichlorobenzene	U		0.481	1.00	1	11/12/2021 04:42	WG1773185
1,1,1-Trichloroethane	U		0.149	1.00	1	11/12/2021 04:42	WG1773185
1,1,2-Trichloroethane	U		0.158	1.00	1	11/12/2021 04:42	WG1773185
Trichloroethene	U		0.190	1.00	1	11/12/2021 04:42	WG1773185
Trichlorofluoromethane	U		0.160	5.00	1	11/12/2021 04:42	WG1773185
1,2,3-Trichloropropane	U		0.237	2.50	1	11/12/2021 04:42	WG1773185
1,2,4-Trimethylbenzene	U		0.322	1.00	1	11/12/2021 04:42	WG1773185
1,2,3-Trimethylbenzene	U		0.104	1.00	1	11/12/2021 04:42	WG1773185
1,3,5-Trimethylbenzene	U		0.104	1.00	1	11/12/2021 04:42	WG1773185
Vinyl chloride	U		0.234	1.00	1	11/12/2021 04:42	WG1773185
Xylenes, Total	U		0.174	3.00	1	11/12/2021 04:42	WG1773185
(S) Toluene-d8	98.8			80.0-120		11/12/2021 04:42	WG1773185
(S) 4-Bromofluorobenzene	94.8			77.0-126		11/12/2021 04:42	WG1773185
(S) 1,2-Dichloroethane-d4	101			70.0-130		11/12/2021 04:42	WG1773185

1 Cp

2 Tc

3 Ss

4 Cn

5 Sr

6 Qc

7 Gl

8 Al

9 Sc

Wet Chemistry by Method 1664B

Analyte	Result	Qualifier	MDL	RDL	Dilution	Analysis date / time	Batch
Oil & Grease (Hexane Extr)	1890	J	1220	5260	1	11/15/2021 15:49	WG1773481

Mercury by Method 7470A

Analyte	Result	Qualifier	MDL	RDL	Dilution	Analysis date / time	Batch
Mercury	U		0.100	0.200	1	11/14/2021 15:17	WG1772646

Metals (ICP) by Method 6010D

Analyte	Result	Qualifier	MDL	RDL	Dilution	Analysis date / time	Batch
Arsenic	U		4.40	10.0	1	11/23/2021 23:42	WG1778865
Barium	284		0.736	5.00	1	11/23/2021 23:42	WG1778865
Cadmium	U		0.479	2.00	1	11/23/2021 23:42	WG1778865
Chromium	U		1.40	10.0	1	11/23/2021 23:42	WG1778865
Lead	U		2.99	6.00	1	11/23/2021 23:42	WG1778865
Selenium	U		7.35	10.0	1	11/23/2021 23:42	WG1778865
Silver	U		1.54	5.00	1	11/23/2021 23:42	WG1778865

Volatile Organic Compounds (GC/MS) by Method 8260D

Analyte	Result	Qualifier	MDL	RDL	Dilution	Analysis date / time	Batch
Acetone	26.1	J	11.3	50.0	1	11/12/2021 05:02	WG1773185
Acrolein	U	C3	2.54	50.0	1	11/12/2021 05:02	WG1773185
Acrylonitrile	U		0.671	10.0	1	11/12/2021 05:02	WG1773185
Benzene	U		0.0941	1.00	1	11/12/2021 05:02	WG1773185
Bromobenzene	U		0.118	1.00	1	11/12/2021 05:02	WG1773185
Bromodichloromethane	U		0.136	1.00	1	11/12/2021 05:02	WG1773185
Bromoform	U		0.129	1.00	1	11/12/2021 05:02	WG1773185
Bromomethane	U		0.605	5.00	1	11/12/2021 05:02	WG1773185
n-Butylbenzene	U		0.157	1.00	1	11/12/2021 05:02	WG1773185
sec-Butylbenzene	U		0.125	1.00	1	11/12/2021 05:02	WG1773185
tert-Butylbenzene	U		0.127	1.00	1	11/12/2021 05:02	WG1773185
Carbon tetrachloride	U		0.128	1.00	1	11/12/2021 05:02	WG1773185
Chlorobenzene	U		0.116	1.00	1	11/12/2021 05:02	WG1773185
Chlorodibromomethane	U		0.140	1.00	1	11/12/2021 05:02	WG1773185
Chloroethane	U		0.192	5.00	1	11/12/2021 05:02	WG1773185
Chloroform	U		0.111	5.00	1	11/12/2021 05:02	WG1773185
Chloromethane	U		0.960	2.50	1	11/12/2021 05:02	WG1773185
2-Chlorotoluene	U		0.106	1.00	1	11/12/2021 05:02	WG1773185
4-Chlorotoluene	U		0.114	1.00	1	11/12/2021 05:02	WG1773185
1,2-Dibromo-3-Chloropropane	U		0.276	5.00	1	11/12/2021 05:02	WG1773185
1,2-Dibromoethane	U		0.126	1.00	1	11/12/2021 05:02	WG1773185
Dibromomethane	U		0.122	1.00	1	11/12/2021 05:02	WG1773185
1,2-Dichlorobenzene	U		0.107	1.00	1	11/12/2021 05:02	WG1773185
1,3-Dichlorobenzene	U		0.110	1.00	1	11/12/2021 05:02	WG1773185
1,4-Dichlorobenzene	U		0.120	1.00	1	11/12/2021 05:02	WG1773185
Dichlorodifluoromethane	U		0.374	5.00	1	11/12/2021 05:02	WG1773185
1,1-Dichloroethane	U		0.100	1.00	1	11/12/2021 05:02	WG1773185
1,2-Dichloroethane	U		0.0819	1.00	1	11/12/2021 05:02	WG1773185
1,1-Dichloroethene	U		0.188	1.00	1	11/12/2021 05:02	WG1773185
cis-1,2-Dichloroethene	U		0.126	1.00	1	11/12/2021 05:02	WG1773185
trans-1,2-Dichloroethene	U		0.149	1.00	1	11/12/2021 05:02	WG1773185
1,2-Dichloropropane	U		0.149	1.00	1	11/12/2021 05:02	WG1773185
1,1-Dichloropropene	U		0.142	1.00	1	11/12/2021 05:02	WG1773185

1 Cp

2 Tc

3 Ss

4 Cn

5 Sr

6 Qc

7 Gl

8 Al

9 Sc

Volatile Organic Compounds (GC/MS) by Method 8260D

Analyte	Result ug/l	Qualifier	MDL ug/l	RDL ug/l	Dilution	Analysis date / time	Batch
1,3-Dichloropropane	U		0.110	1.00	1	11/12/2021 05:02	WG1773185
cis-1,3-Dichloropropene	U		0.111	1.00	1	11/12/2021 05:02	WG1773185
trans-1,3-Dichloropropene	U		0.118	1.00	1	11/12/2021 05:02	WG1773185
2,2-Dichloropropane	U		0.161	1.00	1	11/12/2021 05:02	WG1773185
Di-isopropyl ether	U		0.105	1.00	1	11/12/2021 05:02	WG1773185
Ethylbenzene	U		0.137	1.00	1	11/12/2021 05:02	WG1773185
Hexachloro-1,3-butadiene	U		0.337	1.00	1	11/12/2021 05:02	WG1773185
Isopropylbenzene	U		0.105	1.00	1	11/12/2021 05:02	WG1773185
p-Isopropyltoluene	U		0.120	1.00	1	11/12/2021 05:02	WG1773185
2-Butanone (MEK)	U		1.19	10.0	1	11/12/2021 05:02	WG1773185
Methylene Chloride	U	J4	0.430	5.00	1	11/12/2021 05:02	WG1773185
4-Methyl-2-pentanone (MIBK)	U		0.478	10.0	1	11/12/2021 05:02	WG1773185
Methyl tert-butyl ether	U		0.101	1.00	1	11/12/2021 05:02	WG1773185
Naphthalene	U		1.00	5.00	1	11/12/2021 05:02	WG1773185
n-Propylbenzene	U		0.0993	1.00	1	11/12/2021 05:02	WG1773185
Styrene	U		0.118	1.00	1	11/12/2021 05:02	WG1773185
1,1,1,2-Tetrachloroethane	U		0.147	1.00	1	11/12/2021 05:02	WG1773185
1,1,2,2-Tetrachloroethane	U		0.133	1.00	1	11/12/2021 05:02	WG1773185
1,1,2-Trichlorotrifluoroethane	U		0.180	1.00	1	11/12/2021 05:02	WG1773185
Tetrachloroethene	U		0.300	1.00	1	11/12/2021 05:02	WG1773185
Toluene	U		0.278	1.00	1	11/12/2021 05:02	WG1773185
1,2,3-Trichlorobenzene	U		0.230	1.00	1	11/12/2021 05:02	WG1773185
1,2,4-Trichlorobenzene	U		0.481	1.00	1	11/12/2021 05:02	WG1773185
1,1,1-Trichloroethane	U		0.149	1.00	1	11/12/2021 05:02	WG1773185
1,1,2-Trichloroethane	U		0.158	1.00	1	11/12/2021 05:02	WG1773185
Trichloroethene	U		0.190	1.00	1	11/12/2021 05:02	WG1773185
Trichlorofluoromethane	U		0.160	5.00	1	11/12/2021 05:02	WG1773185
1,2,3-Trichloropropane	U		0.237	2.50	1	11/12/2021 05:02	WG1773185
1,2,4-Trimethylbenzene	U		0.322	1.00	1	11/12/2021 05:02	WG1773185
1,2,3-Trimethylbenzene	U		0.104	1.00	1	11/12/2021 05:02	WG1773185
1,3,5-Trimethylbenzene	U		0.104	1.00	1	11/12/2021 05:02	WG1773185
Vinyl chloride	U		0.234	1.00	1	11/12/2021 05:02	WG1773185
Xylenes, Total	U		0.174	3.00	1	11/12/2021 05:02	WG1773185
(S) Toluene-d8	98.6			80.0-120		11/12/2021 05:02	WG1773185
(S) 4-Bromofluorobenzene	92.3			77.0-126		11/12/2021 05:02	WG1773185
(S) 1,2-Dichloroethane-d4	103			70.0-130		11/12/2021 05:02	WG1773185

1 Cp

2 Tc

3 Ss

4 Cn

5 Sr

6 Qc

7 Gl

8 Al

9 Sc

Wet Chemistry by Method 1664B

Analyte	Result ug/l	Qualifier	MDL ug/l	RDL ug/l	Dilution	Analysis date / time	Batch
Oil & Grease (Hexane Extr)	U	J6	1220	5260	1	11/12/2021 08:33	WG1772766

Mercury by Method 7470A

Analyte	Result ug/l	Qualifier	MDL ug/l	RDL ug/l	Dilution	Analysis date / time	Batch
Mercury	U		0.100	0.200	1	11/14/2021 15:19	WG1772646

Metals (ICP) by Method 6010D

Analyte	Result ug/l	Qualifier	MDL ug/l	RDL ug/l	Dilution	Analysis date / time	Batch
Arsenic	U		4.40	10.0	1	11/23/2021 23:44	WG1778865
Barium	8.29		0.736	5.00	1	11/23/2021 23:44	WG1778865
Cadmium	U		0.479	2.00	1	11/23/2021 23:44	WG1778865
Chromium	U		1.40	10.0	1	11/23/2021 23:44	WG1778865
Lead	U		2.99	6.00	1	11/23/2021 23:44	WG1778865
Selenium	U		7.35	10.0	1	11/23/2021 23:44	WG1778865
Silver	U		1.54	5.00	1	11/23/2021 23:44	WG1778865

Volatile Organic Compounds (GC/MS) by Method 8260D

Analyte	Result ug/l	Qualifier	MDL ug/l	RDL ug/l	Dilution	Analysis date / time	Batch
Acetone	U		11.3	50.0	1	11/12/2021 05:50	WG1773185
Acrolein	U	C3	2.54	50.0	1	11/12/2021 05:50	WG1773185
Acrylonitrile	U		0.671	10.0	1	11/12/2021 05:50	WG1773185
Benzene	U		0.0941	1.00	1	11/12/2021 05:50	WG1773185
Bromobenzene	U		0.118	1.00	1	11/12/2021 05:50	WG1773185
Bromodichloromethane	U		0.136	1.00	1	11/12/2021 05:50	WG1773185
Bromoform	U		0.129	1.00	1	11/12/2021 05:50	WG1773185
Bromomethane	U		0.605	5.00	1	11/12/2021 05:50	WG1773185
n-Butylbenzene	U		0.157	1.00	1	11/12/2021 05:50	WG1773185
sec-Butylbenzene	U		0.125	1.00	1	11/12/2021 05:50	WG1773185
tert-Butylbenzene	U		0.127	1.00	1	11/12/2021 05:50	WG1773185
Carbon tetrachloride	U		0.128	1.00	1	11/12/2021 05:50	WG1773185
Chlorobenzene	U		0.116	1.00	1	11/12/2021 05:50	WG1773185
Chlorodibromomethane	U		0.140	1.00	1	11/12/2021 05:50	WG1773185
Chloroethane	U		0.192	5.00	1	11/12/2021 05:50	WG1773185
Chloroform	U		0.111	5.00	1	11/12/2021 05:50	WG1773185
Chloromethane	U		0.960	2.50	1	11/12/2021 05:50	WG1773185
2-Chlorotoluene	U		0.106	1.00	1	11/12/2021 05:50	WG1773185
4-Chlorotoluene	U		0.114	1.00	1	11/12/2021 05:50	WG1773185
1,2-Dibromo-3-Chloropropane	U		0.276	5.00	1	11/12/2021 05:50	WG1773185
1,2-Dibromoethane	U		0.126	1.00	1	11/12/2021 05:50	WG1773185
Dibromomethane	U		0.122	1.00	1	11/12/2021 05:50	WG1773185
1,2-Dichlorobenzene	U		0.107	1.00	1	11/12/2021 05:50	WG1773185
1,3-Dichlorobenzene	U		0.110	1.00	1	11/12/2021 05:50	WG1773185
1,4-Dichlorobenzene	U		0.120	1.00	1	11/12/2021 05:50	WG1773185
Dichlorodifluoromethane	U		0.374	5.00	1	11/12/2021 05:50	WG1773185
1,1-Dichloroethane	U		0.100	1.00	1	11/12/2021 05:50	WG1773185
1,2-Dichloroethane	U		0.0819	1.00	1	11/12/2021 05:50	WG1773185
1,1-Dichloroethene	U		0.188	1.00	1	11/12/2021 05:50	WG1773185
cis-1,2-Dichloroethene	U		0.126	1.00	1	11/12/2021 05:50	WG1773185
trans-1,2-Dichloroethene	U		0.149	1.00	1	11/12/2021 05:50	WG1773185
1,2-Dichloropropane	U		0.149	1.00	1	11/12/2021 05:50	WG1773185
1,1-Dichloropropene	U		0.142	1.00	1	11/12/2021 05:50	WG1773185

¹ Cp² Tc³ Ss⁴ Cn⁵ Sr⁶ Qc⁷ Gl⁸ Al⁹ Sc

Volatile Organic Compounds (GC/MS) by Method 8260D

Analyte	Result ug/l	Qualifier	MDL ug/l	RDL ug/l	Dilution	Analysis date / time	Batch
1,3-Dichloropropane	U		0.110	1.00	1	11/12/2021 05:50	WG1773185
cis-1,3-Dichloropropene	U		0.111	1.00	1	11/12/2021 05:50	WG1773185
trans-1,3-Dichloropropene	U		0.118	1.00	1	11/12/2021 05:50	WG1773185
2,2-Dichloropropane	U		0.161	1.00	1	11/12/2021 05:50	WG1773185
Di-isopropyl ether	U		0.105	1.00	1	11/12/2021 05:50	WG1773185
Ethylbenzene	U		0.137	1.00	1	11/12/2021 05:50	WG1773185
Hexachloro-1,3-butadiene	U		0.337	1.00	1	11/12/2021 05:50	WG1773185
Isopropylbenzene	U		0.105	1.00	1	11/12/2021 05:50	WG1773185
p-Isopropyltoluene	U		0.120	1.00	1	11/12/2021 05:50	WG1773185
2-Butanone (MEK)	U		1.19	10.0	1	11/12/2021 05:50	WG1773185
Methylene Chloride	U	J4	0.430	5.00	1	11/12/2021 05:50	WG1773185
4-Methyl-2-pentanone (MIBK)	U		0.478	10.0	1	11/12/2021 05:50	WG1773185
Methyl tert-butyl ether	U		0.101	1.00	1	11/12/2021 05:50	WG1773185
Naphthalene	U		1.00	5.00	1	11/12/2021 05:50	WG1773185
n-Propylbenzene	U		0.0993	1.00	1	11/12/2021 05:50	WG1773185
Styrene	U		0.118	1.00	1	11/12/2021 05:50	WG1773185
1,1,1,2-Tetrachloroethane	U		0.147	1.00	1	11/12/2021 05:50	WG1773185
1,1,2,2-Tetrachloroethane	U		0.133	1.00	1	11/12/2021 05:50	WG1773185
1,1,2-Trichlorotrifluoroethane	U		0.180	1.00	1	11/12/2021 05:50	WG1773185
Tetrachloroethene	U		0.300	1.00	1	11/12/2021 05:50	WG1773185
Toluene	U		0.278	1.00	1	11/12/2021 05:50	WG1773185
1,2,3-Trichlorobenzene	U		0.230	1.00	1	11/12/2021 05:50	WG1773185
1,2,4-Trichlorobenzene	U		0.481	1.00	1	11/12/2021 05:50	WG1773185
1,1,1-Trichloroethane	U		0.149	1.00	1	11/12/2021 05:50	WG1773185
1,1,2-Trichloroethane	U		0.158	1.00	1	11/12/2021 05:50	WG1773185
Trichloroethene	U		0.190	1.00	1	11/12/2021 05:50	WG1773185
Trichlorofluoromethane	U		0.160	5.00	1	11/12/2021 05:50	WG1773185
1,2,3-Trichloropropane	U		0.237	2.50	1	11/12/2021 05:50	WG1773185
1,2,4-Trimethylbenzene	U		0.322	1.00	1	11/12/2021 05:50	WG1773185
1,2,3-Trimethylbenzene	U		0.104	1.00	1	11/12/2021 05:50	WG1773185
1,3,5-Trimethylbenzene	U		0.104	1.00	1	11/12/2021 05:50	WG1773185
Vinyl chloride	U		0.234	1.00	1	11/12/2021 05:50	WG1773185
Xylenes, Total	U		0.174	3.00	1	11/12/2021 05:50	WG1773185
(S) Toluene-d8	100			80.0-120		11/12/2021 05:50	WG1773185
(S) 4-Bromofluorobenzene	96.2			77.0-126		11/12/2021 05:50	WG1773185
(S) 1,2-Dichloroethane-d4	104			70.0-130		11/12/2021 05:50	WG1773185

1 Cp

2 Tc

3 Ss

4 Cn

5 Sr

6 Qc

7 Gl

8 Al

9 Sc

Wet Chemistry by Method 1664B

Analyte	Result ug/l	Qualifier	MDL ug/l	RDL ug/l	Dilution	Analysis date / time	Batch
Oil & Grease (Hexane Extr)	U		1360	5880	1	11/12/2021 08:33	WG1772766

Mercury by Method 7470A

Analyte	Result ug/l	Qualifier	MDL ug/l	RDL ug/l	Dilution	Analysis date / time	Batch
Mercury	U		0.100	0.200	1	11/14/2021 15:25	WG1772646

Metals (ICP) by Method 6010D

Analyte	Result ug/l	Qualifier	MDL ug/l	RDL ug/l	Dilution	Analysis date / time	Batch
Arsenic	U		4.40	10.0	1	11/23/2021 23:47	WG1778865
Barium	180		0.736	5.00	1	11/23/2021 23:47	WG1778865
Cadmium	U		0.479	2.00	1	11/23/2021 23:47	WG1778865
Chromium	U		1.40	10.0	1	11/23/2021 23:47	WG1778865
Lead	U		2.99	6.00	1	11/23/2021 23:47	WG1778865
Selenium	U		7.35	10.0	1	11/23/2021 23:47	WG1778865
Silver	U		1.54	5.00	1	11/23/2021 23:47	WG1778865

Volatile Organic Compounds (GC/MS) by Method 8260D

Analyte	Result ug/l	Qualifier	MDL ug/l	RDL ug/l	Dilution	Analysis date / time	Batch
Acetone	U		11.3	50.0	1	11/12/2021 06:11	WG1773185
Acrolein	U	C3	2.54	50.0	1	11/12/2021 06:11	WG1773185
Acrylonitrile	U		0.671	10.0	1	11/12/2021 06:11	WG1773185
Benzene	U		0.0941	1.00	1	11/12/2021 06:11	WG1773185
Bromobenzene	U		0.118	1.00	1	11/12/2021 06:11	WG1773185
Bromodichloromethane	U		0.136	1.00	1	11/12/2021 06:11	WG1773185
Bromoform	U		0.129	1.00	1	11/12/2021 06:11	WG1773185
Bromomethane	U		0.605	5.00	1	11/12/2021 06:11	WG1773185
n-Butylbenzene	U		0.157	1.00	1	11/12/2021 06:11	WG1773185
sec-Butylbenzene	U		0.125	1.00	1	11/12/2021 06:11	WG1773185
tert-Butylbenzene	U		0.127	1.00	1	11/12/2021 06:11	WG1773185
Carbon tetrachloride	U		0.128	1.00	1	11/12/2021 06:11	WG1773185
Chlorobenzene	U		0.116	1.00	1	11/12/2021 06:11	WG1773185
Chlorodibromomethane	U		0.140	1.00	1	11/12/2021 06:11	WG1773185
Chloroethane	U		0.192	5.00	1	11/12/2021 06:11	WG1773185
Chloroform	U		0.111	5.00	1	11/12/2021 06:11	WG1773185
Chloromethane	U		0.960	2.50	1	11/12/2021 06:11	WG1773185
2-Chlorotoluene	U		0.106	1.00	1	11/12/2021 06:11	WG1773185
4-Chlorotoluene	U		0.114	1.00	1	11/12/2021 06:11	WG1773185
1,2-Dibromo-3-Chloropropane	U		0.276	5.00	1	11/12/2021 06:11	WG1773185
1,2-Dibromoethane	U		0.126	1.00	1	11/12/2021 06:11	WG1773185
Dibromomethane	U		0.122	1.00	1	11/12/2021 06:11	WG1773185
1,2-Dichlorobenzene	U		0.107	1.00	1	11/12/2021 06:11	WG1773185
1,3-Dichlorobenzene	U		0.110	1.00	1	11/12/2021 06:11	WG1773185
1,4-Dichlorobenzene	U		0.120	1.00	1	11/12/2021 06:11	WG1773185
Dichlorodifluoromethane	U		0.374	5.00	1	11/12/2021 06:11	WG1773185
1,1-Dichloroethane	U		0.100	1.00	1	11/12/2021 06:11	WG1773185
1,2-Dichloroethane	U		0.0819	1.00	1	11/12/2021 06:11	WG1773185
1,1-Dichloroethene	U		0.188	1.00	1	11/12/2021 06:11	WG1773185
cis-1,2-Dichloroethene	U		0.126	1.00	1	11/12/2021 06:11	WG1773185
trans-1,2-Dichloroethene	U		0.149	1.00	1	11/12/2021 06:11	WG1773185
1,2-Dichloropropane	U		0.149	1.00	1	11/12/2021 06:11	WG1773185
1,1-Dichloropropene	U		0.142	1.00	1	11/12/2021 06:11	WG1773185

1 Cp

2 Tc

3 Ss

4 Cn

5 Sr

6 Qc

7 Gl

8 Al

9 Sc

Volatile Organic Compounds (GC/MS) by Method 8260D

Analyte	Result ug/l	Qualifier	MDL ug/l	RDL ug/l	Dilution	Analysis date / time	Batch
1,3-Dichloropropane	U		0.110	1.00	1	11/12/2021 06:11	WG1773185
cis-1,3-Dichloropropene	U		0.111	1.00	1	11/12/2021 06:11	WG1773185
trans-1,3-Dichloropropene	U		0.118	1.00	1	11/12/2021 06:11	WG1773185
2,2-Dichloropropane	U		0.161	1.00	1	11/12/2021 06:11	WG1773185
Di-isopropyl ether	U		0.105	1.00	1	11/12/2021 06:11	WG1773185
Ethylbenzene	U		0.137	1.00	1	11/12/2021 06:11	WG1773185
Hexachloro-1,3-butadiene	U		0.337	1.00	1	11/12/2021 06:11	WG1773185
Isopropylbenzene	U		0.105	1.00	1	11/12/2021 06:11	WG1773185
p-Isopropyltoluene	U		0.120	1.00	1	11/12/2021 06:11	WG1773185
2-Butanone (MEK)	U		1.19	10.0	1	11/12/2021 06:11	WG1773185
Methylene Chloride	U	J4	0.430	5.00	1	11/12/2021 06:11	WG1773185
4-Methyl-2-pentanone (MIBK)	U		0.478	10.0	1	11/12/2021 06:11	WG1773185
Methyl tert-butyl ether	U		0.101	1.00	1	11/12/2021 06:11	WG1773185
Naphthalene	U		1.00	5.00	1	11/12/2021 06:11	WG1773185
n-Propylbenzene	U		0.0993	1.00	1	11/12/2021 06:11	WG1773185
Styrene	U		0.118	1.00	1	11/12/2021 06:11	WG1773185
1,1,1,2-Tetrachloroethane	U		0.147	1.00	1	11/12/2021 06:11	WG1773185
1,1,2,2-Tetrachloroethane	U		0.133	1.00	1	11/12/2021 06:11	WG1773185
1,1,2-Trichlorotrifluoroethane	U		0.180	1.00	1	11/12/2021 06:11	WG1773185
Tetrachloroethene	U		0.300	1.00	1	11/12/2021 06:11	WG1773185
Toluene	U		0.278	1.00	1	11/12/2021 06:11	WG1773185
1,2,3-Trichlorobenzene	U		0.230	1.00	1	11/12/2021 06:11	WG1773185
1,2,4-Trichlorobenzene	U		0.481	1.00	1	11/12/2021 06:11	WG1773185
1,1,1-Trichloroethane	U		0.149	1.00	1	11/12/2021 06:11	WG1773185
1,1,2-Trichloroethane	U		0.158	1.00	1	11/12/2021 06:11	WG1773185
Trichloroethene	U		0.190	1.00	1	11/12/2021 06:11	WG1773185
Trichlorofluoromethane	U		0.160	5.00	1	11/12/2021 06:11	WG1773185
1,2,3-Trichloropropane	U		0.237	2.50	1	11/12/2021 06:11	WG1773185
1,2,4-Trimethylbenzene	U		0.322	1.00	1	11/12/2021 06:11	WG1773185
1,2,3-Trimethylbenzene	U		0.104	1.00	1	11/12/2021 06:11	WG1773185
1,3,5-Trimethylbenzene	U		0.104	1.00	1	11/12/2021 06:11	WG1773185
Vinyl chloride	U		0.234	1.00	1	11/12/2021 06:11	WG1773185
Xylenes, Total	U		0.174	3.00	1	11/12/2021 06:11	WG1773185
(S) Toluene-d8	98.0			80.0-120		11/12/2021 06:11	WG1773185
(S) 4-Bromofluorobenzene	98.3			77.0-126		11/12/2021 06:11	WG1773185
(S) 1,2-Dichloroethane-d4	99.6			70.0-130		11/12/2021 06:11	WG1773185

1 Cp

2 Tc

3 Ss

4 Cn

5 Sr

6 Qc

7 Gl

8 Al

9 Sc

Wet Chemistry by Method 1664B

Analyte	Result ug/l	Qualifier	MDL ug/l	RDL ug/l	Dilution	Analysis date / time	Batch
Oil & Grease (Hexane Extr)	U		1160	5000	1	11/15/2021 15:49	WG1773481

Mercury by Method 7470A

Analyte	Result ug/l	Qualifier	MDL ug/l	RDL ug/l	Dilution	Analysis date / time	Batch
Mercury	0.108	J	0.100	0.200	1	11/14/2021 15:27	WG1772646

Metals (ICP) by Method 6010D

Analyte	Result ug/l	Qualifier	MDL ug/l	RDL ug/l	Dilution	Analysis date / time	Batch
Arsenic	U		4.40	10.0	1	11/23/2021 23:50	WG1778865
Barium	196		0.736	5.00	1	11/23/2021 23:50	WG1778865
Cadmium	U		0.479	2.00	1	11/23/2021 23:50	WG1778865
Chromium	U		1.40	10.0	1	11/23/2021 23:50	WG1778865
Lead	U		2.99	6.00	1	11/23/2021 23:50	WG1778865
Selenium	U		7.35	10.0	1	11/23/2021 23:50	WG1778865
Silver	U		1.54	5.00	1	11/23/2021 23:50	WG1778865

Volatile Organic Compounds (GC/MS) by Method 8260D

Analyte	Result ug/l	Qualifier	MDL ug/l	RDL ug/l	Dilution	Analysis date / time	Batch
Acetone	14.6	J	11.3	50.0	1	11/12/2021 06:31	WG1773185
Acrolein	U	C3	2.54	50.0	1	11/12/2021 06:31	WG1773185
Acrylonitrile	U		0.671	10.0	1	11/12/2021 06:31	WG1773185
Benzene	U		0.0941	1.00	1	11/12/2021 06:31	WG1773185
Bromobenzene	U		0.118	1.00	1	11/12/2021 06:31	WG1773185
Bromodichloromethane	U		0.136	1.00	1	11/12/2021 06:31	WG1773185
Bromoform	U		0.129	1.00	1	11/12/2021 06:31	WG1773185
Bromomethane	U		0.605	5.00	1	11/12/2021 06:31	WG1773185
n-Butylbenzene	U		0.157	1.00	1	11/12/2021 06:31	WG1773185
sec-Butylbenzene	U		0.125	1.00	1	11/12/2021 06:31	WG1773185
tert-Butylbenzene	U		0.127	1.00	1	11/12/2021 06:31	WG1773185
Carbon tetrachloride	U		0.128	1.00	1	11/12/2021 06:31	WG1773185
Chlorobenzene	U		0.116	1.00	1	11/12/2021 06:31	WG1773185
Chlorodibromomethane	U		0.140	1.00	1	11/12/2021 06:31	WG1773185
Chloroethane	U		0.192	5.00	1	11/12/2021 06:31	WG1773185
Chloroform	U		0.111	5.00	1	11/12/2021 06:31	WG1773185
Chloromethane	U		0.960	2.50	1	11/12/2021 06:31	WG1773185
2-Chlorotoluene	U		0.106	1.00	1	11/12/2021 06:31	WG1773185
4-Chlorotoluene	U		0.114	1.00	1	11/12/2021 06:31	WG1773185
1,2-Dibromo-3-Chloropropane	U		0.276	5.00	1	11/12/2021 06:31	WG1773185
1,2-Dibromoethane	U		0.126	1.00	1	11/12/2021 06:31	WG1773185
Dibromomethane	U		0.122	1.00	1	11/12/2021 06:31	WG1773185
1,2-Dichlorobenzene	U		0.107	1.00	1	11/12/2021 06:31	WG1773185
1,3-Dichlorobenzene	U		0.110	1.00	1	11/12/2021 06:31	WG1773185
1,4-Dichlorobenzene	U		0.120	1.00	1	11/12/2021 06:31	WG1773185
Dichlorodifluoromethane	U		0.374	5.00	1	11/12/2021 06:31	WG1773185
1,1-Dichloroethane	U		0.100	1.00	1	11/12/2021 06:31	WG1773185
1,2-Dichloroethane	U		0.0819	1.00	1	11/12/2021 06:31	WG1773185
1,1-Dichloroethene	U		0.188	1.00	1	11/12/2021 06:31	WG1773185
cis-1,2-Dichloroethene	U		0.126	1.00	1	11/12/2021 06:31	WG1773185
trans-1,2-Dichloroethene	U		0.149	1.00	1	11/12/2021 06:31	WG1773185
1,2-Dichloropropane	U		0.149	1.00	1	11/12/2021 06:31	WG1773185
1,1-Dichloropropene	U		0.142	1.00	1	11/12/2021 06:31	WG1773185

1 Cp

2 Tc

3 Ss

4 Cn

5 Sr

6 Qc

7 Gl

8 Al

9 Sc

Volatile Organic Compounds (GC/MS) by Method 8260D

Analyte	Result ug/l	Qualifier	MDL ug/l	RDL ug/l	Dilution	Analysis date / time	Batch
1,3-Dichloropropane	U		0.110	1.00	1	11/12/2021 06:31	WG1773185
cis-1,3-Dichloropropene	U		0.111	1.00	1	11/12/2021 06:31	WG1773185
trans-1,3-Dichloropropene	U		0.118	1.00	1	11/12/2021 06:31	WG1773185
2,2-Dichloropropane	U		0.161	1.00	1	11/12/2021 06:31	WG1773185
Di-isopropyl ether	U		0.105	1.00	1	11/12/2021 06:31	WG1773185
Ethylbenzene	U		0.137	1.00	1	11/12/2021 06:31	WG1773185
Hexachloro-1,3-butadiene	U		0.337	1.00	1	11/12/2021 06:31	WG1773185
Isopropylbenzene	U		0.105	1.00	1	11/12/2021 06:31	WG1773185
p-Isopropyltoluene	U		0.120	1.00	1	11/12/2021 06:31	WG1773185
2-Butanone (MEK)	U		1.19	10.0	1	11/12/2021 06:31	WG1773185
Methylene Chloride	U	J4	0.430	5.00	1	11/12/2021 06:31	WG1773185
4-Methyl-2-pentanone (MIBK)	U		0.478	10.0	1	11/12/2021 06:31	WG1773185
Methyl tert-butyl ether	U		0.101	1.00	1	11/12/2021 06:31	WG1773185
Naphthalene	U		1.00	5.00	1	11/12/2021 06:31	WG1773185
n-Propylbenzene	U		0.0993	1.00	1	11/12/2021 06:31	WG1773185
Styrene	U		0.118	1.00	1	11/12/2021 06:31	WG1773185
1,1,1,2-Tetrachloroethane	U		0.147	1.00	1	11/12/2021 06:31	WG1773185
1,1,2,2-Tetrachloroethane	U		0.133	1.00	1	11/12/2021 06:31	WG1773185
1,1,2-Trichlorotrifluoroethane	U		0.180	1.00	1	11/12/2021 06:31	WG1773185
Tetrachloroethene	U		0.300	1.00	1	11/12/2021 06:31	WG1773185
Toluene	U		0.278	1.00	1	11/12/2021 06:31	WG1773185
1,2,3-Trichlorobenzene	U		0.230	1.00	1	11/12/2021 06:31	WG1773185
1,2,4-Trichlorobenzene	U		0.481	1.00	1	11/12/2021 06:31	WG1773185
1,1,1-Trichloroethane	U		0.149	1.00	1	11/12/2021 06:31	WG1773185
1,1,2-Trichloroethane	U		0.158	1.00	1	11/12/2021 06:31	WG1773185
Trichloroethene	U		0.190	1.00	1	11/12/2021 06:31	WG1773185
Trichlorofluoromethane	U		0.160	5.00	1	11/12/2021 06:31	WG1773185
1,2,3-Trichloropropane	U		0.237	2.50	1	11/12/2021 06:31	WG1773185
1,2,4-Trimethylbenzene	U		0.322	1.00	1	11/12/2021 06:31	WG1773185
1,2,3-Trimethylbenzene	U		0.104	1.00	1	11/12/2021 06:31	WG1773185
1,3,5-Trimethylbenzene	U		0.104	1.00	1	11/12/2021 06:31	WG1773185
Vinyl chloride	U		0.234	1.00	1	11/12/2021 06:31	WG1773185
Xylenes, Total	U		0.174	3.00	1	11/12/2021 06:31	WG1773185
(S) Toluene-d8	98.1			80.0-120		11/12/2021 06:31	WG1773185
(S) 4-Bromofluorobenzene	93.4			77.0-126		11/12/2021 06:31	WG1773185
(S) 1,2-Dichloroethane-d4	101			70.0-130		11/12/2021 06:31	WG1773185

1 Cp

2 Tc

3 Ss

4 Cn

5 Sr

6 Qc

7 Gl

8 Al

9 Sc

L1427990-06 Original Sample (OS) • Duplicate (DUP)

(OS) L1427990-06 11/10/21 16:10 • (DUP) R3728306-3 11/10/21 16:10

	Original Result	DUP Result	Dilution	DUP RPD	<u>DUP Qualifier</u>	DUP RPD Limits
Analyte	%	%		%		%
Total Solids	93.0	92.8	1	0.284		10

¹Cp

²Tc

³Ss

⁴Cn

⁵Sr

⁶Qc

⁷Gl

⁸Al

⁹Sc

L1427990-07 Original Sample (OS) • Duplicate (DUP)

(OS) L1427990-07 11/10/21 17:32 • (DUP) R3728340-3 11/10/21 17:32

	Original Result	DUP Result	Dilution	DUP RPD	<u>DUP Qualifier</u>	DUP RPD Limits
Analyte	%	%		%		%
Total Solids	97.9	98.1	1	0.202		10

¹Cp

²Tc

³Ss

⁴Cn

⁵Sr

⁶Qc

⁷Gl

⁸Al

⁹Sc

L1427990-26 Original Sample (OS) • Matrix Spike (MS)

(OS) L1427990-26 11/12/21 08:22 • (MS) R3728634-4 11/12/21 08:22

Analyte	Spike Amount ug/l	Original Result ug/l	MS Result ug/l	MS Rec. %	Dilution	Rec. Limits %	<u>MS Qualifier</u>
Oil & Grease (Hexane Extr)	40000	U	12200	30.5	1	78.0-114	<u>J6</u>

¹Cp

²Tc

³Ss

⁴Cn

⁵Sr

⁶Qc

⁷Gl

⁸Al

⁹Sc

L1427990-30 Original Sample (OS) • Matrix Spike (MS)

(OS) L1427990-30 11/12/21 08:33 • (MS) R3728674-4 11/12/21 08:33

Analyte	Spike Amount ug/l	Original Result ug/l	MS Result ug/l	MS Rec. %	Dilution	Rec. Limits %	<u>MS Qualifier</u>
Oil & Grease (Hexane Extr)	40000	U	18000	45.0	1	78.0-114	<u>J6</u>

¹Cp

²Tc

³Ss

⁴Cn

⁵Sr

⁶Qc

⁷Gl

⁸Al

⁹Sc

L1427990-02 Original Sample (OS) • Duplicate (DUP)

(OS) L1427990-02 11/09/21 01:42 • (DUP) R3727069-4 11/09/21 01:42

	Original Result	DUP Result	Dilution	DUP RPD	DUP Qualifier	DUP RPD Limits
Analyte	mg/kg	mg/kg		%		%
Oil & Grease (Hexane Extr)	20300	22400	1	10.1		20

L1427990-02 Original Sample (OS) • Matrix Spike (MS) • Matrix Spike Duplicate (MSD)

(OS) L1427990-02 11/09/21 01:42 • (MS) R3727069-5 11/09/21 01:42 • (MSD) R3727069-6 11/09/21 01:42

	Spike Amount	Original Result	MS Result	MSD Result	MS Rec.	MSD Rec.	Dilution	Rec. Limits	MS Qualifier	MSD Qualifier	RPD	RPD Limits
Analyte	mg/kg	mg/kg	mg/kg	mg/kg	%	%		%			%	%
Oil & Grease (Hexane Extr)	4000	20300	22300	22500	52.3	57.1	1	80.0-120	V	V	0.851	20

1Cp

2Tc

3Ss

4Cn

5Sr

6Qc

7Gl

8Al

9Sc

L1427990-03 Original Sample (OS) • Duplicate (DUP)

(OS) L1427990-03 11/10/21 15:38 • (DUP) R3727987-4 11/10/21 15:38

	Original Result	DUP Result	Dilution	DUP RPD	DUP Qualifier	DUP RPD Limits
Analyte	mg/kg	mg/kg		%		%
Oil & Grease (Hexane Extr)	22600	29800	1	27.5	J3	20

L1427990-03 Original Sample (OS) • Matrix Spike (MS) • Matrix Spike Duplicate (MSD)

(OS) L1427990-03 11/10/21 15:38 • (MS) R3727987-5 11/10/21 15:38 • (MSD) R3727987-6 11/10/21 15:38

	Spike Amount	Original Result	MS Result	MSD Result	MS Rec.	MSD Rec.	Dilution	Rec. Limits	MS Qualifier	MSD Qualifier	RPD	RPD Limits
Analyte	mg/kg	mg/kg	mg/kg	mg/kg	%	%		%			%	%
Oil & Grease (Hexane Extr)	4000	22600	18500	37000	0.000	362	1	80.0-120	V	J3 V	66.7	20

¹Cp

²Tc

³Ss

⁴Cn

⁵Sr

⁶Qc

⁷Gl

⁸Al

⁹Sc

L1427990-25 Original Sample (OS) • Matrix Spike (MS) • Matrix Spike Duplicate (MSD)

(OS) L1427990-25 11/23/21 23:11 • (MS) R3733348-4 11/23/21 23:16 • (MSD) R3733348-5 11/23/21 23:19

Analyte	Spike Amount ug/l	Original Result ug/l	MS Result ug/l	MSD Result ug/l	MS Rec. %	MSD Rec. %	Dilution	Rec. Limits %	<u>MS Qualifier</u>	<u>MSD Qualifier</u>	RPD %	RPD Limits %
Arsenic	1000	U	966	961	96.6	96.1	1	75.0-125			0.577	20
Barium	1000	30.9	1060	1050	103	102	1	75.0-125			1.26	20
Cadmium	1000	U	985	974	98.5	97.4	1	75.0-125			1.11	20
Chromium	1000	U	983	981	98.3	98.1	1	75.0-125			0.192	20
Lead	1000	U	1000	985	100	98.5	1	75.0-125			1.64	20
Selenium	1000	U	979	969	97.9	96.9	1	75.0-125			1.06	20
Silver	200	U	178	177	89.0	88.3	1	75.0-125			0.829	20

¹Cp

²Tc

³Ss

⁴Cn

⁵Sr

⁶Qc

⁷Gl

⁸Al

⁹Sc

GLOSSARY OF TERMS

Guide to Reading and Understanding Your Laboratory Report


The information below is designed to better explain the various terms used in your report of analytical results from the Laboratory. This is not intended as a comprehensive explanation, and if you have additional questions please contact your project representative.

Results Disclaimer - Information that may be provided by the customer, and contained within this report, include Permit Limits, Project Name, Sample ID, Sample Matrix, Sample Preservation, Field Blanks, Field Spikes, Field Duplicates, On-Site Data, Sampling Collection Dates/Times, and Sampling Location. Results relate to the accuracy of this information provided, and as the samples are received.

Abbreviations and Definitions

(dry)	Results are reported based on the dry weight of the sample. [this will only be present on a dry report basis for soils].
MDL	Method Detection Limit.
MDL (dry)	Method Detection Limit.
RDL	Reported Detection Limit.
RDL (dry)	Reported Detection Limit.
Rec.	Recovery.
RPD	Relative Percent Difference.
SDG	Sample Delivery Group.
(S)	Surrogate (Surrogate Standard) - Analytes added to every blank, sample, Laboratory Control Sample/Duplicate and Matrix Spike/Duplicate; used to evaluate analytical efficiency by measuring recovery. Surrogates are not expected to be detected in all environmental media.
U	Not detected at the Reporting Limit (or MDL where applicable).
Analyte	The name of the particular compound or analysis performed. Some Analyses and Methods will have multiple analytes reported.
Dilution	If the sample matrix contains an interfering material, the sample preparation volume or weight values differ from the standard, or if concentrations of analytes in the sample are higher than the highest limit of concentration that the laboratory can accurately report, the sample may be diluted for analysis. If a value different than 1 is used in this field, the result reported has already been corrected for this factor.
Limits	These are the target % recovery ranges or % difference value that the laboratory has historically determined as normal for the method and analyte being reported. Successful QC Sample analysis will target all analytes recovered or duplicated within these ranges.
Original Sample	The non-spiked sample in the prep batch used to determine the Relative Percent Difference (RPD) from a quality control sample. The Original Sample may not be included within the reported SDG.
Qualifier	This column provides a letter and/or number designation that corresponds to additional information concerning the result reported. If a Qualifier is present, a definition per Qualifier is provided within the Glossary and Definitions page and potentially a discussion of possible implications of the Qualifier in the Case Narrative if applicable.
Result	The actual analytical final result (corrected for any sample specific characteristics) reported for your sample. If there was no measurable result returned for a specific analyte, the result in this column may state "ND" (Not Detected) or "BDL" (Below Detectable Levels). The information in the results column should always be accompanied by either an MDL (Method Detection Limit) or RDL (Reporting Detection Limit) that defines the lowest value that the laboratory could detect or report for this analyte.
Uncertainty (Radiochemistry)	Confidence level of 2 sigma.
Case Narrative (Cn)	A brief discussion about the included sample results, including a discussion of any non-conformances to protocol observed either at sample receipt by the laboratory from the field or during the analytical process. If present, there will be a section in the Case Narrative to discuss the meaning of any data qualifiers used in the report.
Quality Control Summary (Qc)	This section of the report includes the results of the laboratory quality control analyses required by procedure or analytical methods to assist in evaluating the validity of the results reported for your samples. These analyses are not being performed on your samples typically, but on laboratory generated material.
Sample Chain of Custody (Sc)	This is the document created in the field when your samples were initially collected. This is used to verify the time and date of collection, the person collecting the samples, and the analyses that the laboratory is requested to perform. This chain of custody also documents all persons (excluding commercial shippers) that have had control or possession of the samples from the time of collection until delivery to the laboratory for analysis.
Sample Results (Sr)	This section of your report will provide the results of all testing performed on your samples. These results are provided by sample ID and are separated by the analyses performed on each sample. The header line of each analysis section for each sample will provide the name and method number for the analysis reported.
Sample Summary (Ss)	This section of the Analytical Report defines the specific analyses performed for each sample ID, including the dates and times of preparation and/or analysis.

Qualifier	Description
B	The same analyte is found in the associated blank.
C3	The reported concentration is an estimate. The continuing calibration standard associated with this data responded low. Method sensitivity check is acceptable.
C4	The reported concentration is an estimate. The continuing calibration standard associated with this data responded low. Data is likely to show a low bias concerning the result.
J	The identification of the analyte is acceptable; the reported value is an estimate.
J1	Surrogate recovery limits have been exceeded; values are outside upper control limits.
J3	The associated batch QC was outside the established quality control range for precision.
J4	The associated batch QC was outside the established quality control range for accuracy.
J6	The sample matrix interfered with the ability to make any accurate determination; spike value is low.



GLOSSARY OF TERMS

Qualifier	Description
T8	Sample(s) received past/too close to holding time expiration.
V	The sample concentration is too high to evaluate accurate spike recoveries.

¹Cp

²Tc

³Ss

⁴Cn

⁵Sr

⁶Qc

⁷Gl

⁸Al

⁹Sc

ACCREDITATIONS & LOCATIONS


Pace Analytical National 12065 Lebanon Rd Mount Juliet, TN 37122


Alabama	40660	Nebraska	NE-OS-15-05
Alaska	17-026	Nevada	TN000032021-1
Arizona	AZ0612	New Hampshire	2975
Arkansas	88-0469	New Jersey--NELAP	TN002
California	2932	New Mexico ¹	TN00003
Colorado	TN00003	New York	11742
Connecticut	PH-0197	North Carolina	Env375
Florida	E87487	North Carolina ¹	DW21704
Georgia	NELAP	North Carolina ³	41
Georgia ¹	923	North Dakota	R-140
Idaho	TN00003	Ohio--VAP	CL0069
Illinois	200008	Oklahoma	9915
Indiana	C-TN-01	Oregon	TN200002
Iowa	364	Pennsylvania	68-02979
Kansas	E-10277	Rhode Island	LA000356
Kentucky ^{1 6}	KY90010	South Carolina	84004002
Kentucky ²	16	South Dakota	n/a
Louisiana	AI30792	Tennessee ^{1 4}	2006
Louisiana	LA018	Texas	T104704245-20-18
Maine	TN00003	Texas ⁵	LAB0152
Maryland	324	Utah	TN000032021-11
Massachusetts	M-TN003	Vermont	VT2006
Michigan	9958	Virginia	110033
Minnesota	047-999-395	Washington	C847
Mississippi	TN00003	West Virginia	233
Missouri	340	Wisconsin	998093910
Montana	CERT0086	Wyoming	A2LA
A2LA -- ISO 17025	1461.01	AIHA-LAP,LLC EMLAP	100789
A2LA -- ISO 17025 ⁵	1461.02	DOD	1461.01
Canada	1461.01	USDA	P330-15-00234
EPA--Crypto	TN00003		

¹ Drinking Water ² Underground Storage Tanks ³ Aquatic Toxicity ⁴ Chemical/Microbiological ⁵ Mold ⁶ Wastewater n/a Accreditation not applicable

* Not all certifications held by the laboratory are applicable to the results reported in the attached report.

* Accreditation is only applicable to the test methods specified on each scope of accreditation held by Pace Analytical.



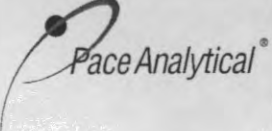Company Name/Address: Wood E&I Solutions Inc. - Wilmington, NC 5710 Oleander Drive, Suite 110				Billing Information: Amanda Huff 5710 Oleander Dr., Ste.110 Wilmington, NC 28403				Pres Chk		Analysis / Container / Preservative								Chain of Custody Page ____ of ____	
Report to: Chris Pruneau				Email To: william.mabie@woodplc.com;chris.pruneau@w														 12065 Lebanon Rd Mount Juliet, TN 37122 Submitting a sample via this chain of custody constitutes acknowledgment and acceptance of the Pace Terms and Conditions found at: https://info.pacelabs.com/hubs/pas-standard-terms.pdf SDG # 1927990 K004 Acctnum: LAWENGWN Template: T198443 Prelogin: P884492 PM: 873 - Heather J Wagner PE: [Signature] Shipped Via: FedEX Ground	
Project Description: Former BASF				City/State Collected: Wilmington, NC		Please Circle: PT MT CT ET													
Phone: 910-452-1185		Client Project #		Lab Project # LAWENGWN-BASF		P.O. #													
Collected by (print): B. Mabie		Site/Facility ID # PENDER COUNTY		Quote #		Date Results Needed		No. of Cntrs											
Collected by (signature): [Signature]		Rush? (Lab MUST Be Notified) <input type="checkbox"/> Same Day <input type="checkbox"/> Five Day <input type="checkbox"/> Next Day <input type="checkbox"/> 5 Day (Rad Only) <input type="checkbox"/> Two Day <input type="checkbox"/> 10 Day (Rad Only) <input type="checkbox"/> Three Day																	
Immediately Packed on Ice N <input type="checkbox"/> Y <input checked="" type="checkbox"/>																			
Sample ID		Comp/Grab	Matrix *	Depth	Date	Time													
NEBY-SS-1-0-1		Grab	SS	0-1	11-2-21	1115													
NEBY-SS-2-0-1			SS	0-1		1130													
NEBY-SS-3-0-1			SS	0-1		1140													
NEBY-SS-4-0-1			SS	0-1		1150													
NEBY-SS-4A-1-2			SS	1-2		1200													
NEBY-SS-4B-1-2			SS	1-2		1215													
NEBY-SS-4C-1-2			SS	1-2		1230													
NEBY-SS-4D-1-2			SS	1-2		1240													
NEBY-SS-4E-3-4			SS	3-4		1250													
NEBY-SS-5-0-1			SS	0-1		1300													
* Matrix: SS - Soil AIR - Air F - Filter GW - Groundwater B - Bioassay WW - WasteWater DW - Drinking Water OT - Other _____		Remarks:																	
		Samples returned via: ____ UPS ____ FedEx ____ Courier		Tracking # 5433 8380 1227															
Relinquished by: (Signature) [Signature]		Date: 11-5-21	Time: 1700	Received by: (Signature)		Trip Blank Received: 3		Yes No HCL/MeOH TBR											
Relinquished by: (Signature)		Date:	Time:	Received by: (Signature)		Temp: 5°C		Bottles Received:								If preservation required by Login: Date/Time			
Relinquished by: (Signature)		Date:	Time:	Received for lab by: (Signature) [Signature]		Date: 11/6/21		Time: 0900								Hold: Condition: NCF / OK			

Company Name/Address:

**Wood E&I Solutions Inc. - Wilmington,
NC****5710 Oleander Drive, Suite 110**

Report to:

Chris Pruneau

Project Description:

Former BASF

City/State

Collected: **Wilmington, NC**

Please Circle:

PT MT CT ET

Phone: **910-452-1185**

Client Project #

Lab Project #

LAWENGWN-BASF

Collected by (print):

P. Mabie

Site/Facility ID #

PENDER COUNTY

P.O. #

Collected by (signature):

Rush? (Lab MUST Be Notified)

☐ Same Day ☐ Five Day
☐ Next Day ☐ 5 Day (Rad Only)
☐ Two Day ☐ 10 Day (Rad Only)
☐ Three Day

Quote #

Date Results Needed

Immediately

Packed on Ice N ☐ Y ☒Pres
Chk

Analysis / Container / Preservative

Chain of Custody Page of 

12065 Lebanon Rd Mount Juliet, TN 37122
Submitting a sample via this chain of custody
constitutes acknowledgment and acceptance of the
Pace Terms and Conditions found at:
<https://info.pacelabs.com/hubs/pas-standard-terms.pdf>

SDG #

Table #

Accnum: **LAWENGWN**Template: **T198443**Prelogin: **P884492**PM: **873 - Heather J Wagner**PB: **102812100**Shipped Via: **FedEX Ground**

Remarks

Sample # (lab only)

Sample ID	Comp/Grab	Matrix *	Depth	Date	Time	No. of Cntrs	8082 100ml Amb-NoPres	CHLORINE 250mlHDPE-NoPres	DRO, TS 4ozClr-NoPres	600 40mlAmb/MeOH10ml/Syr 8260	OGHEX 1L-Clr-WT-HCl	PH, OGHEX 4ozClr-NoPres	RCRA Metals 250mlHDPE-HNO3	SV8082 4ozClr-NoPres	TCLP RCRA Metals 1L-Clr-NoPres	V8260 40mlAmb-HCl	
HDA-SS-1-0-1	Grab	SS	0-1	11-2-21	1440	1						X					pH only -11
HDA-SS-2-0-1		SS	0-1	11-2-21	1450	1						X					pH only -12
HDA-SS-3-0-1		SS	0-1	11-2-21	1500	1						X					pH only -13
CTFS-SEO-SS-1		SS	—	11-3-21	1440	4				X		X		X	X		-14/15
SAB-SEO-SS-1		SS															
RP-SEO-SS-1		SS		11-4-21	0930	4				X		X		X	X		-15/16/17
SB-1-SEO-SS-1		SS			1040	4				X		X		X	X		-16/18/19
RBC-SEO-SS-1		SS			1130	4				X		X		X	X		-18/20/21
SB-3-SEO-SS-1		SS			1400	4				X		X		X	X		-18/22/23
ALL TRIP BLANKS		SS				3											-17/24/25

* Matrix:

SS - Soil AIR - Air F - Filter
 GW - Groundwater B - Bioassay
 WW - WasteWater
 DW - Drinking Water
 OT - Other

Remarks:

pH Temp Flow Other

Samples returned via:

☐ UPS ☐ FedEx ☐ Courier

Tracking #

5433 8380 1205

Sample Receipt Checklist

COC Seal Present/Intact: ☒ Y ☐ N
 COC Signed/Accurate: ☒ Y ☐ N
 Bottles arrive intact: ☒ Y ☐ N
 Correct bottles used: ☒ Y ☐ N
 Sufficient volume sent: ☒ Y ☐ N
 If Applicable
 VOA Zero Headspace: ☐ Y ☒ N
 Preservation Correct/Checked: ☐ Y ☒ N
 RAD Screen <0.5 mR/hr: ☐ Y ☒ N

Relinquished by: (Signature)

Date:

11-5-21

Time:

1700

Received by: (Signature)

Trip Blank Received: Yes/No

3
HCL/MeOH
TBR

Relinquished by: (Signature)

Date:

Time:

Received by: (Signature)

Temp: **77°C** Bottles Received: **83**

If preservation required by Login: Date/Time

Relinquished by: (Signature)

Date:

Time:

Received for lab by: (Signature)

Date: **11/6/21** Time: **0900**

Hold:

Condition:

NCF / OK

Company Name/Address: Wood E&I Solutions Inc. - Wilmington, NC 5710 Oleander Drive, Suite 110				Billing Information: Amanda Huff 5710 Oleander Dr., Ste.110 Wilmington, NC 28403				Pres Chk		Analysis / Container / Preservative										Chain of Custody Page ____ of ____	
										<div style="clear: both;"></div> <small>12065 Lebanon Rd Mount Juliet, TN 37122 Submitting a sample via this chain of custody constitutes acknowledgment and acceptance of the Pace Terms and Conditions found at: https://info.pacelabs.com/hubfs/pas-standard-terms.pdf</small>											
Report to: Chris Pruneau				Email To: william.mabie@woodplc.com;chris.pruneau@w																	
Project Description: Former BASF				City/State Collected: Wilmington, NC		Please Circle: PT MT CT ET															
Phone: 910-452-1185		Client Project #		Lab Project # LAWENGWN-BASF																	
Collected by (print): B. Mabie		Site/Facility ID # PENDER COUNTY		P.O. #																	
Collected by (signature): 		Rush? (Lab MUST Be Notified) <input type="checkbox"/> Same Day <input type="checkbox"/> Five Day <input type="checkbox"/> Next Day <input type="checkbox"/> 5 Day (Rad Only) <input type="checkbox"/> Two Day <input type="checkbox"/> 10 Day (Rad Only) <input type="checkbox"/> Three Day		Quote #																	
Immediately Packed on Ice N <input type="checkbox"/> Y <input checked="" type="checkbox"/>				Date Results Needed		No. of Cntrs															
Sample ID		Comp/Grab	Matrix *	Depth	Date	Time		8082 100ml Amb-NoPres	CHLORINE 250mlHDPE-NoPres	DRO, TS 4ozClr-NoPres	GRO 40mlAmb/MeOH10ml/Syr	OGHEX 1L-Clr-WT-HCI	PH, OGHEX 4ozClr-NoPres	RCRA Metals 250mlHDPE-HNO3	SV8082 4ozClr-NoPres	TCLP RCRA Metals 1L-Clr-NoPres	V8260 40mlAmb-HCI				
NEBMS-SW-1		Grab	GW	-	11-2-21	1530	6					X		X			X	-25			
CTFS-SW-1			GW	-	11-2-21	1550	6					X		X			X	-26			
SKB-SW-1			GW	-	11-3-21	1030	6					X		X			X	-27			
RP-SW-1			GW	-		1050	6					X		X			X	-28			
SB-1-SW-1			GW	-		1100	5					X		X			X	-29			
RDC-SW-1			GW	-		1120	6					X		X			X	-30			
SB-2-SW-1			GW	-		1310	6					X		X			X	-31			
SB-3-SW-1			GW	-		1320	6					X		X			X	-32			
			GW																		
			GW																		

* Matrix:
 SS - Soil AIR - Air F - Filter
 GW - Groundwater B - Bioassay
 WW - WasteWater
 DW - Drinking Water
 OT - Other _____

Remarks:

Samples returned via: _____ Tracking # **5433 8380 1216**

Relinquished by: (Signature) Date: **11-5-21** Time: **1700**

Relinquished by: (Signature) _____ Date: _____ Time: _____

Relinquished by: (Signature) _____ Date: _____ Time: _____

Received by: (Signature) _____ Date: _____ Time: _____

Received by: (Signature) _____ Date: _____ Time: _____

Received for lab by: (Signature) Date: **11/6/21** Time: **0900**

pH _____ Temp _____

Flow _____ Other _____

Trip Blank Received: ☒ Yes/ No ☐ HCL/ MeOH TBR

Temp: **70°C** Bottles Received: **0.3 to 0.3 83**

Hold: _____ Condition: **NCR / OK**

Sample Receipt Checklist

COC Seal Present/Intact: ☒ Y ☐ N

COC Signed/Accurate: ☒ Y ☐ N

Bottles arrive intact: ☒ Y ☐ N

Correct bottles used: ☒ Y ☐ N

Sufficient volume sent: ☒ Y ☐ N

If Applicable

VOA Zero Headspace: ☒ Y ☐ N

Preservation Correct/Checked: ☒ Y ☐ N

RAD Screen <0.5 mR/hr: ☒ Y ☐ N

If preservation required by Login: Date/Time _____

R5

11/06-NCF-L1427990-LAWENGWN PM

Time estimate: 0h

Time spent: 0h

Grouping date: 6 November 20

Members



Paul Minnich (responsible)

- ☐ Parameter(s) past holding time
- ☐ Temperature not in range
- ☐ Improper container type
- ☐ pH not in range
- ☐ Insufficient sample volume
- ☐ Sample is biphasic
- ☐ Vials received with headspace
- ☒ Broken container
- ☒ Sufficient sample remains
- ☐ If broken container: Insufficient packing material around container
- ☐ If broken container: Insufficient packing material inside cooler
- ☐ If broken container: Improper handling by carrier: _____
- ☐ If broken container: Sample was frozen
- ☐ If broken container: Container lid not intact
- ☐ Client informed by Call
- ☐ Client informed by Email
- ☐ Client informed by Voicemail
- ☐ Date/Time: _____
- ☐ PM initials: _____
- ☐ Client Contact: _____

Comments

Paul Minnich

6 November 2021 6:50 PM

One OGHEx container for SB-1_SW-1 received broken



Environmental Chemists, Inc.

6602 Windmill Way, Wilmington, NC 28405 • 910.392.0223 Lab • 910.392.4424 Fax
710 Bowsertown Road, Manteo, NC 27954 • 252.473.5702 Lab/Fax
255-A Wilmington Highway, Jacksonville, NC 28540 • 910.347.5843 Lab/Fax

ANALYTICAL & CONSULTING CHEMISTS

info@environmentalchemists.com

Wood-Amec QC - 2021-21368

LCS

<i>Parameter</i>	<i>True Value mg/L</i>	<i>Result mg/L</i>	<i>% Recovery</i>	<i>Limits %</i>
O & G (OPR)	40.0	31.3	78	78-114
O & G (OPR)	40.0	33.4	84	78-114

MS/MSD

<i>Parameter</i>	<i>True Value mg/L</i>	<i>Recovery mg/L</i>	<i>% Recovery</i>	<i>% Difference</i>	<i>Limits % Recovery</i>	<i>Limits % Difference</i>
O & G	40.0	32.1	80	N/A	78-114	≤ 18
O & G	40.0	36.9	92	N/A	78-114	≤ 18

DUPLICATE SAMPLES

<i>Parameter</i>	<i>Results mg/L</i>		<i>% Difference</i>	<i>Limits %</i>
O & G	N/A	N/A	N/A	N/A
O & G	N/A	N/A	N/A	N/A

BLANK

<i>Parameter</i>	<i>Results mg/L</i>	<i>Limit mg/L</i>
O & G	<5.0	5
O & G	<5.0	5

Sample Receipt Checklist

Client: Wood Date: 12/2/21 Report Number: 2021-21368

Receipt of sample:		EChem Pickup <input type="checkbox"/>	Client Delivery <input checked="" type="checkbox"/>	UPS <input type="checkbox"/>	FedEx <input type="checkbox"/>	Other <input type="checkbox"/>
<input type="checkbox"/> YES	<input type="checkbox"/> NO	<input checked="" type="checkbox"/> N/A	1. Were custody seals present on the cooler?			
<input type="checkbox"/> YES	<input type="checkbox"/> NO	<input checked="" type="checkbox"/> N/A	2. If custody seals were present, were they intact/unbroken?			
Original temperature upon receipt _____ °C		Corrected temperature upon receipt _____ °C				
How temperature taken:		<input type="checkbox"/> Temperature Blank <input checked="" type="checkbox"/> Against Bottles				
IR Gun ID: Thomas Traceable S/N 192511657		IR Gun Correction Factor °C: 0.0				
<input checked="" type="checkbox"/> YES	<input type="checkbox"/> NO	3. If temperature of cooler exceeded 6°C, was Project Mgr./QA notified?				
<input checked="" type="checkbox"/> YES	<input type="checkbox"/> NO	4. Were proper custody procedures (relinquished/received) followed?				
<input checked="" type="checkbox"/> YES	<input type="checkbox"/> NO	5. Were sample ID's listed on the COC?				
<input checked="" type="checkbox"/> YES	<input type="checkbox"/> NO	6. Were samples ID's listed on sample containers?				
<input checked="" type="checkbox"/> YES	<input type="checkbox"/> NO	7. Were collection date and time listed on the COC?				
<input checked="" type="checkbox"/> YES	<input type="checkbox"/> NO	8. Were tests to be performed listed on the COC?				
<input checked="" type="checkbox"/> YES	<input type="checkbox"/> NO	9. Did samples arrive in proper containers for each test?				
<input checked="" type="checkbox"/> YES	<input type="checkbox"/> NO	10. Did samples arrive in good condition for each test?				
<input checked="" type="checkbox"/> YES	<input type="checkbox"/> NO	11. Was adequate sample volume available?				
<input checked="" type="checkbox"/> YES	<input type="checkbox"/> NO	12. Were samples received within proper holding time for requested tests?				
<input checked="" type="checkbox"/> YES	<input type="checkbox"/> NO	13. Were acid preserved samples received at a pH of <2? *				
<input type="checkbox"/> YES	<input type="checkbox"/> NO	14. Were cyanide samples received at a pH >12?				
<input type="checkbox"/> YES	<input type="checkbox"/> NO	15. Were sulfide samples received at a pH >9?				
<input type="checkbox"/> YES	<input type="checkbox"/> NO	16. Were NH3/TKN/Phenol received at a chlorine residual of <0.5 m/L? **				
<input type="checkbox"/> YES	<input type="checkbox"/> NO	17. Were Sulfide/Cyanide received at a chlorine residual of <0.5 m/L?				
<input type="checkbox"/> YES	<input type="checkbox"/> NO	18. Were orthophosphate samples filtered in the field within 15 minutes?				

* TOC/Volatiles are pH checked at time of analysis and recorded on the benchsheet.

** Bacteria samples are checked for Chlorine at time of analysis and recorded on the benchsheet.

Sample Preservation: (Must be completed for any sample(s) incorrectly preserved or with headspace)
 Sample(s) _____ were received incorrectly preserved and were adjusted accordingly
 by adding (circle one): H₂SO₄ HNO₃ HCl NaOH
 Time of preservation: _____ If more than one preservative is needed, notate in comments below

Note: Notify customer service immediately for incorrectly preserved samples. Obtain a new sample or
 notify the state lab if directed to analyzed by the customer. Who was notified, date and time: _____

Volatiles Sample(s) _____ were received with headspace

COMMENTS:



NCDENR: DWQ CERTIFICATION # 94 NCDHHS: DIS CERTIFICATION # 37728

6602 Windmill Way Wilmington, NC 28405
OFFICE: 910-392-0223 FAX 910-392-4424
info@environmentalchemie.com

Client: Wood Env & Infra

PROJECT NAME: *Penkley Dam*

REPORT NO: 71-21318

ADDRESS: 5710 Chandler Dr.

CONTACT NAME: Chris Leung

PO NO:

Williamster, Wc

REPORT TO: Chris Frezza

PHONE/FAX:

COPY TO:

email:

Sampled By:

SAMPLE TYPE: I = Influent, E = Effluent, W = Well, ST = Stream, SO = Soil, SL = Sludge, Other:

NOTICE - DECHLORINATION: Samples for Ammonia, TKN, Nitrite, Chloride and DO.

Transfer	Belinauistad Bv.
----------	------------------

chlorinated (0.5

time of collection

ns

	Emergency By:	Date/Time	Received By:	Date/Time
1.	<i>[Signature]</i>	12/2/21 4:00	<i>[Signature]</i>	12-2-21 9:09
2.				

Temperature when Received °C:

Accente

Projected:

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100
---	---	---	---	---	---	---	---	---	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	-----

Delivered By:

Price. _____

Resample Request

Comments:

Received By:

Date: 1/2/21

TURNAROUND:


Report to: Chris Freeman Wood EI
 Chris. Freeman @ woodellc. com
 910 731-2955

Appendix C

Erosion and Sedimentation Control Plan

FORMER BASF PLANT SITE: DEMOLITION
EROSION AND SEDIMENT CONTROL PLAN
NEW HANOVER AND PENDER COUNTY, NORTH CAROLINA


Latitude: 34.33476389° N, Longitude 78.00523056° W

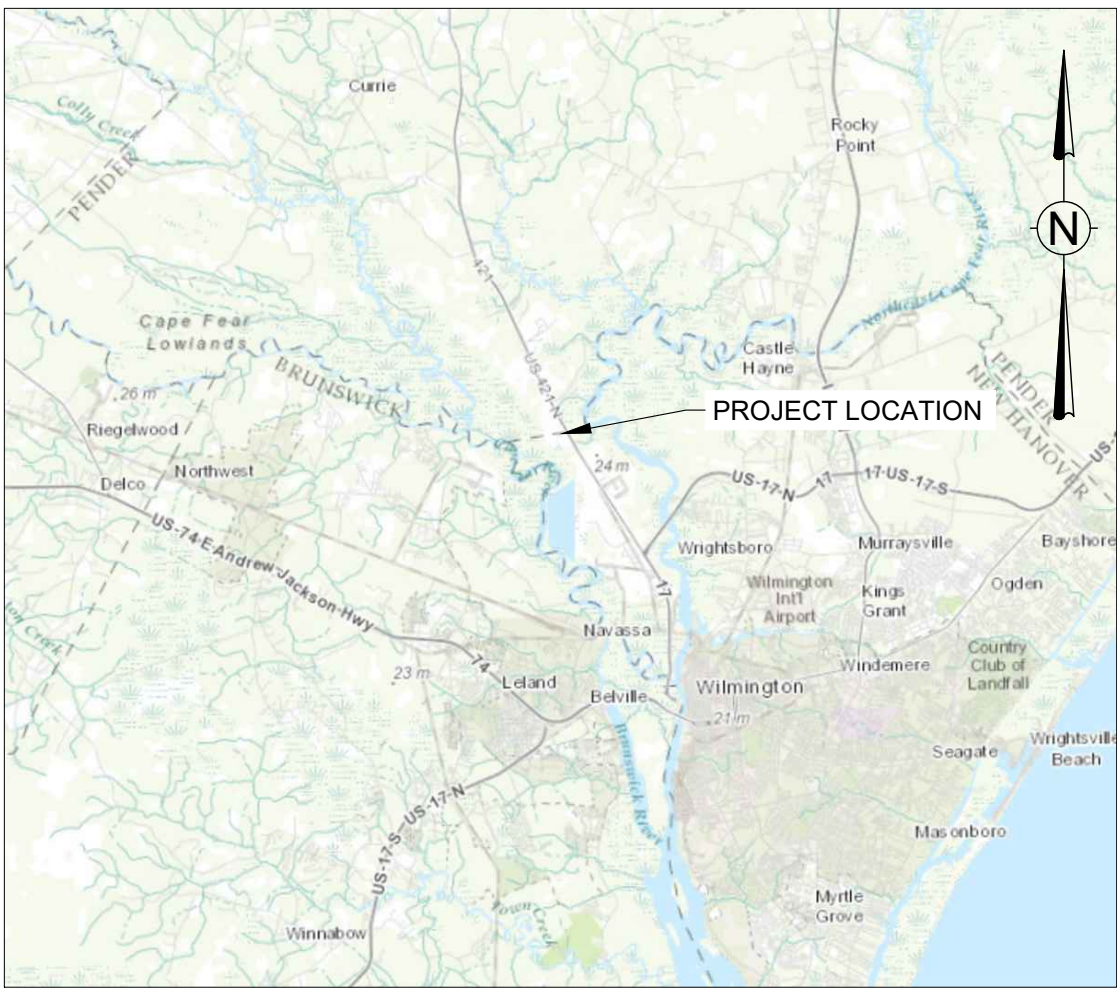

SITE VICINITY MAP - 1" = 5 MILES
MAP SOURCE: ESRI WORLD TOPOGRAPHIC BASEMAP



SITE VICINITY MAP - 1" = 500'
MAP SOURCE: NC ONEMAP: <https://nconemap.maps.arcgis.com/>

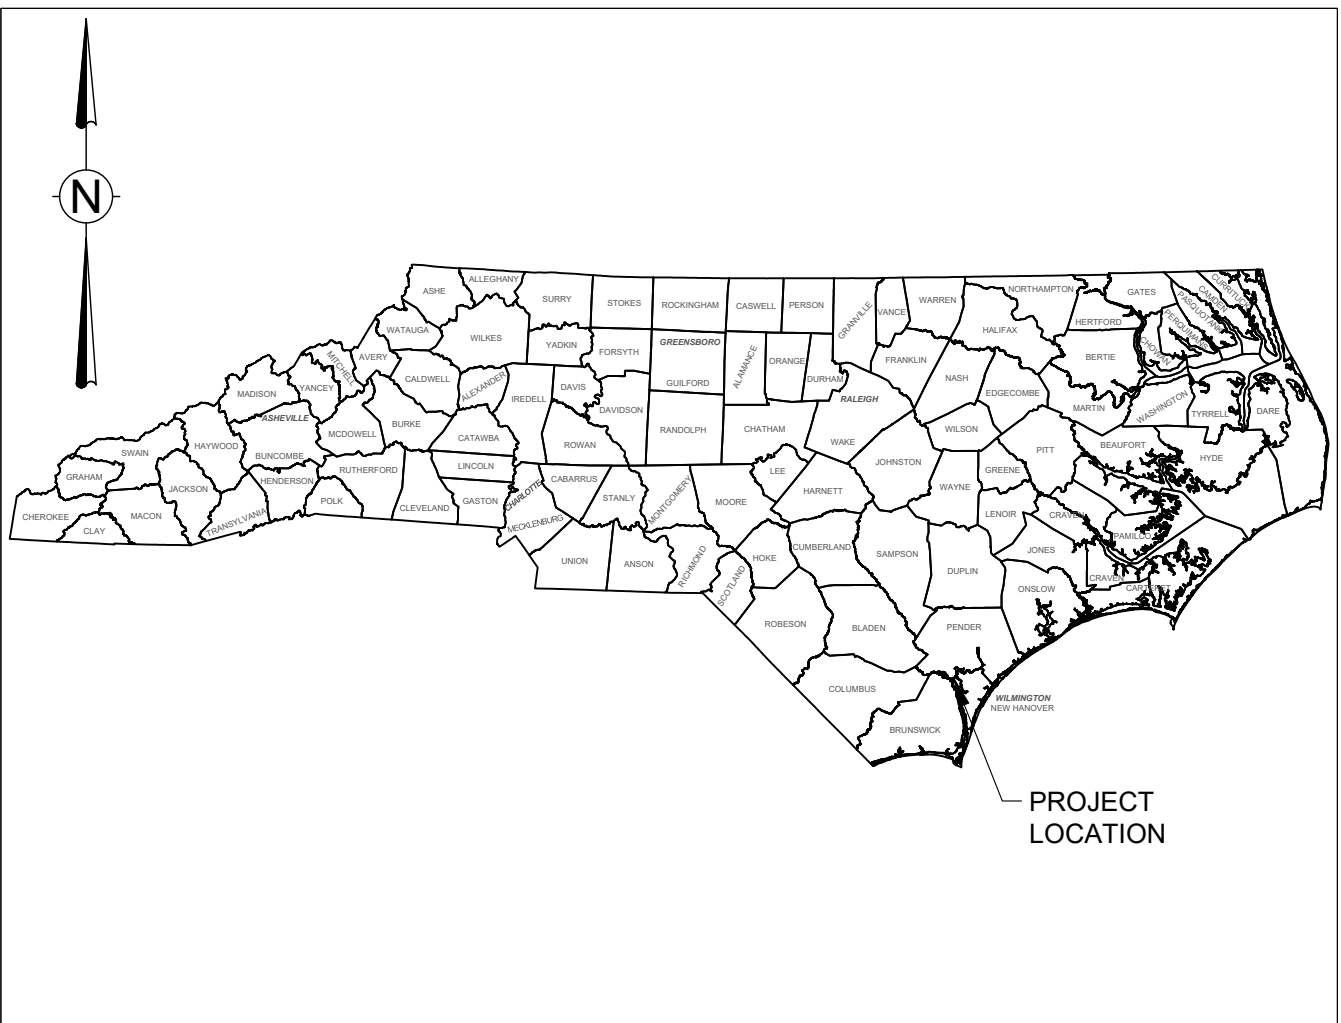

SITE LOCATION MAP
NOT TO SCALE


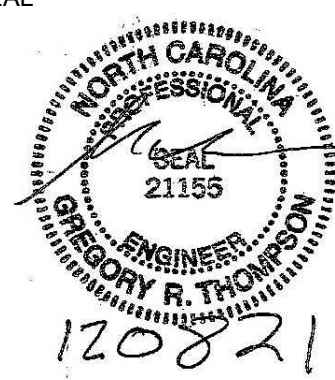


SITE VICINITY MAP - 1" = 5000'
MAP SOURCE: ESRI WORLD TOPOGRAPHIC BASEMAP

Sheet List Table	
Sheet Number	Sheet Title
SHEET 001	COVER SHEET
SHEET 002	GENERAL NOTES
SHEET 003	EXISTING CONDITIONS
SHEET 004	DEMOLITION PLAN
SHEET 005	E&SC DETAILS
SHEET 006	NCG01 NOTES

CONTACT INFORMATION

OWNER:	PENDER COUNTY	ENGINEERING FIRM:	WOOD ENVIRONMENT & INFRASTRUCTURE SOLUTIONS
ADDRESS:	805 SOUTH WALKER STREET BURGAW, NC 28425	ADDRESS:	5710 OLEANDER DR, SUITE 110 WILMINGTON, NC 28403
CONTACT:	CHAD MCEWEN, COUNTY MANAGER	ENGINEER:	GREGORY THOMPSON
PHONE:	(910) 259-1200	PHONE:	(910) 228-4743
EMAIL:	CMCEWEN@PENDERCOUNTYNC.GOV	EMAIL:	GREGORY.THOMPSON@WOODPLC.COM

 Environment & Infrastructure Solutions 5710 OLEANDER DRIVE, SUITE 110 WILMINGTON, NC 28403 TEL: (910) 452-1155 FAX: (844) 648-9591 LICENSEURE: NC ENG: F-1253 NC GEOLOGY: C-247	TITLE FORMER BASF PLANT SITE: DEMOLITION EROSION AND SEDIMENT CONTROL PLAN			
	COVER SHEET			
	FOR ISSUED FOR PERMIT			
	 120821	PENDER COUNTY	SCALE: AS SHOWN	DES: WMN
			DWG TYPE: DWG	DFTR: WMN
ANSI D 22"x34"		REVISION		
FILENAME: SHEET 001 COVER SHEET.dwg		APPD: CP		
JOB NO: 6228210243		CHKD: GT		
DATE: 12/08/2021		ENGR: GT		
DRAWING NO.		SHEET 001		
0		0		

0	12/08/2021	6228210243	CIVIL	WMN	WMN	GT	GT	CP	ISSUED FOR PERMIT
REV	DATE	JOB NO.	PROJECT TYPE	DES	DFTR	CHKD	ENGR	APPD	DESCRIPTION

2

3

4

5

6

7

8

SHEET 002

REV. 0

PROJECT DESCRIPTION:

THE INTENT OF THIS PROJECT IS TO DECOMMISSION AND DEMOLISH EXISTING STRUCTURES, ROADS AND UNDERGROUND UTILITIES AT THE FORMER BASF PLANT LOCATED IN NEW HANOVER AND PENDER COUNTIES, NC. THIS DEISN PLAN PROVIDES EROSION AND SEDIMENT CONTROL MEASURES FOR THE DEMOLITION PLAN.

LIMITS OF DISTURBANCE = 75 ACRES

PARCEL INFORMATION:
ADDRESS: 101 VITAMIN DRIVE, WILMINGTON, NC 28401
PIN: 2291-84-9960-0000
DB/PG: 3859/338
MB/PG: 53/19

STORMWATER RUNOFF FROM THE SITE DISCHARGES TO CAPE FEAR RIVER (WATER SURFACE CLASSIFICATION C:SW) WHICH IS LOCATED WITHIN THE CAPE FEAR RIVER BASIN.

SCHEDULE:

THE PROJECT IS SCHEDULED TO BEGIN IN DECEMBER OF 2021.

EROSION AND SEDIMENTATION CONTROL NARRATIVE:

THE EROSION AND SEDIMENT CONTROL MEASURES FOR THIS PROJECT INVOLVE THE PLACEMENT OF A VARIETY OF EROSION AND SEDIMENT CONTROL DEVICES AT STRATEGIC LOCATIONS THROUGHOUT THE AREA. THESE MEASURES INCLUDE:

- CONSTRUCTION ENTRANCE
- TEMPORARY/PERMANENT SEEDING
- SILT FENCE
- TEMPORARY ROCK CHECK DAMS

THESE DEVICES ARE TO BE INSTALLED PER THE CONSTRUCTION SEQUENCE PRIOR TO CONSTRUCTION ACTIVITIES. ADDITIONAL CONTROL DEVICES MAY BE REQUIRED DURING THE DEMOLITION WORK TO CONTROL EROSION AND/OR OFF-SITE SEDIMENTATION AS NEEDED. CONTRACTOR IS ENCOURAGED TO LIMIT THE DISTURBED AREAS TO MINIMIZE EROSION AND SEDIMENTATION AND TO STABILIZE DISTURBED AREAS AS QUICKLY AS POSSIBLE. THE OWNER OR OWNER'S REPRESENTATIVE WILL CONDUCT INSPECTION AND MAINTENANCE ACTIVITIES DURING THE SERVICE LIFE OF THE MEASURES. ALL TEMPORARY CONTROL DEVICES SHALL BE REMOVED ONCE CONSTRUCTION IS COMPLETE AND THE SITE IS STABILIZED.

GENERAL EROSION CONTROL NOTES:

- CONSTRUCTION ACTIVITIES THAT HAVE AN EROSION AND SEDIMENT CONTROL PLAN APPROVED ON OR AFTER APRIL 1, 2019 ARE REQUIRED TO FILL OUT AND SUBMIT AN ELECTRONIC NOTICE OF INTENT (e-NOI) FORM. ALL CONSTRUCTION ACTIVITIES ARE REQUIRED TO FOLLOW THE NEW NCGOI PERMIT REGARDLESS OF WHEN THEY WERE APPROVED.
- EROSION AND SEDIMENT CONTROL (E&SC) PERMIT AND A CERTIFICATE OF COVERAGE (COC) MUST BE OBTAINED BEFORE ANY LAND DISTURBING ACTIVITIES OCCUR. THE COC CAN BE OBTAINED BY FILLING OUT THE ELECTRONIC NOTICE OF INTENT (e-NOI) FORM AT deq.nc.gov/ncgoi. PLEASE NOTE, THE e-NOI FORM MAY ONLY BE FILLED OUT ONCE THE PLANS HAVE BEEN APPROVED. A COPY OF THE E&SC PERMIT, THE COC, AND A HARD COPY OF THE PLAN MUST BE KEPT ON SITE, PREFERABLY IN A PERMITS BOX, AND ACCESSIBLE DURING INSPECTION.
- ALL EROSION CONTROL DEVICES SHALL BE PROPERLY MAINTAINED DURING WORK UNTIL THE COMPLETION OF ACTIVITIES AND DISTURBED AREAS HAVE BEEN STABILIZED. TEMPORARY EROSION CONTROL DEVICES SHALL BE REMOVED ONCE WORK IS COMPLETE AND THE SITE IS STABILIZED.
- SEDIMENT AND EROSION CONTROL DEVICES AND PLANTED AREAS SHALL BE INSPECTED BY THE OWNER OR THEIR REPRESENTATIVE EVERY SEVEN (7) CALENDAR DAYS AND AFTER EACH RAINFALL OCCURRENCE THAT EXCEEDS ONE INCH IN A 24-HOUR PERIOD. DAMAGED OR INEFFECTIVE DEVICES SHALL BE REPAIRED OR REPLACED, AS NECESSARY, AS SOON AS PRACTICAL.
- SEEDED AREAS SHALL BE FERTILIZED, RESEEDDED AS NECESSARY AND MULCHED ACCORDING TO THE SEEDING PLAN TO MAINTAIN A VIGOROUS, DENSE VEGETATIVE COVER. SEEDED AREAS SHALL BE INSPECTED PERIODICALLY BY OWNER UNTIL FINAL GROUND COVER HAS BEEN ESTABLISHED. THE CONTRACTOR IS RESPONSIBLE FOR RESTORING VEGETATION TO ITS ORIGINAL CONDITION, OR BETTER, FOR UP TO A YEAR.
- THE OWNER OR THEIR AGENT SHOULD ADHERE TO THE SELF-INSPECTION PROGRAM FOR EROSION AND SEDIMENT CONTROL (EFFECTIVE OCTOBER 1, 2010). DETAILS OF THE PROGRAM AND RECOMMENDED INSPECTION FORMS CAN BE FOUND AT THE FOLLOWING WEBSITE: <https://deq.nc.gov/about/divisions/energy-mineral-land-resources/erosion-sediment-control/forms>
- THE OWNER'S CONTRACTOR IS RESPONSIBLE FOR NOTIFYING UTILITY COMPANIES TO LOCATE ALL UNDERGROUND UTILITIES PRIOR TO ANY DISTURBANCE.
- STABILIZATION MEASURES SHALL BE INITIATED AS SOON AS PRACTICABLE IN PORTIONS OF THE SITE WHERE ACTIVITIES HAVE TEMPORARILY OR PERMANENTLY CEASED, BUT IN NO CASE MORE THAN SEVEN (7) DAYS FOR PERIMETER AREAS, SLOPES STEEPER THAN 3H : 1V, AND SLOPES BETWEEN 3H : 1V AND 4H : 1V HAVING A LENGTH GREATER HAN 50 FEET; NO MORE THAN FOURTEEN (14) DAYS FOR OTHER AREAS AFTER WORK HAS CEASED.
- PROVIDE SILT FENCE AND/OR OTHER CONTROL DEVICES, AS MAY BE REQUIRED, TO CONTROL SOIL EROSION DURING WORK. DISTURBED AREAS SHALL BE CLEANED, GRADED, AND STABILIZED WITH GRASSING, AS SOON AS PRACTICABLE.
- WHEN THE PROJECT IS COMPLETE, THE PERMITTEE SHALL CONTACT DEMLR TO CLOSE OUT THE E&SC PLAN. AFTER DEMLR INFORMS THE PERMITTEE OF THE PROJECT CLOSE OUT, VIA INSPECTION REPORT, THE PERMITTEE SHALL VISIT deq.nc.gov/ncgoi TO SUBMIT AN ELECTRONIC NOTICE OF TERMINATION (e-NOT). A \$100 ANNUAL GENERAL PERMIT FEE WILL BE CHARGED UNTIL THE e-NOT HAS BEEN FILLED OUT.

STANDARDS:

ALL EROSION AND SEDIMENTATION CONTROLS SHALL BE IN ACCORDANCE WITH THE NORTH CAROLINA SEDIMENTATION POLLUTION CONTROL ACT OF 1973. CONSTRUCTION DETAILS AND SPECIFICATIONS WITHIN THIS PLAN WERE DERIVED FROM THE EROSION AND SEDIMENT CONTROL PLANNING AND DESIGN MANUAL DATED MAY, 2013, PREPARED BY THE NORTH CAROLINA SEDIMENTATION CONTROL COMMISSION, NORTH CAROLINA DEPARTMENT OF ENVIRONMENTAL QUALITY (NCDEQ) AND NORTH

CAROLINA AGRICULTURAL EXTENSION SERVICE (NCAES).

CONSTRUCTION AND EROSION CONTROL SEQUENCE:

PRIOR TO COMMENCING LAND DISTURBING ACTIVITIES IN ANY PROJECT AREA THE CONTRACTOR SHALL COMPLETE THE FOLLOWING:

PERMITTING SEQUENCE:

- OBTAIN ALL RELEVANT PERMITS INCLUDING BUT NOT LIMITED TO THE E&SC PERMIT AND COC.
- FILL OUT AND SUBMIT AN ELECTRONIC NOTICE OF INTENT (E-NOI) FORM TO DEMLR.
- 48 HOURS PRIOR TO BEGINNING WORK, CONTACT NCDEQ LAND QUALITY AT 910-796-7215 TO NOTIFY OF PROJECT START DATE.
- CONTRACTOR MOBILIZATION TO SITE.
- HOLD PRE-CONSTRUCTION MEETING WITH THE OWNER, ENGINEER OF RECORD, AND ALL CONTRACTORS AND SUBCONTRACTORS INVOLVED WITH LAND DISTURBANCE.
- EROSION AND SEDIMENT CONTROL (E&SC) PERMIT AND A CERTIFICATE OF COVERAGE (COC) MUST BE OBTAINED BEFORE ANY LAND DISTURBING ACTIVITIES OCCUR. A COPY OF THE E&SC PERMIT, THE COC, AND A HARD COPY OF THE PLAN MUST BE KEPT ON SITE, PREFERABLY IN A PERMITS BOX, AND ACCESSIBLE DURING INSPECTION. THE COC CAN BE OBTAINED BY FILLING OUT THE ELECTRONIC NOTICE OF INTENT (e-NOI) FORM AT deq.nc.gov/ncgoi. PLEASE NOTE, THE E-NOI FORM MAY ONLY BE FILLED OUT ONCE THE PLANS HAVE BEEN APPROVED.
- THE CONTRACTOR SHALL LOCATE AND VERIFY ALL UNDERGROUND UTILITIES PRIOR TO COMMENCEMENT TO ANY LAND DISTURBANCE. THE CONTRACTOR SHALL BE RESPONSIBLE FOR REPAIR OR REPLACEMENT OF ANY UTILITIES, CABLES, PIPES, OR OTHER UNDERGROUND CONVEYANCES SCHEDULED TO REMAIN THAT ARE DESTROYED OR DAMAGED BY THE CONTRACTOR, INCLUDING ANY SUBCONTRACTORS, DURING THE PROJECT.
- THE CONTRACTOR SHALL CONDUCT SELF-INSPECTIONS OF THE EROSION AND SEDIMENTATION CONTROL MEASURES FOLLOWING COMBINED SELF-INSPECTION FORM FOUND ON THE DEMLR WEBSITE: <https://deq.nc.gov/about/divisions/energy-mineral-land-resources/erosion-sediment-control/forms>.
- SELF-INSPECTIONS FOR EROSION AND SEDIMENTATION CONTROL MEASURES ARE TO BE PERFORMED AT LEAST ONCE EVERY SEVEN CALENDAR DAYS AND WITHIN 24 HOURS OF EVERY RAIN EVENT OF GREATER THAN 1-INCH. ANY NEEDED REPAIRS SHALL BE MADE IMMEDIATELY TO MAINTAIN AS SPECIFIED IN THE CONSTRUCTION DETAILS ON THIS PLAN. A RAIN GAUGE SHALL BE INSTALLED AT THE PROJECT SITE FOR MONITORING.
- ALL CONTROL DEVICES SHALL BE MAINTAINED AS SPECIFIED IN THE NCDEQ EROSION AND SEDIMENT CONTROL PLANNING AND DESIGN MANUAL. A RAIN GAUGE SHALL BE INSTALLED AT THE PROJECT SITE TO FACILITATE RAINFALL MONITORING. THE CONTRACTOR SHALL MAINTAIN THESE RECORDS IN THE PERMIT BOX FOR AUDIT BY REGULATORY AGENCIES.

EROSION AND SEDIMENT CONTROL SEQUENCE:

- INSTALL CONSTRUCTION ENTRANCE(S).
- THE CONTRACTOR SHALL CLEARLY DEMARCATE THE LIMITS OF DISTURBANCE. THE LIMITS SHALL BE CLEARLY AND ACCURATELY DEMARCATED WITH STAKES, RIBBONS, OR OTHER APPROPRIATE VISUAL MARKING DEVICES. THE LIMITS OF DISTURBANCE SHALL BE MAINTAINED FOR THE DURATION OF THE PROJECT. NO LAND DISTURBANCE SHALL OCCUR OUTSIDE THE APPROVED LIMITS OF DISTURBANCE INDICATED ON THE DRAWINGS WITHOUT APPROVAL BY THE OWNER.
- INSTALL PERIMETER EROSION CONTROL MEASURES, CLEARING ONLY THE AREA NECESSARY TO INSTALL THE MEASURES. MEASURES TO BE INSTALLED MAY INCLUDE SILT FENCE AND ROCK CHECK DAMS AS SHOWN ON THE DRAWINGS.
- VERIFY THROUGHOUT CONSTRUCTION THAT ALL EROSION CONTROL MEASURES ARE IN PLACE AND NO ADDITIONAL MEASURES ARE NECESSARY.
- STABILIZATION SHALL BE ESTABLISHED ON ALL DISTURBED AREAS WITHIN 7 OR 14 DAYS OF COMPLETION OF ANY PHASE OF GRADING ACTIVITIES OR WHERE CONSTRUCTION WILL TEMPORARILY CEASE FOR MORE THAN 7-14 CALENDAR DAYS. SEE THE STABILIZATION TIME FRAME ON SHEET.
- AFTER SITE IS PERMANENTLY STABILIZED, CONTACT THE DEMLR EROSION CONTROL INSPECTOR PRIOR TO REMOVAL OR MODIFICATION OF EROSION CONTROL DEVICES.
- REMOVE ALL TEMPORARY EROSION CONTROL MEASURES AND PROVIDE PERMANENT SEEDING WHERE TEMPORARY MEASURES HAVE BEEN REMOVED AND GROUND COVER IS NOT ADEQUATE.
- CONTACT DEMLR FOR A CLOSE OUT INSPECTION ONCE ALL EROSION CONTROL MEASURES HAVE BEEN REMOVED AND THE SITE HAS BEEN PERMANENTLY STABILIZED. CONTRACTOR DEMOBILIZES FROM SITE.
- WHEN THE PROJECT IS COMPLETE, THE PERMITTEES SHALL CONTACT DEMLR TO CLOSE OUT THE E&SC PLAN. AFTER THE DEMLR INFORMS THE PERMITTEE OF THE PROJECT CLOSE OUT, VIA INSPECTION REPORT, THE PERMITTEE SHALL VISIT [DEQ.NC.GOV/NCG01](https://deq.nc.gov/ncgoi) TO SUBMIT AND ELECTRONIC NOTICE OF TERMINATION (E-NOT). A \$100 ANNUAL GENERAL PERMIT FEE WILL BE CHARGED UNTIL THE E-NOT HAS BEEN FILLED OUT.

GENERAL NOTES:

- ALL WORK AND MATERIALS SHALL COMPLY WITH ALL COUNTY, STATE AND FEDERAL REGULATIONS AND CODES AND O.S.H.A. STANDARDS.
- THE CONTRACTOR SHALL PROTECT ALL MONUMENTS, IRON PINS, AND PROPERTY CORNERS DURING CONSTRUCTION. THE CONTRACTOR IS RESPONSIBLE FOR REPLACEMENT OF ANY PROPERTY MARKERS DISTURBED DURING CONSTRUCTION.
- STOCKPILES CONTAINED TO WORKING PAD AREAS. STOCKPILES SHALL BE LOCATED UP-GRADIENT OF EROSION AND SEDIMENT CONTROL FEATURES. ADDITIONALLY, ALL STOCKPILES SHALL HAVE

SILT FENCE OR COMPOST STOCK INSTALLED ON THE DOWN-GRADIENT SIDE OF THE STOCKPILE.

- THE CONTRACTOR SHALL ASSUME SOLE AND COMPLETE RESPONSIBILITY FOR JOB SITE CONDITIONS DURING THE COURSE OF CONSTRUCTION OF THIS PROJECT, INCLUDING SAFETY OF ALL PERSONS AND PROPERTY; THIS REQUIREMENT SHALL APPLY CONTINUOUSLY AND IS NOT LIMITED TO NORMAL WORKING HOURS.
- THE CONTRACTOR SHALL MAINTAIN AN ON-GOING DUST CONTROL PROGRAM, INCLUDING WATERING OF DISTURBED AREAS AS NEEDED, IN ORDER TO CONFORM WITH THE LATEST STATE AND FEDERAL AIR POLLUTION REGULATIONS.
- THE CONTRACTORS SHALL HAVE ALL REQUIRED PERMITS PRIOR TO COMMENCEMENT OF ANY WORK.
- THE CONTRACTOR SHALL BE RESPONSIBLE FOR THE DAILY REMOVAL OF ALL CONSTRUCTION MATERIALS SPILLED ON PAVED STREETS, ONSITE, AND OFFSITE.
- THE CONTRACTOR SHALL PURSUE THE WORK IN A CONTINUOUS AND DILIGENT MANNER, CONFORMING TO ALL THE PERTINENT SAFETY REGULATIONS, TO INSURE A TIMELY COMPLETION OF THE PROJECT.
- ALL EXISTING UTILITY LOCATIONS, SIZES, AND DESCRIPTIONS AS SHOWN ON THESE DRAWINGS ARE FROM SURFACE OBSERVATIONS USED IN CONJUNCTION WITH AVAILABLE RECORDS, DRAWINGS, AND WRITTEN OR VERBAL STATEMENTS SUPPLIED BY OTHERS, AND MAY NOT BE WHOLLY ACCURATE OR RELIABLE. IT IS THE CONTRACTORS RESPONSIBILITY TO VERIFY ALL UTILITY LOCATIONS AND SIZES.
- THE WORK IN THIS CONTRACT INCLUDES ALL WORK SHOWN ON THESE DRAWINGS, DESCRIBED IN THE SPECIFICATIONS, OR REASONABLY IMPLIED.
- THE CONTRACTOR SHALL, AT ALL TIMES DURING CONSTRUCTION, PROTECT FROM DAMAGE EXISTING IMPROVEMENTS ON AND AROUND THE SITE, INCLUDING, BUT NOT LIMITED TO, ASPHALT PAVEMENTS, SIGNAGE, SANITARY SEWERS, WATER MAINS, OVERHEAD POWER LINES AND OTHER UTILITIES WITHIN THE PROJECT AREA. CONTRACTOR SHALL AVOID GOING OUTSIDE THE CONSTRUCTION LIMITS SO AS TO MINIMIZE DISTURBANCE OF EXISTING VEGETATION.
- THE CONTRACTOR SHALL ASSUME SOLE RESPONSIBILITY FOR THE REPAIR OF ANY IMPROVEMENTS (EXISTING OR PROPOSED) DAMAGED THROUGHOUT THE COURSE OF CONSTRUCTION.
- THE CONTRACTOR SHALL BE RESPONSIBLE FOR ALL CONSTRUCTION SIGNING, BARRICADING, MAINTENANCE OF TRAFFIC AND TRAFFIC DELINEATION AND SHALL CONFORM TO ALL STATE AND FEDERAL REGULATIONS.
- ALL EROSION CONTROL MEASURES SHALL BE CONSTRUCTED IN ACCORDANCE WITH NCDEQ REGULATIONS.
- ATTENTION IS DRAWN TO THE FACT THAT THE SCALE OF THESE DRAWINGS MAY HAVE BEEN DISTORTED DURING REPRODUCTION PROCESS.
- THIS DOCUMENT, TOGETHER WITH THE CONCEPTS AND DESIGNS PRESENTED HEREIN, AS AN INSTRUMENT OF SERVICE, IS INTENDED ONLY FOR THE SPECIFIC PURPOSE AND CLIENT FOR WHICH IT WAS PREPARED. REUSE OF, OR IMPROPER RELIANCE ON, THIS DOCUMENT WITHOUT WRITTEN AUTHORIZATION AND ADAPTATION BY WOOD ENVIRONMENT AND INFRASTRUCTURE SOLUTIONS SHALL BE WITHOUT LIABILITY TO WOOD ENVIRONMENT AND INFRASTRUCTURE SOLUTIONS.

REFERENCE NOTES:

- EXISTING TOPOGRAPHY DATA AND AERIAL IMAGERY WERE OBTAINED FROM NC ONEMAP .
- SUE SURVEY PROVIDED BY MCKIM & CREED DATED DECEMBER 2021.

wood.

Environment & Infrastructure Solutions
5710 OLEANDER DRIVE, SUITE 110
WILMINGTON, NC 28403
TEL: (910) 452-1185
FAX: (844) 648-9591
LICENSURE:
NC ENG: F-1253
NC GEOLOGY: C-247

SEAL

NORTH CAROLINA

PROFESSIONAL

ENGINEER

21155

GREGORY R. THOMPSON

120821

TITLE

FORMER BASF PLANT SITE:
DEMOLITION EROSION
AND SEDIMENT CONTROL PLAN

GENERAL NOTES

FOR

ISSUED FOR PERMIT

PENDER
COUNTY

SCALE: AS SHOWN
DWG TYPE: DWG
JOB NO: 6228210243
DATE: 12/08/2021

DES: WMN
DFTR: WMN
CHKD: GT
ENGR: GT

FILENAME: SHEET 002 GENERAL NOTES.dwg
DWG SIZE
ANSI D
22"x34"

APPD: CP
REVISION

SHEET 002

0

0

REV

12/08/2021

DATE

6228210243

JOB NO.

CIVIL

PROJECT TYPE

WMN

DES

WMN

DFTR

GT

CHKD

GT

ENGR

CP

APPD

ISSUED FOR PERMIT

DESCRIPTION

INCHES

1

2

3

TENTHS

10

20

30

4

5

6

7

8

9

10

Plotted By:Nichols, William


Sheet Set:Former BASF Demolition E&SC Plan

Layout:SHEET 002 GENERAL NOTES

December 08, 2021


11:37:44am

Q:\BASF\6228210243 Demolition Management Former BASF\Plansheets\Issued for Review\SHEET 002 GENERAL NOTES.dwg

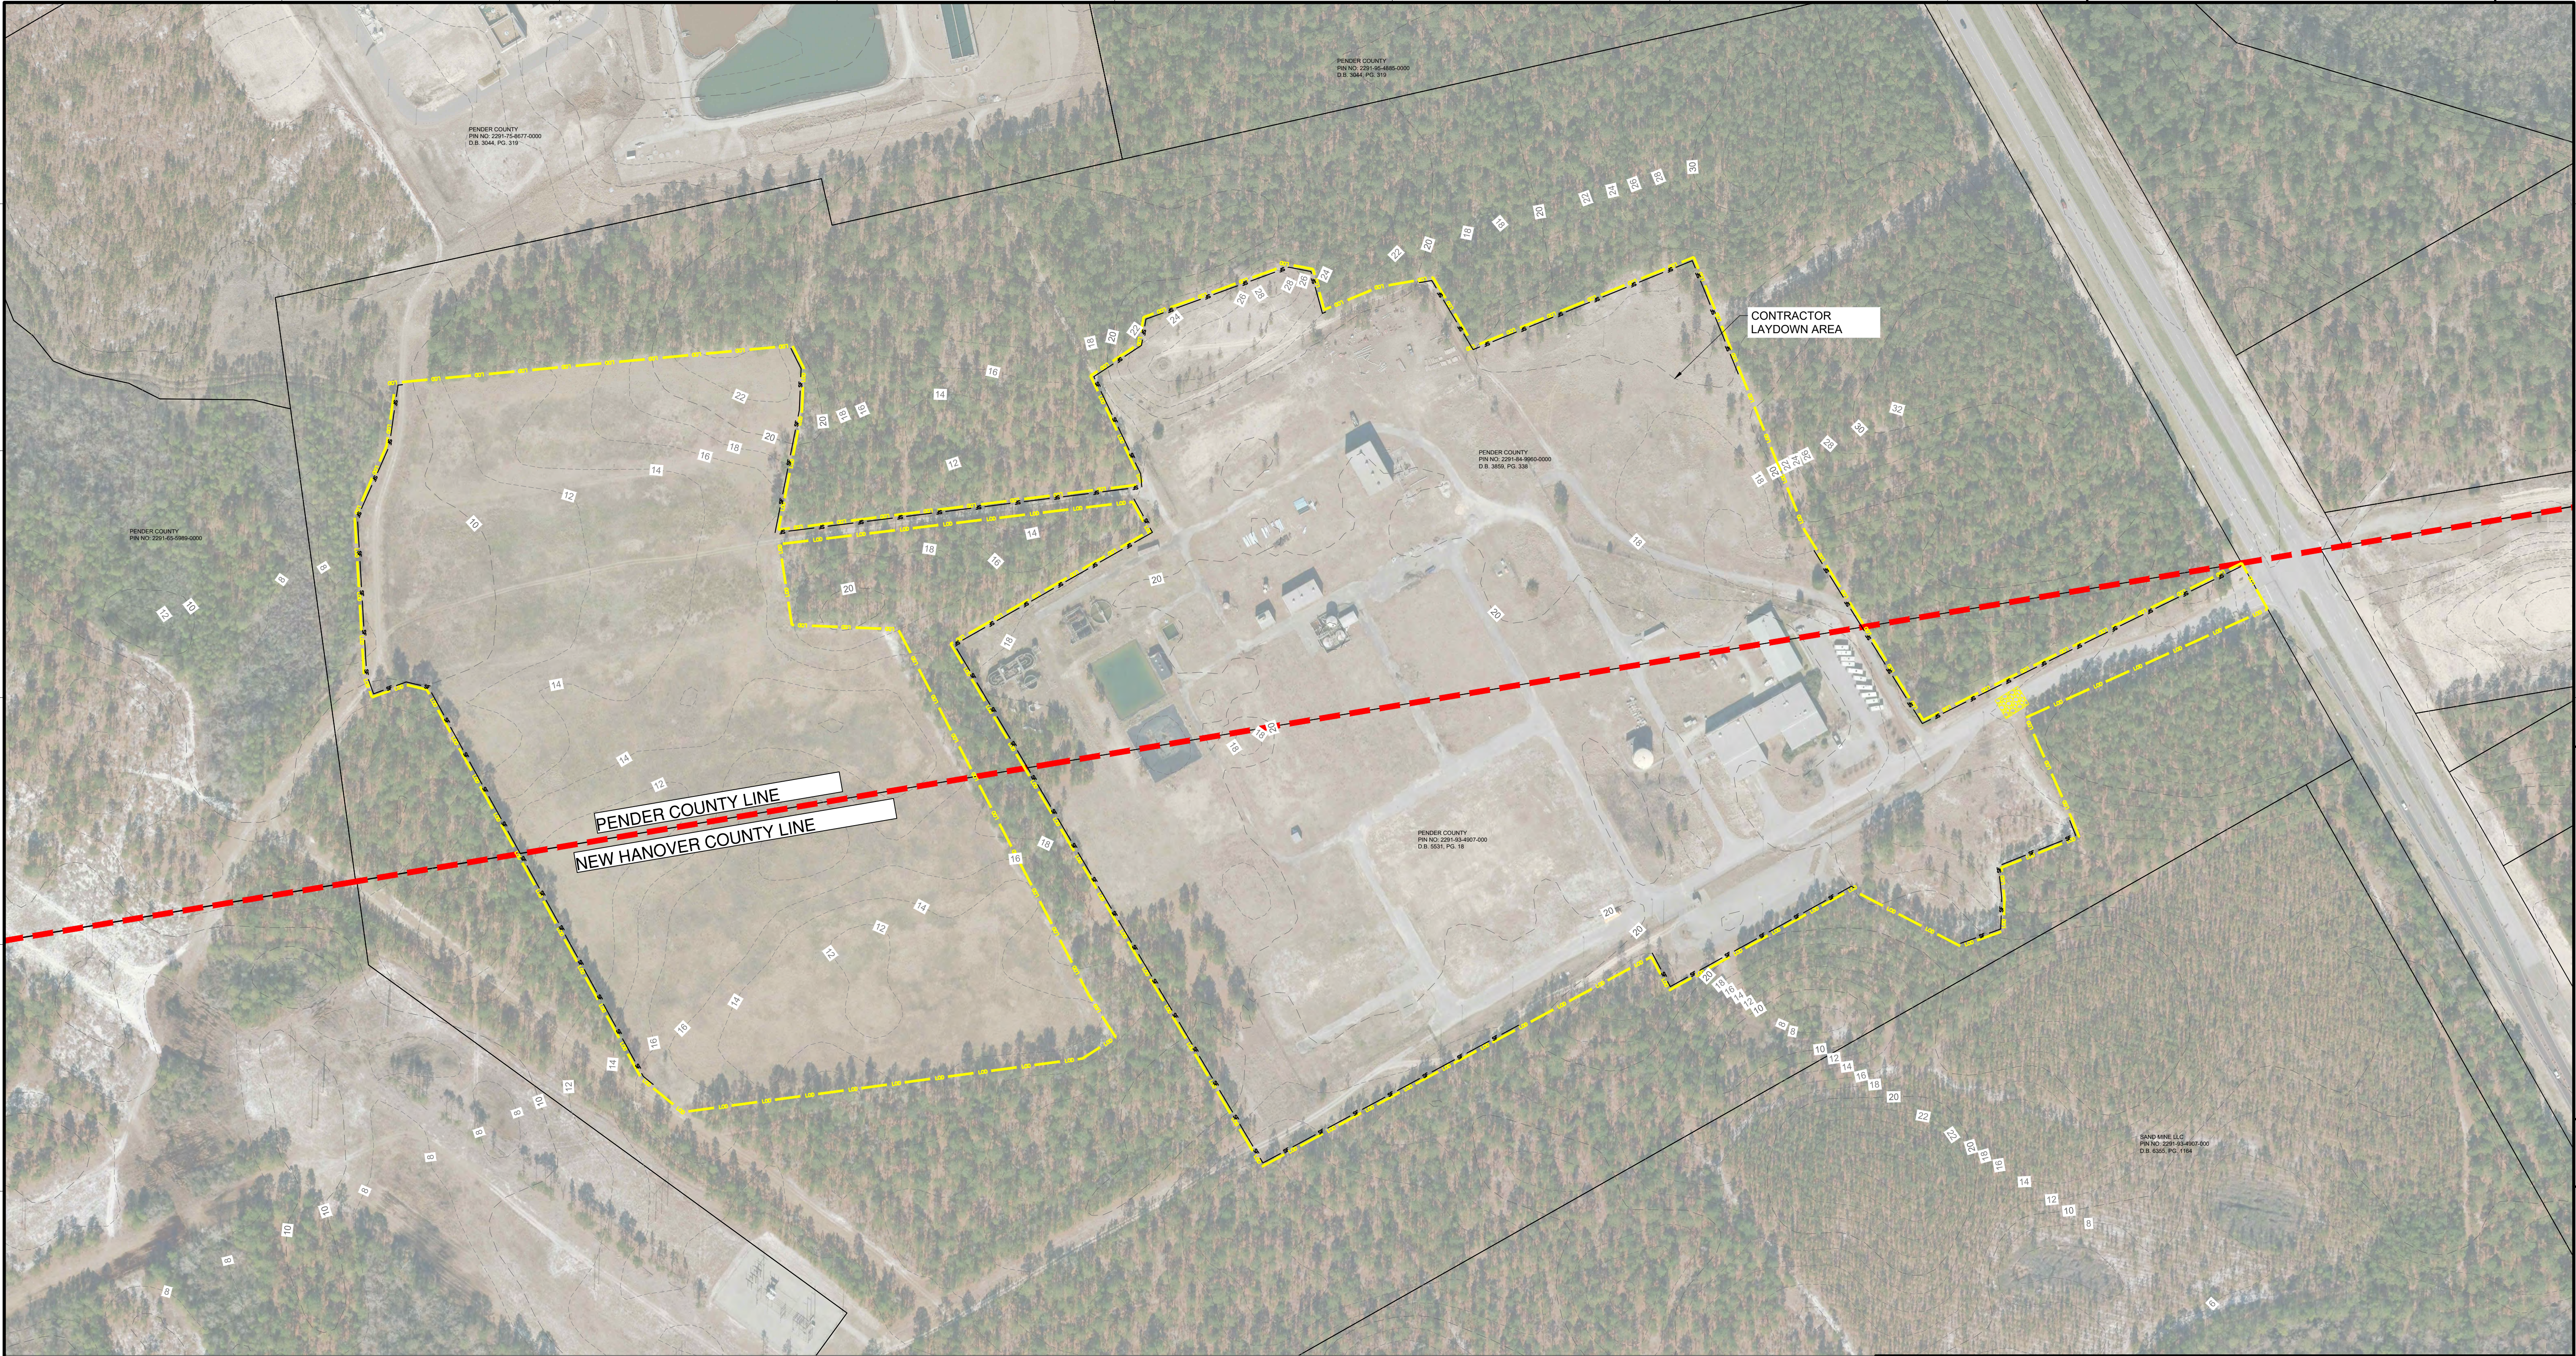

- LEGEND**
- 100 --- EXISTING MAJOR CONTOURS
 - EXISTING MINOR CONTOURS
 - PROPERTY BOUNDARY
 - LIMIT OF DISTURBANCE
 - CONSTRUCTION ENTRANCE
 - SILT FENCE

- REFERENCES:**
1. EXISTING TOPOGRAPHY DATA AND AERIAL IMAGERY WERE OBTAINED FROM NC ONEMAP.
 2. SUE SURVEY PROVIDED BY MCKIM & CREED DATED DECEMBER 2021.
 3. DATUM VALUES ARE BASED ON NADV88.

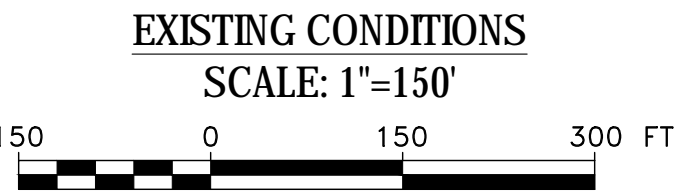


wood.
Environment & Infrastructure Solutions
5710 OLEANDER DRIVE, SUITE 110
WILMINGTON, NC 28403
TEL: (910) 452-1155
FAX: (844) 648-9591
LICENSURE:
NC ENG: F-1253
NC GEOLOGY: C-247

SEAL

TITLE		FORMER BASF PLANT SITE: DEMOLITION EROSION AND SEDIMENT CONTROL PLAN	
FOR		EXISTING CONDITIONS	
ISSUED FOR PERMIT			
PENDER COUNTY	SCALE: AS SHOWN	DES: WMN	
	DWG TYPE: DWG	DFTR: WMN	
	JOB NO: 6228210243	CHKD: GT	
	DATE: 12/08/2021	ENGR: GT	
FILENAME: SHEET 003 EXISTING CONDITIONS.dwg	APPD: CP		
DWG SIZE ANSI D 22"x34"	DRAWING NO.	REVISION	
SHEET 003		0	

0	12/08/2021	6228210243	CIVIL	WMN	WMN	GT	GT	CP	ISSUED FOR PERMIT
REV	DATE	JOB NO.	PROJECT TYPE	DES	DFTR	CHKD	ENGR	APPD	DESCRIPTION

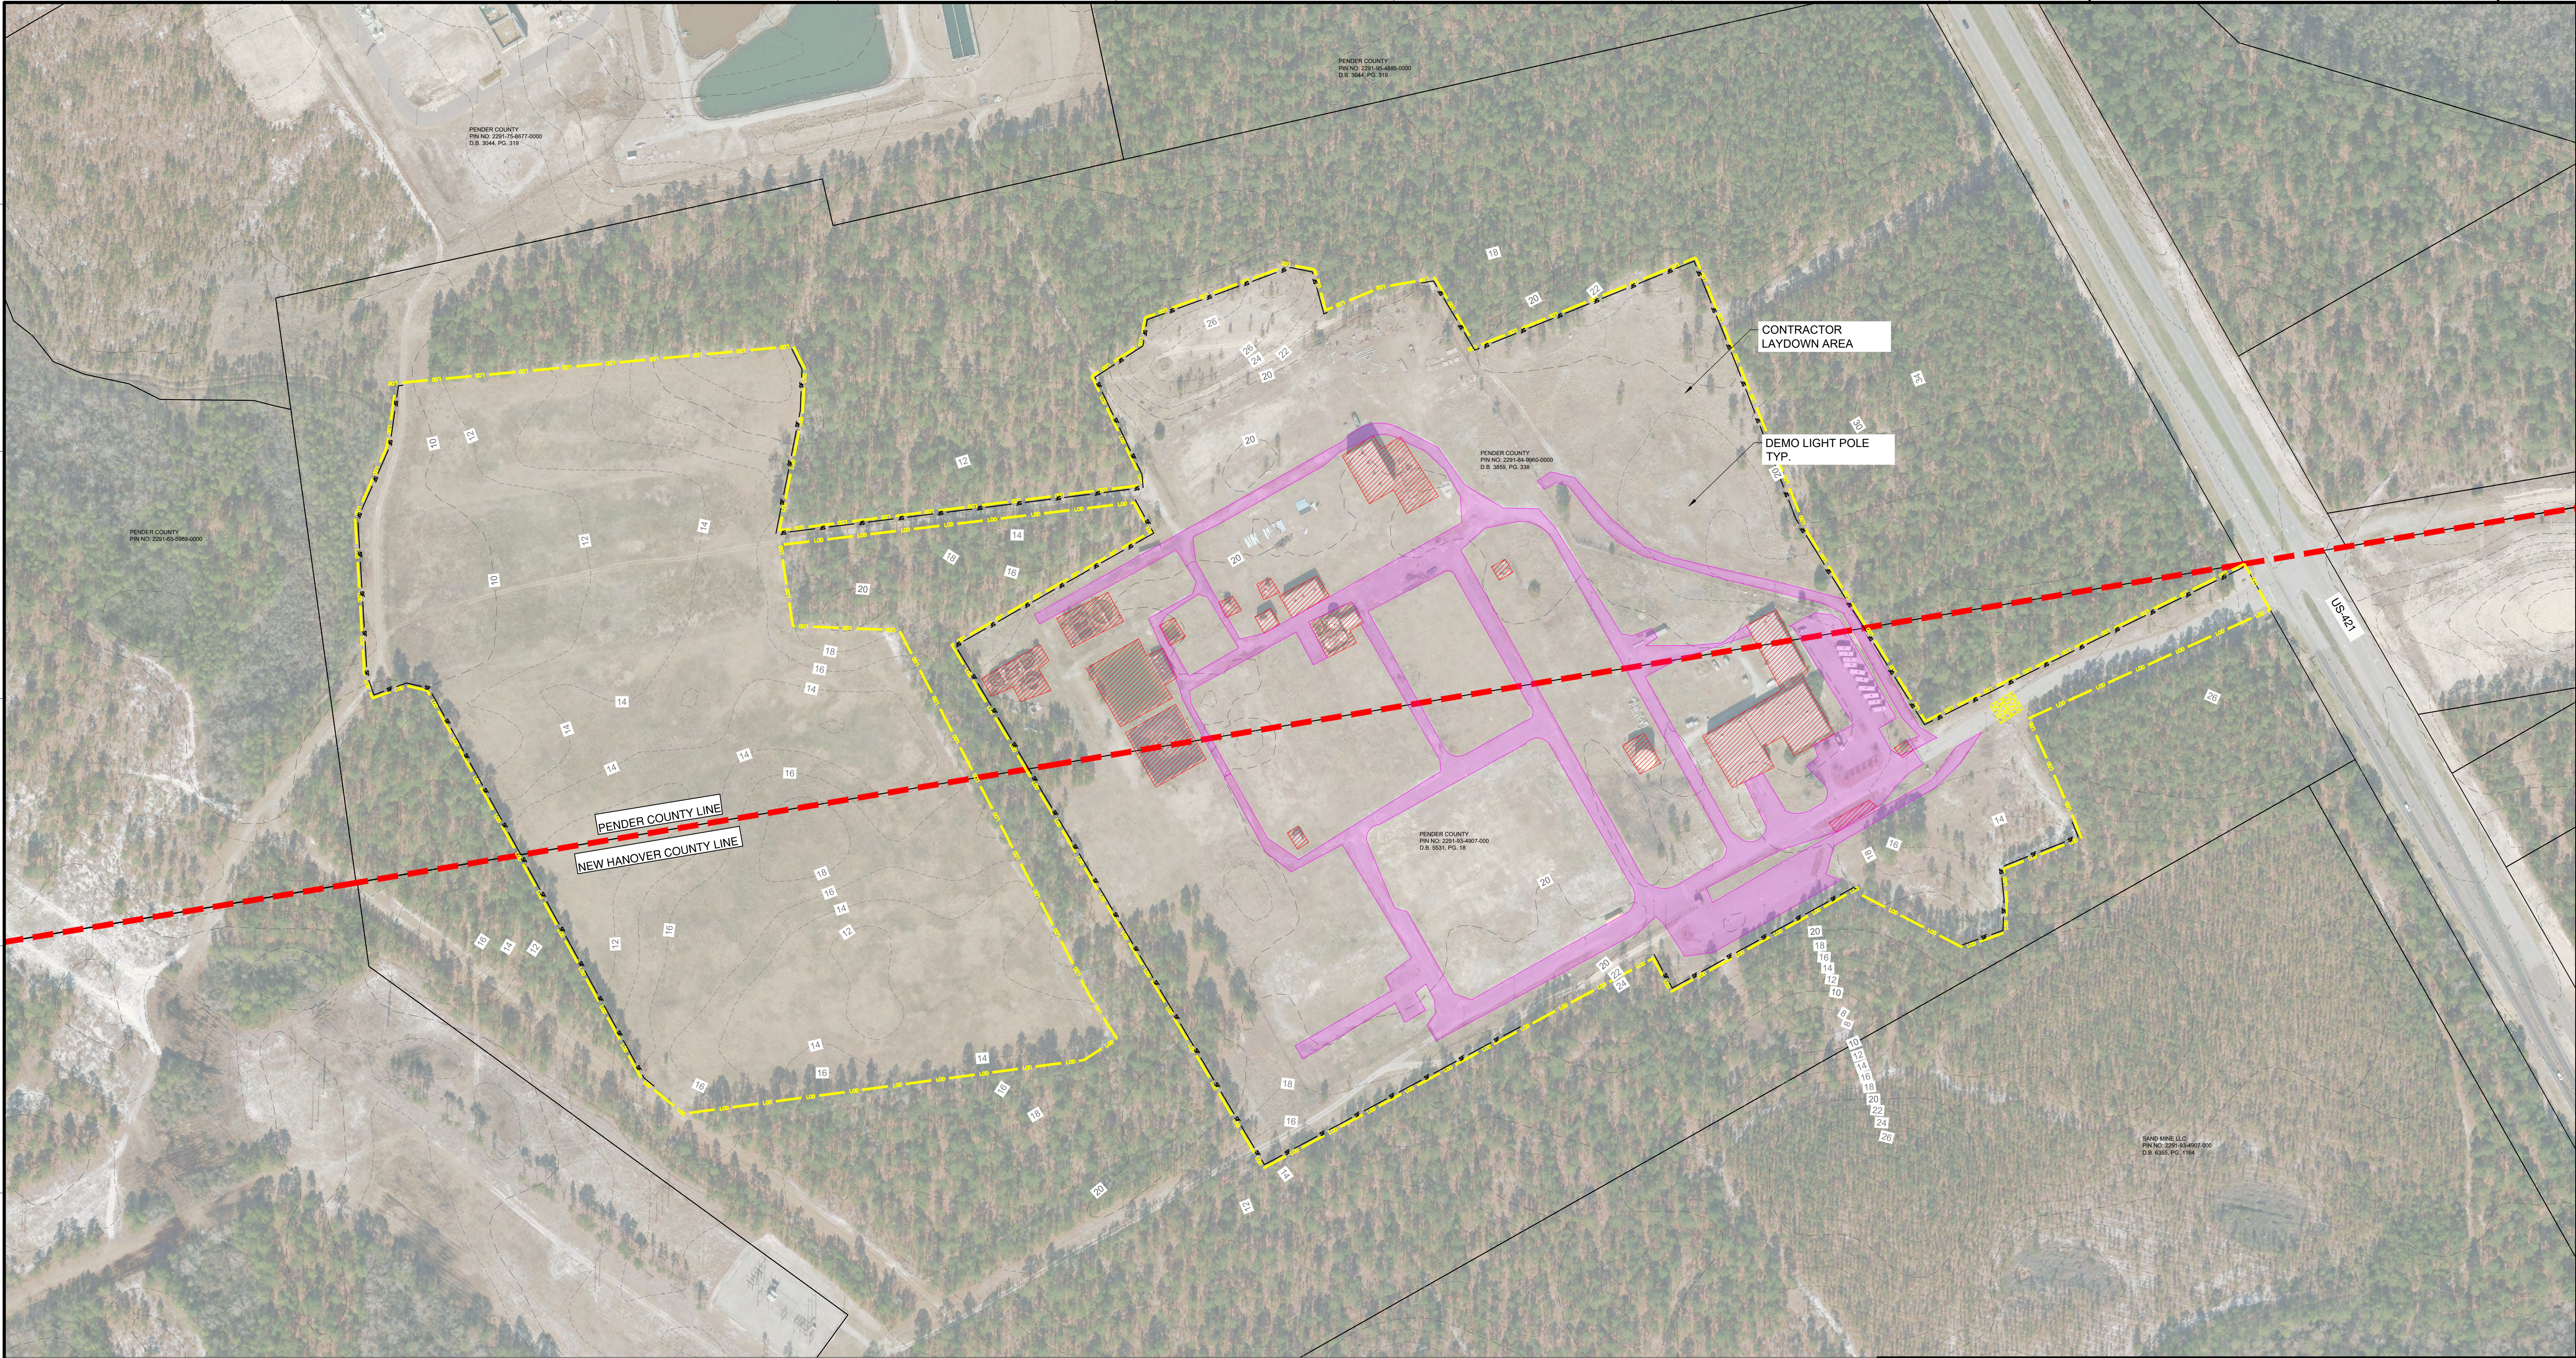

LEGEND

- 100 --- EXISTING MAJOR CONTOURS
- EXISTING MINOR CONTOURS
- PROPERTY BOUNDARY
- LIMIT OF DISTURBANCE
- CONSTRUCTION ENTRANCE
- SILT FENCE
- DEMO STRUCTURES
- DEMO ROADS

DEMOLITION PLAN
SCALE: 1"=150'

150 0 150 300 FT

REFERENCES:

- EXISTING TOPOGRAPHY DATA AND AERIAL IMAGERY WERE OBTAINED FROM NC ONEMAP
- SUE SURVEY PROVIDED BY MCKIM & CREED DATED DECEMBER 2021.
- DATUM VALUES ARE BASED ON NADV88.

0	12/08/2021	6228210243	CIVIL	WMN	WMN	GT	GT	CP	ISSUED FOR PERMIT
REV	DATE	JOB NO.	PROJECT TYPE	DES	DFTR	CHKD	ENGR	APPD	DESCRIPTION

wood.

Environment & Infrastructure Solutions
5710 OLEANDER DRIVE, SUITE 110
WILMINGTON, NC 28403
TEL: (910) 452-1165
FAX: (844) 648-9591
LICENSURE:
NC ENG: F-1263
NC GEOLOGY: C-247

PENDER COUNTY

120821

**FORMER BASF PLANT SITE:
DEMOLITION EROSION
AND SEDIMENT CONTROL PLAN**

DEMOLITION PLAN

ISSUED FOR PERMIT

SCALE: AS SHOWN	DES: WMN
DWG TYPE: DWG	DFTR: WMN
JOB NO: 6228210243	CHKD: GT
DATE: 12/08/2021	ENGR: GT
FILENAME: DEMO PLAN.dwg	APPD: CP

DWG SIZE ANSI D 22"x34"	DRAWING NO. SHEET 004	REVISION 0
-------------------------------	---------------------------------	----------------------

DEFINITION - VEGETATIVE STABILIZATION
CONTROLLING RUNOFF AND EROSION ON DISTURBED AREAS BY ESTABLISHING PERENNIAL VEGETATIVE COVER WITH SEED.

PURPOSE
TO STABILIZE DISTURBED AREAS IN A MANNER THAT IS ECONOMICAL, ADAPTS TO SITE CONDITIONS, AND ALLOWS SELECTION OF THE MOST APPROPRIATE PLANT MATERIALS.

SPECIFICATIONS

SEEDBED REQUIREMENTS

ESTABLISHMENT OF VEGETATION SHOULD NOT BE ATTEMPTED ON SITES THAT ARE UNSUITABLE DUE TO EXCESSIVE SOIL COMPACTION, INAPPROPRIATE SOIL TEXTURE, POOR DRAINAGE, CONCENTRATED OVERLAND FLOW, OR STEEPNESS OF SLOPE UNTIL MEASURES HAVE BEEN TAKEN TO CORRECT THESE PROBLEMS.

TO MAINTAIN A GOOD STAND OF VEGETATION, THE SOIL MUST MEET CERTAIN MINIMUM REQUIREMENTS AS A GROWTH MEDIUM. THE EXISTING SOIL SHOULD HAVE THESE CRITERIA:

- ENOUGH FINE-GRAINED (SILT AND CLAY) MATERIAL TO MAINTAIN ADEQUATE MOISTURE AND NUTRIENT SUPPLY (AVAILABLE WATER CAPACITY OF AT LEAST .05 INCHES WATER TO 1 INCH OF SOIL).
- SUFFICIENT PORE SPACE TO PERMIT ROOT PENETRATION.
- SUFFICIENT DEPTH OF SOIL TO PROVIDE AN ADEQUATE ROOT ZONE. THE DEPTH TO ROCK OR IMPERMEABLE LAYERS SUCH AS HARDPANS SHOULD BE 12 INCHES OR MORE, EXCEPT ON SLOPES STEEPER THAN 2:1 WHERE THE ADDITION OF SOIL IS NOT FEASIBLE.
- A FAVORABLE PH RANGE FOR PLANT GROWTH, USUALLY 6.0 - 6.5.
- FREE FROM LARGE ROOTS, BRANCHES, LARGE CLODS OF EARTH, OR TRASH OF ANY KIND. CLODS AND STONES MAY BE LEFT ON SLOPES STEEPER THAN 3:1 IF THEY ARE TO BE HYDRO SEEDED.

IF ANY OF THE ABOVE CRITERIA ARE NOT MET - I.E., IF EXISTING SOIL IS TOO COARSE, DENSE, SHALLOW OR ACIDIC TO FOSTER VEGETATION, SPECIAL AMENDMENTS ARE REQUIRED. THE SOIL CONDITIONERS DESCRIBED BELOW MAY BE BENEFICIAL OR, PREFERABLY, TOPSOIL MAY BE APPLIED.

SEEDBED PREPARATION
INSTALL NECESSARY MECHANICAL EROSION AND SEDIMENTATION CONTROL PRACTICES BEFORE SEEDING, AND COMPLETE GRADING ACCORDING TO THE APPROVED PLAN.

LIME AND FERTILIZER NEEDS SHOULD BE DETERMINED BY SOIL TESTS, DIRECTIONS, SAMPLE CARTONS, AND INFORMATION SHEETS ARE AVAILABLE THROUGH COUNTY AGRICULTURAL EXTENSION OFFICES. TESTING IS ALSO DONE BY COMMERCIAL LABORATORIES.

WHEN SOIL TEST RESULTS ARE NOT AVAILABLE FOR TEMPORARY SEEDBED PREPARATION FOLLOW RATES SUGGESTED IN THE SEEDING SPECIFICATIONS SHOWN AT RIGHT. APPLICATION RATES USUALLY FALL INTO THE FOLLOWING RANGES:

- GROUND AGRICULTURAL LIMESTONE: LIGHT-TEXTURED, SANDY SOILS: 1 TO 1-1/2 TONS/ACRE, HEAVY-TEXTURED, CLAYEY SOILS: 2-3 TONS/ACRE
- FERTILIZER: 700-1000 LB/ACRE OF 10-10-10 (OR THE EQUIVALENT)

APPLY LIME AND FERTILIZER EVENLY AND INCORPORATE INTO THE TOP 4-6 INCHES OF SOIL BY DISKING OR OTHER SUITABLE MEANS. OPERATE MACHINERY ON THE CONTOUR. WHEN USING A HYDRO SEEDER, APPLY LIME AND FERTILIZER TO A ROUGH, LOOSE SURFACE.

ROUGHEN SURFACES PRIOR TO SEEDING.

COMPLETE SEEDBED PREPARATION BY BREAKING UP LARGE CLODS AND RAKING INTO A SMOOTH, UNIFORM SURFACE (SLOPES LESS THAN 3:1). FILL IN OR LEVEL DEPRESSIONS THAT CAN COLLECT WATER. BROADCAST SEED INTO A FRESHLY LOOSENEED SEEDBED THAT HAS NOT BEEN SEALED BY RAINFALL.

SEEDING
SEEDING DATES GIVEN IN THE SEEDING MIXTURE SPECIFICATIONS ARE DESIGNATED AS "BEST" OR "POSSIBLE". SEEDINGS PROPERLY CARRIED OUT WITHIN THE "BEST" DATES HAVE A HIGH PROBABILITY OF SUCCESS. IT IS ALSO POSSIBLE TO HAVE SATISFACTORY ESTABLISHMENT WHEN SEEDING OUTSIDE THESE DATES. HOWEVER, AS YOU DEViate FROM THEM, THE PROBABILITY OF FAILURE INCREASES RAPIDLY. SEEDING ON THE LAST DATE SHOWN UNDER "POSSIBLE" MAY REDUCE CHANGES OF SUCCESS BY 30-50%. ALWAYS TAKE THIS INTO ACCOUNT IN SCHEDULING LAND-DISTURBING ACTIVITIES.

LABELING OF NON-CERTIFIED SEED IS ALSO REQUIRED BY LAW. LABELS CONTAIN IMPORTANT INFORMATION ON SEED PURITY, GERMINATION, AND PRESENCE OF WOOD SEEDS. SEEDS MUST MEET STATE STANDARDS FOR CONTENT OF NOXIOUS WEEDS. DO NOT ACCEPT SEED CONTAINING "PROHIBITED" NOXIOUS WEED SEED.

INOCULATE LEGUME SEED WITH THE RHIZOBIUM BACTERIA APPROPRIATE TO THE SPECIES OF LEGUME.

APPLY SEED UNIFORMLY WITH A CYCLONE SEEDER, DROP-TYPE SPREADER, DRILL, CULTIPACKER SEEDER, OR HYDRO SEEDER ON A FIRM, FRIABLE SEEDBED.

WHEN USING A DRILL OR CULTIPACKER SEEDER, PLANT SMALL GRAINS NO MORE THAN 1 INCH DEEP, GRASSES AND LEGUMES NO MORE THAN 1/2 INCH. EQUIPMENT SHOULD BE CALIBRATED IN THE FIELD FOR THE DESIRED SEEDING RATE.

WHEN USING BROADCAST-SEEDING METHODS, SUBDIVIDE THE AREA INTO WORKABLE SECTIONS AND DETERMINE THE AMOUNT OF SEED NEEDED FOR EACH SECTION. APPLY ONE-HALF THE SEED WHILE MOVING BACK AND FORTH ACROSS THE AREA, MAKING A UNIFORM PATTERN; THEN APPLY THE SECOND HALF IN THE SAME WAY, BUT MOVING AT RIGHT ANGLES TO THE FIRST PASS.

MULCH ALL PLANTINGS IMMEDIATELY AFTER SEEDING.

HYDRO SEEDING
SURFACE ROUGHENING IS PARTICULARLY IMPORTANT WHEN HYDRO SEEDING. AS A ROUGHENED SLOPE WILL PROVIDE SOME NATURAL COVERAGE FOR LIME, FERTILIZER, AND SEED. THE SURFACE SHOULD NOT BE COMPACTED OR SMOOTH. FINE SEEDBED PREPARATION IS NOT NECESSARY FOR HYDRO SEEDING OPERATIONS. LARGE CLODS, STONES, AND IRREGULARITIES PROVIDE CAVITIES IN WHICH SEEDS CAN LODGE.

RATE OF WOOD FIBER (CELLULOSE) APPLICATION SHALL BE 1,000 - 2,000 LB/ACRE.

APPLY LEGUME INOCULANTS AT FOUR TIMES THE RECOMMENDED RATE WHEN ADDING INOCULANT TO A HYDRO SEEDER SLURRY.

IF A MACHINERY BREAKDOWN OF 1/2 TO 2 HOURS OCCURS, ADD 50% MORE SEED TO THE TANK, BASED ON THE PROPORTION OF THE SLURRY REMAINING. THIS SHOULD COMPENSATE FOR DAMAGE TO SEED. BEYOND 2 HOURS, A FULL RATE OF NEW SEED MAY BE NECESSARY.

LIME IS NOT NORMALLY APPLIED WITH A HYDRAULIC SEEDER BECAUSE IT IS ABRASIVE. IT CAN BE BLOWN ONTO STEEP SLOPES IN DRY FORM.

MAINTENANCE
GENERALLY, A STAND OF VEGETATION CANNOT BE DETERMINED TO BE FULLY ESTABLISHED UNTIL IT HAS BEEN MAINTAINED FOR ONE FULL YEAR FROM PLANTING. INSPECT SEEDED AREAS FOR FAILURE AND MAKE NECESSARY REPAIRS AND RESEEDINGS WITHIN THE SAME SEASON, IF POSSIBLE.

RESEEDING-IF A STAND HAS INADEQUATE COVER, RE-EVALUATE CHOICE OF PLANT MATERIALS AND QUANTITIES OF LIME AND FERTILIZER. RE-ESTABLISH THE STAND AFTER SEEDBED PREPARATION OR OVER- SEED THE STAND. CONSIDER SEEDING TEMPORARY ANNUAL SPECIES IF THE TIME OF YEAR IS NOT APPROPRIATE FOR PERMANENT SEEDING.

IF VEGETATION FAILS TO GROW, SOIL MUST BE TESTED TO DETERMINE IF ACIDITY OR NUTRIENT IMBALANCE IS RESPONSIBLE.

FERTILIZATION-ON THE TYPICAL DISTURBED SITE, FULL ESTABLISHMENT USUALLY REQUIRES RE-FERTILIZATION IN THE SECOND GROWING SEASON. FINE TUNE REQUIRES ANNUAL MAINTENANCE FERTILIZATION. USE SOIL TESTS IF POSSIBLE OR FOLLOW THE GUIDELINES GIVEN FOR THE SPECIFIC SEEDING MIXTURE.

TEMPORARY SEEDING SPECIFICATIONS

SEEDING MIXTURE (FALL)	
SPECIES*	RATE (LB/ACRE)
RYE GRAIN (SECALE CEREALE)	120

SEEDING MIXTURE (LATE WINTER EARLY SPRING)	
SPECIES*	RATE (LB/ACRE)
RYE GRAIN (SECALE CEREALE)	120

SEEDING MIXTURE (SUMMER)	
SPECIES*	RATE (LB/ACRE)
GERMAN MILLET (SETARIA ITALICA)	40

SEEDING DATES (PIEDMONT)	
FALL:	AUG. 15 - DEC. 30
LATE WINTER (EARLY SPRING):	JAN. 1 - MAY 1 LATE
SUMMER:	MAY 1 - AUG. 15

SOIL AMENDMENTS
FOLLOW RECOMMENDATIONS OF SOIL TESTS OR APPLY 2,000 LB/ACRE GROUND AGRICULTURAL LIMESTONE AND 1,000 LB/ACRE 10-10-10 FERTILIZER.

MULCH
APPLY 4,000 LB/ACRE STRAW, ANCHOR MULCH BY TACKING WITH ASPHALT, ROVING OR A MULCH ANCHORING TOOL. A DISK WITH BLADES SET NEARLY STRAIGHT CAN BE USED AS A MULCH ANCHORING. TOOL.

MAINTENANCE
RE-FERTILIZE IF GROWTH IS NOT FULLY ADEQUATE. RESEED, RE-FERTILIZE AND MULCH IMMEDIATELY FOLLOWING EROSION OR OTHER DAMAGE.

PURSUANT TO G.S. 113A-57(2), THE ANGLE FOR GRADED SLOPES AND FILLS SHALL BE NO GREATER THAN THE ANGLE THAT CAN BE RETAINED BY VEGETATIVE COVER OR OTHER ADEQUATE EROSION-CONTROL DEVICES OR STRUCTURES. IN ANY EVENT, 3H:1V OR GREATER SLOPES LEFT EXPOSED WILL, WITHIN 7 CALENDAR DAYS OF COMPLETION OF ANY PHASE OF GRADING, BE PLANTED OR OTHERWISE PROVIDED WITH TEMPORARY OR PERMANENT GROUND COVER, DEVICES, OR STRUCTURES SUFFICIENT TO RESTRAIN EROSION.

PURSUANT TO G.S. 113A-57(3), PROVISIONS FOR PERMANENT GROUND COVER SUFFICIENT TO RESTRAIN EROSION MUST BE ACCOMPLISHED FOR ALL DISTURBED AREAS WITHIN 14 WORKING DAYS FOLLOWING COMPLETION OF CONSTRUCTION OR DEVELOPMENT.

*REF: 6.10 A,B AND C, NC EROSION AND SEDIMENT CONTROL PLANNING AND DESIGN MANUAL, 2013.

PERMANENT SEEDING SPECIFICATIONS

SEEDING MIXTURE	
SPECIES*	RATE (LB/ACRE)

TALL FESCUE (FESTUCA ARUNDINACEA) (GRASS LINED CHANNELS)	200
TALL FESCUE (FESTUCA ARUNDINACEA) (OTHER AREAS)	100

LESPEDeza SHALL NOT BE USED.

NURSE PLANTS

BETWEEN MAY 1 AND AUG. 15, ADD 10 LB/ACRE GERMAN MILLET (SETARIA ITALICA) OR 15 LB/ACRE SUDAN GRASS. PRIOR TO MAY 1 OR AFTER AUG. 15, ADD 40 LB/ACRE RYE GRAIN (SECALE CEREALE).

<u>SEEDING DATES</u>		
	<u>BEST</u>	<u>POSSIBLE</u>
FALL:	AUG. 25 - SEPT. 15	AUG. 20 - OCT. 25
LATE WINTER:	FEB. 15 - MAR. 21	FEB. 1 - APR. 15

SOIL AMENDMENTS

A NORTH CAROLINA DEPARTMENT OF AGRICULTURE SOILS TEST (OR EQUAL) SHALL BE OBTAINED FOR ALL AREAS TO BE SEEDED, SPRIGGED, SODDED OR PLANTED. RECOMMENDED FERTILIZER AND PH ADJUSTING PRODUCTS SHALL BE INCORPORATED INTO THE PREPARED AREAS AND BACKFILL MATERIAL PER TESTS TAKEN PRIOR TO, DURING AND AFTER CONSTRUCTION.

MULCH

APPLY 4,000-5,000 LB/ACRE GRAIN STRAW OR EQUIVALENT COVER OF ANOTHER SUITABLE MULCHING MATERIAL. ANCHOR MULCH BY TACKING WITH ASPHALT, ROVING, OR NETTING. NETTING IS THE PREFERRED ANCHORING METHOD ON STEEP SLOPES.

MAINTENANCE






RE-FERTILIZE IN THE SECOND YEAR UNLESS GROWTH IS FULLY ADEQUATE. MAY BE MOWED ONCE OR TWICE A YEAR, BUT MOWING IS NOT NECESSARY. RESEED, FERTILIZE, AND MULCH DAMAGED AREAS IMMEDIATELY.

PURSUANT TO G.S. 113A-57(3), PROVISIONS FOR PERMANENT GROUND COVER SUFFICIENT TO RESTRAIN EROSION MUST BE ACCOMPLISHED FOR ALL DISTURBED AREAS WITHIN 14 WORKING DAYS.

*REF: 6.11 NC EROSION AND SEDIMENT CONTROL PLANNING AND DESIGN MANUAL, 2013.

NPDES Stormwater Discharge Permit for Construction Activities (NCGO1)


NCDEMR/Division of Energy, Mineral and Land Resources

STABILIZATION TIMEFRAMES (Effective Aug. 3, 2011)		
SITE AREA DESCRIPTION	STABILIZATION	TIMEFRAME EXCEPTIONS
 Perimeter dikes, swales, ditches, slopes	7 days	None
 High Quality Water (HQW) Zones	7 days	None
 Slopes steeper than 3:1	7 days	If slopes are 10' or less in length and are not steeper than 2:1, 14 days are allowed.
 Slopes 3:1 or flatter	14 days	7 days for slopes greater than 50' in length.
 All other areas with slopes flatter than 4:1	14 days	None, except for perimeters and HQW Zones.

SOIL STABILIZATION NOTES:

SOIL STABILIZATION SHALL BE ACHIEVED ON ANY AREA OF A SITE WHERE LAND-DISTURBING ACTIVITIES HAVE TEMPORARILY OR PERMANENTLY CEASED ACCORDING TO THE FOLLOWING SCHEDULE:

1. ALL PERIMETER DIKES, SWALES, DITCHES, PERIMETER SLOPES AND ALL SLOPES STEEPER THAN 3 HORIZONTAL TO 1 VERTICAL (3:1) SHALL BE PROVIDED TEMPORARY OR PERMANENT STABILIZATION WITH GROUND COVER AS SOON AS PRACTICABLE BUT IN ANY EVENT WITHIN 7 CALENDAR DAYS FROM THE LAST LAND-DISTURBING ACTIVITY.
2. ALL OTHER DISTURBED AREAS SHALL BE PROVIDED TEMPORARY OR PERMANENT STABILIZATION WITH GROUND COVER AS SOON AS PRACTICABLE BUT IN ANY EVENT WITHIN 14 CALENDAR DAYS FROM THE LAST LAND-DISTURBING ACTIVITY.

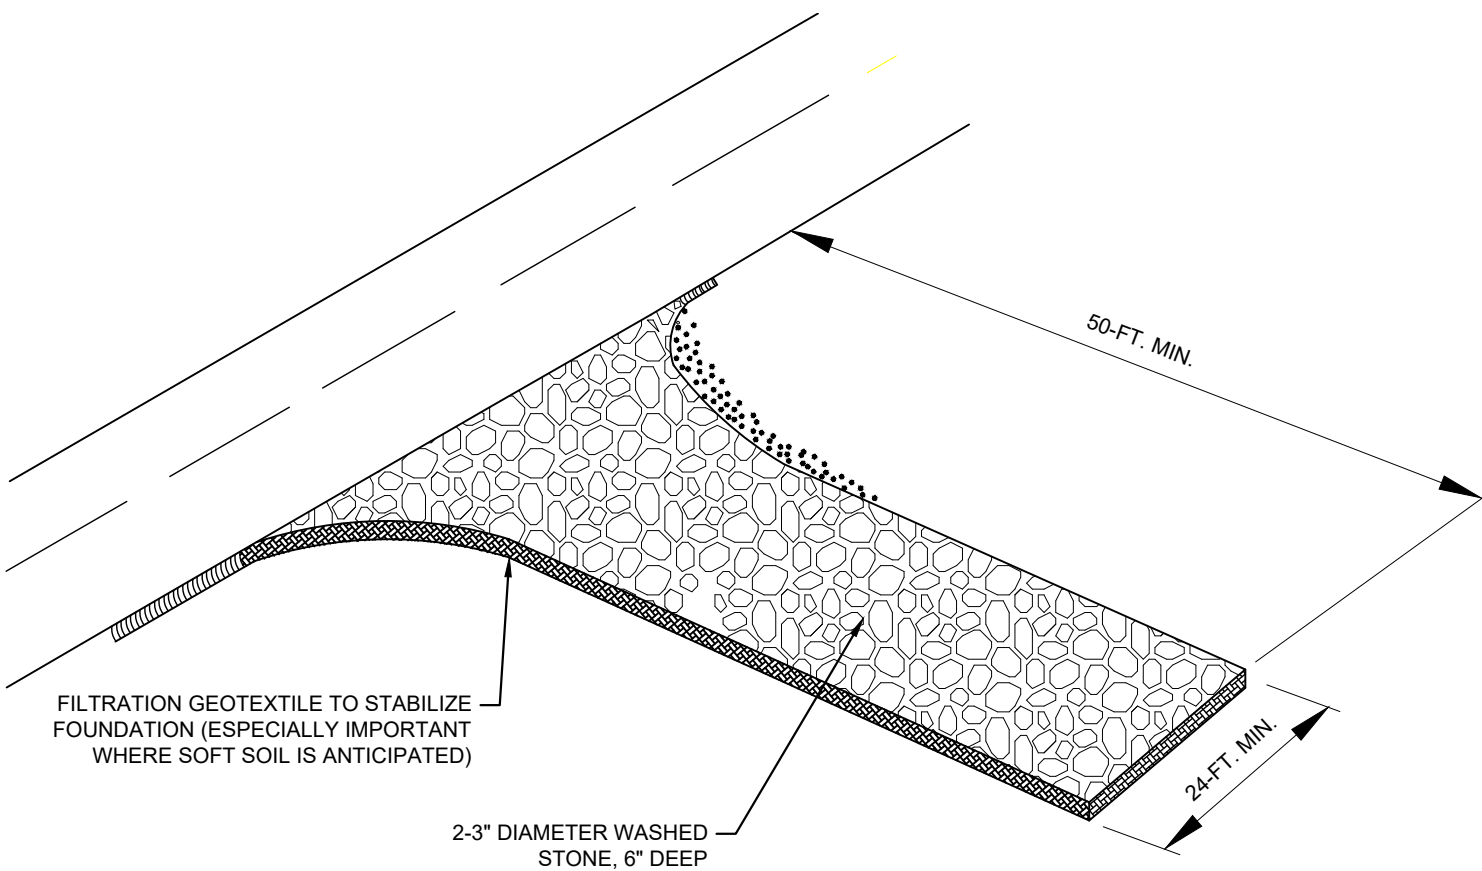


PERSPECTIVE VIEW

INSTALLATION NOTES:

1. AGGREGATE SIZE: 2-3" DIAMETER WASHED STONE
2. PAD THICKNESS: 6" MINIMUM
3. PAD WIDTH: 24" MINIMUM
4. PAD LENGTH: 50' MINIMUM
5. PAD LOCATION: LOCATE CONSTRUCTION ENTRANCES AND EXITS TO LIMIT SEDIMENT FROM LEAVING THE SITE AND TO PROVIDE A MAXIMUM UTILITY BY ALL CONSTRUCTION VEHICLES. AVOID STEEP GRADES AND ENTRANCES AT CURVES IN PUBLIC ROADS.

MAINTENANCE NOTES:

1. MONITOR DAILY TO SUPPLEMENT STONE TO ENSURE ENTRANCE FUNCTIONS PROPERLY.
2. CLEAN ANY MATERIAL TRACKED ONTO PUBLIC ROADWAY IMMEDIATELY.
3. SCHEDULE ROUTINE SWEEPING AT THE END OF EACH WORK DAY.
4. WASHING: IF CONDITIONS AT THE SITE ARE SUCH THAT MOST OF THE MUD AND SEDIMENT ARE NOT REMOVED BY VEHICLES TRAVELING OVER THE GRAVEL, THE TIRES SHOULD BE WASHED. WASHING SHOULD BE DONE ON AN AREA STABILIZED WITH CRUSHED STONE THAT DRAINS INTO A SEDIMENT TRAP OR OTHER SUITABLE DISPOSAL AREA. A WASH RACK MAY BE USED TO MAKE WASHING STONE MORE CONVENIENT AND EFFECTIVE.

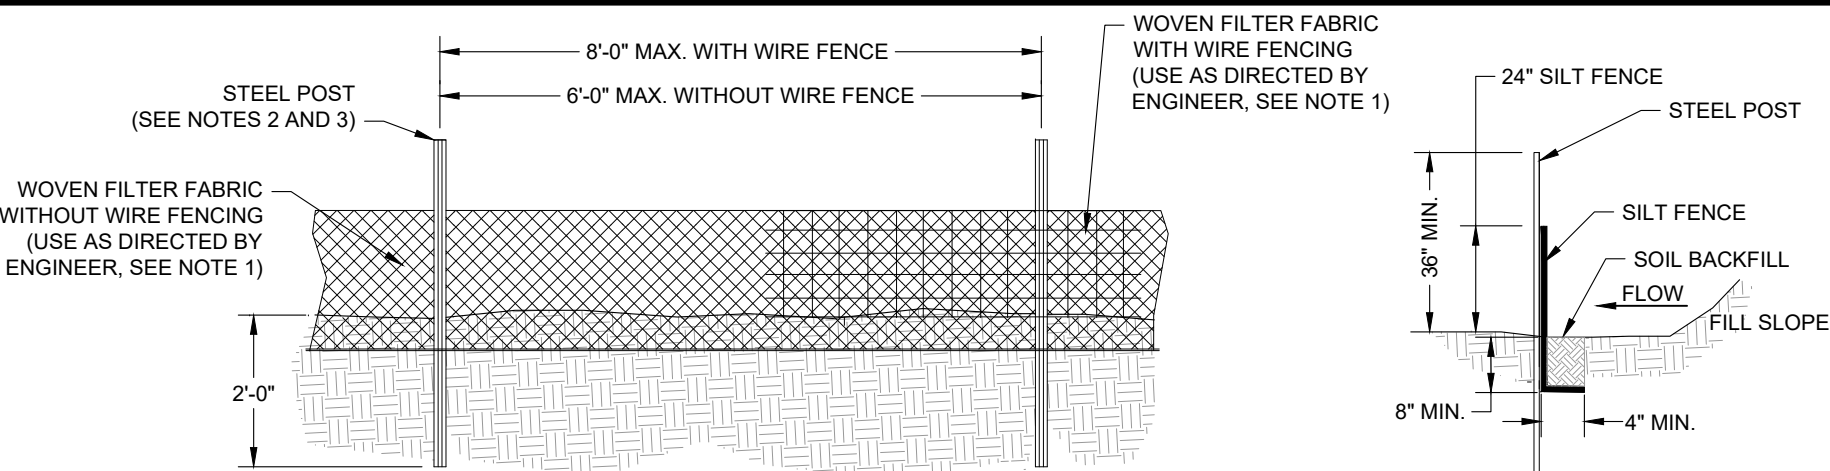

WOVEN FILTER FABRIC WITH WIRE FENCING GENERAL NOTES:

1. WOVEN FILTER FABRIC SHALL COMPLY WITH THE REQUIREMENTS OF TABLE 6.62B BELOW.
2. WIRE FENCING SHALL BE A MINIMUM OF 36" IN WIDTH, AT LEAST #10 GAGE, AND SHALL HAVE A MINIMUM OF 6 LINE WIRES WITH 12" MAXIMUM STAY SPACING.
3. STEEL POSTS SHALL BE 5'-0" IN LENGTH AND BE OF THE SELF-FASTENER ANGLE STEEL TYPE.
4. INSTALL SAFETY CAPS ON SILT FENCE STEEL POSTS.
5. TURN SILT FENCE UP SLOPE AT TERMINATION POINTS TO CONTAIN FLOW OF RUNOFF.
6. DO NOT INSTALL SEDIMENT FENCE ACROSS STREAMS, DITCHES, WATERWAYS OR OTHER AREAS OF CONCENTRATED FLOW.

WOVEN FILTER FABRIC WITHOUT WIRE FENCING GENERAL NOTES:

1. WOVEN FILTER FABRIC SHALL COMPLY WITH THE REQUIREMENTS OF TABLE 6.62B BELOW.
2. STEEL POSTS SHALL BE 5'-0" IN LENGTH AND BE OF THE SELF-FASTENER ANGLE STEEL TYPE.
3. INSTALL SAFETY CAPS ON SILT FENCE STEEL POSTS.
4. TURN SILT FENCE UP SLOPE AT TERMINATION POINTS TO CONTAIN FLOW OF RUNOFF.
5. DO NOT INSTALL SEDIMENT FENCE ACROSS STREAMS, DITCHES, WATERWAYS OR OTHER AREAS OF CONCENTRATED FLOW.


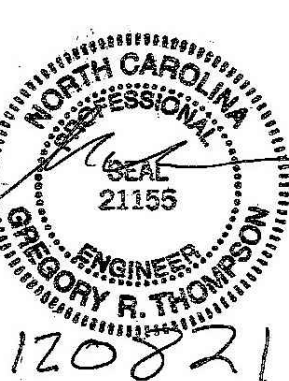
MAINTENANCE NOTES:

1. SILT FENCE SHALL BE MAINTAINED FOR THE DURATION OF THE PROJECT. SILT FENCE SHALL BE REPLACED IF RIPPED, DETERIORATED, OR BECOMES OTHERWISE INEFFECTIVE, FULLY FUNCTIONAL, OR DOES NOT MEET DESIGN INTENT.
2. SEDIMENT DEPOSITS SHOULD BE REMOVED WHEN DEPOSITS REACH ONE-THIRD THE HEIGHT OF THE BARRIER. ANY SEDIMENT DEPOSITS REMAINING IN PLACE AFTER THE SILT FENCE IS REMOVED SHALL BE DRESSED TO CONFORM TO THE EXISTING GRADE, PREPARED AND SEEDED.

Table 6.62b Specifications For Sediment Fence Fabric

Temporary Silt Fence Material Property Requirements					
	Test Material	Units	Supported ¹ Silt Fence	Un-Supported ¹ Silt Fence	Type of Value
Grab Strength	ASTM D 4632	N (lbs)			
Machine Direction			400	550	MARV
			(90)	(90)	
X-Machine Direction			400	450	MARV
			(90)	(90)	
Permittivity ²	ASTM D 4491	sec-1	0.05	0.05	MARV
Apparent Opening Size ²	ASTM D 4751	mm	0.60	0.60	Max. ARV ³
		(US Sieve #)	(30)	(30)	
Ultraviolet Stability	ASTM D 4355	% Retained Strength	70% after 500h of exposure	70% after 500h of exposure	Typical

¹ Silt Fence support shall consist of 14 gage steel wire with a mesh spacing of 150 mm (6 inches), or prefabricated poylmer mesh of equivalent strength.
² These default values are based on empirical evidence with a variety of sediment. For environmentally sensitive areas, a review of previous experience and/or site or regionally specific geotextile tests in accordance with Test Method D 5141 should be performed by the agency to confirm suitability of these requirements.
³ As measured in accordance with Test Method D 4632.

 Environment & Infrastructure Solutions 5710 CLEANDER DRIVE, SUITE 110 WILMINGTON, NC 28403 TEL: (910) 452-1185 FAX: (844) 648-9591 LICENSURE: NC ENG: F-1263 NC GEOLOGY: C-247	TITLE FORMER BASF PLANT SITE: DEMOLITION EROSION AND SEDIMENT CONTROL PLAN		
	E&SC DETAILS		
	FOR ISSUED FOR PERMIT		
		PENDER COUNTY	SCALE: AS SHOWN DWG TYPE: DWG JOB NO: 6228210243 DATE: 12/08/2021
		DES: WMN DFTR: WMN CHKD: GT ENGR: GT	
FILENAME: SHEET 005 E&SC DETAILS.dwg		APPD: CP	
DWG SIZE ANSI D 22"x34"	DRAWING NO. SHEET 005		
REVISION 0			

0	12/08/2021	6228210243	CIVIL	WMN	WMN	GT	GT	CP	ISSUED FOR PERMIT
REV	DATE	JOB NO.	PROJECT TYPE	DES	DFTR	CHKD	ENGR	APPD	DESCRIPTION

SECTION A: SELF-INSPECTION

Self-inspections are required during normal business hours in accordance with the table below. When adverse weather or site conditions would cause the safety of the inspection personnel to be in jeopardy, the inspection may be delayed until the next business day on which it is safe to perform the inspection. In addition, when a storm event of equal to or greater than 1.0 inch occurs outside of normal business hours, the self-inspection shall be performed upon the commencement of the next business day. Any time when inspections were delayed shall be noted in the Inspection Record.

Inspect	Frequency (during normal business hours)	Inspection records must include:
(1) Rain gauge maintained in good working order	Daily	Daily rainfall amounts. If no daily rain gauge observations are made during weekend or holiday periods, and no individual-day rainfall information is available, record the cumulative rain measurement for those un-attended days (and this will determine if a site inspection is needed). Days on which no rainfall occurred shall be recorded as "zero." The permittee may use another rain-monitoring device approved by the Division.
(2) E&SC Measures	At least once per 7 calendar days and within 24 hours of a rain event ≥ 1.0 inch in 24 hours	1. Identification of the measures inspected, 2. Date and time of the inspection, 3. Name of the person performing the inspection, 4. Indication of whether the measures were operating properly, 5. Description of maintenance needs for the measure, 6. Description, evidence, and date of corrective actions taken.
(3) Stormwater discharge outfalls (SDOs)	At least once per 7 calendar days and within 24 hours of a rain event ≥ 1.0 inch in 24 hours	1. Identification of the discharge outfalls inspected, 2. Date and time of the inspection, 3. Name of the person performing the inspection, 4. Evidence of indicators of stormwater pollution such as oil sheen, floating or suspended solids or discoloration, 5. Indication of visible sediment leaving the site, 6. Description, evidence, and date of corrective actions taken.
(4) Perimeter of site	At least once per 7 calendar days and within 24 hours of a rain event ≥ 1.0 inch in 24 hours	If visible sedimentation is found outside site limits, then a record of the following shall be made: 1. Actions taken to clean up or stabilize the sediment that has left the site limits, 2. Description, evidence, and date of corrective actions taken, and 3. An explanation as to the actions taken to control future releases.
(5) Streams or wetlands onsite or offsite (where accessible)	At least once per 7 calendar days and within 24 hours of a rain event ≥ 1.0 inch in 24 hours	If the stream or wetland has increased visible sedimentation or a stream has visible increased turbidity from the construction activity, then a record of the following shall be made: 1. Description, evidence and date of corrective actions taken, and 2. Records of the required reports to the appropriate Division Regional Office per Part III, Section C, Item (2)(a) of this permit of this permit.
(6) Ground stabilization measures	After each phase of grading	1. The phase of grading (installation of perimeter E&SC measures, clearing and grubbing, installation of storm drainage facilities, completion of all land-disturbing activity, construction or redevelopment, permanent ground cover). 2. Documentation that the required ground stabilization measures have been provided within the required timeframe or an assurance that they will be provided as soon as possible.

NOTE: The rain inspection resets the required 7 calendar day inspection requirement.

EQUIPMENT AND VEHICLE MAINTENANCE

- Maintain vehicles and equipment to prevent discharge of fluids.
- Provide drip pans under any stored equipment.
- Identify leaks and repair as soon as feasible, or remove leaking equipment from the project.
- Collect all spent fluids, store in separate containers and properly dispose as hazardous waste (recycle when possible).
- Remove leaking vehicles and construction equipment from service until the problem has been corrected.
- Bring used fuels, lubricants, coolants, hydraulic fluids and other petroleum products to a recycling or disposal center that handles these materials.

LITTER, BUILDING MATERIAL AND LAND CLEARING WASTE

- Never bury or burn waste. Place litter and debris in approved waste containers.
- Provide a sufficient number and size of waste containers (e.g dumpster, trash receptacle) on site to contain construction and domestic wastes.
- Locate waste containers at least 50 feet away from storm drain inlets and surface waters unless no other alternatives are reasonably available.
- Locate waste containers on areas that do not receive substantial amounts of runoff from upland areas and does not drain directly to a storm drain, stream or wetland.
- Cover waste containers at the end of each workday and before storm events or provide secondary containment. Repair or replace damaged waste containers.
- Anchor all lightweight items in waste containers during times of high winds.
- Empty waste containers as needed to prevent overflow. Clean up immediately if containers overflow.
- Dispose waste off-site at an approved disposal facility.
- On business days, clean up and dispose of waste in designated waste containers.

PAINT AND OTHER LIQUID WASTE

- Do not dump paint and other liquid waste into storm drains, streams or wetlands.
- Locate paint washouts at least 50 feet away from storm drain inlets and surface waters unless no other alternatives are reasonably available.
- Contain liquid wastes in a controlled area.
- Containment must be labeled, sized and placed appropriately for the needs of site.
- Prevent the discharge of soaps, solvents, detergents and other liquid wastes from construction sites.

SECTION B: RECORDKEEPING

1. E&SC Plan Documentation

The approved E&SC plan as well as any approved deviation shall be kept on the site. The approved E&SC plan must be kept up-to-date throughout the coverage under this permit. The following items pertaining to the E&SC plan shall be documented in the manner described:

Item to Document	Documentation Requirements
(a) Each E&SC Measure has been installed and does not significantly deviate from the locations, dimensions and relative elevations shown on the approved E&SC Plan.	Initial and date each E&SC Measure on a copy of the approved E&SC Plan or complete, date and sign an inspection report that lists each E&SC Measure shown on the approved E&SC Plan. This documentation is required upon the initial installation of the E&SC Measures or if the E&SC Measures are modified after initial installation.
(b) A phase of grading has been completed.	Initial and date a copy of the approved E&SC Plan or complete, date and sign an inspection report to indicate completion of the construction phase.
(c) Ground cover is located and installed in accordance with the approved E&SC Plan.	Initial and date a copy of the approved E&SC Plan or complete, date and sign an inspection report to indicate compliance with approved ground cover specifications.
(d) The maintenance and repair requirements for all E&SC Measures have been performed.	Complete, date and sign an inspection report.
(e) Corrective actions have been taken to E&SC Measures.	Initial and date a copy of the approved E&SC Plan or complete, date and sign an inspection report to indicate the completion of the corrective action.


2. Additional Documentation

In addition to the E&SC Plan documents above, the following items shall be kept on the site and available for agency inspectors at all times during normal business hours, unless the Division provides a site-specific exemption based on unique site conditions that make this requirement not practical:

- This general permit as well as the certificate of coverage, after it is received.
- Records of inspections made during the previous 30 days. The permittee shall record the required observations on the Inspection Record Form provided by the Division or a similar inspection form that includes all the required elements. Use of electronically-available records in lieu of the required paper copies will be allowed if shown to provide equal access and utility as the hard-copy records.
- All data used to complete the Notice of Intent and older inspection records shall be maintained for a period of three years after project completion and made available upon request. [40 CFR 122.41]

CONCRETE WASHOUTS

- Do not discharge concrete or cement slurry from the site.
- Dispose of, or recycle settled, hardened concrete residue in accordance with local and state solid waste regulations and at an approved facility.
- Manage washout from mortar mixers in accordance with the above item and in addition place the mixer and associated materials on impervious barrier and within lot perimeter silt fence.
- Install temporary concrete washouts per local requirements, where applicable. If an alternate method or product is to be used, contact your approval authority for review and approval. If local standard details are not available, use one of the two types of temporary concrete washouts provided on this detail.
- Do not use concrete washouts for dewatering or storing defective curb or sidewalk sections. Stormwater accumulated within the washout may not be pumped into or discharged to the storm drain system or receiving surface waters. Liquid waste must be pumped out and removed from project.
- Locate washouts at least 50 feet from storm drain inlets and surface waters unless it can be shown that no other alternatives are reasonably available. At a minimum, install protection of storm drain inlet(s) closest to the washout which could receive spills or overflow.
- Locate washouts in an easily accessible area, on level ground and install a stone entrance pad in front of the washout. Additional controls may be required by the approving authority.
- Install at least one sign directing concrete trucks to the washout within the project limits. Post signage on the washout itself to identify this location.
- Remove leavings from the washout when at approximately 75% capacity to limit overflow events. Replace the tarp, sand bags or other temporary structural components when no longer functional. When utilizing alternative or proprietary products, follow manufacturer's instructions.
- At the completion of the concrete work, remove remaining leavings and dispose of in an approved disposal facility. Fill pit, if applicable, and stabilize any disturbance caused by removal of washout.

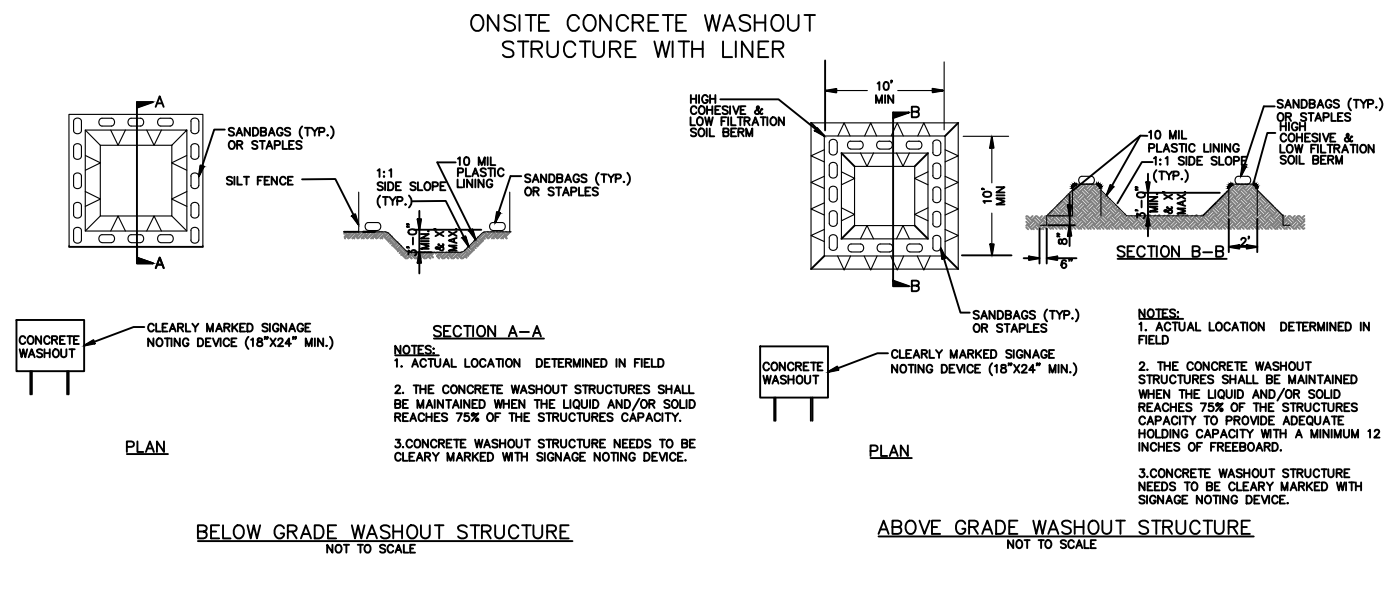

SECTION C: REPORTING

1. Occurrences that must be reported

Permittees shall report the following occurrences:

- Visible sediment deposition in a stream or wetland.
- Oil spills if:
 - They are 25 gallons or more,
 - They are less than 25 gallons but cannot be cleaned up within 24 hours,
 - They cause sheen on surface waters (regardless of volume), or
 - They are within 100 feet of surface waters (regardless of volume).
- Releases of hazardous substances in excess of reportable quantities under Section 311 of the Clean Water Act (Ref: 40 CFR 110.3 and 40 CFR 117.3) or Section 102 of CERCLA (Ref: 40 CFR 302.4) or G.S. 143-215.85.
- Anticipated bypasses and unanticipated bypasses.
- Noncompliance with the conditions of this permit that may endanger health or the environment.

2. Reporting Timeframes and Other Requirements

After a permittee becomes aware of an occurrence that must be reported, he shall contact the appropriate Division regional office within the timeframes and in accordance with the other requirements listed below. Occurrences outside normal business hours may also be reported to the Division's Emergency Response personnel at (800) 662-7956, (800) 858-0368 or (919) 733-3300.

Occurrence	Reporting Timeframes (After Discovery) and Other Requirements
(a) Visible sediment deposition in a stream or wetland	<ul style="list-style-type: none">Within 24 hours, an oral or electronic notification.Within 7 calendar days, a report that contains a description of the sediment and actions taken to address the cause of the deposition. Division staff may waive the requirement for a written report on a case-by-case basis.If the stream is named on the NC 303(d) list as impaired for sediment-related causes, the permittee may be required to perform additional monitoring, inspections or apply more stringent practices if staff determine that additional requirements are needed to assure compliance with the federal or state impaired-waters conditions.
(b) Oil spills and release of hazardous substances per Item 1(b)-(c) above	<ul style="list-style-type: none">Within 24 hours, an oral or electronic notification. The notification shall include information about the date, time, nature, volume and location of the spill or release.
(c) Anticipated bypasses [40 CFR 122.41(m)(3)]	<ul style="list-style-type: none">A report at least ten days before the date of the bypass, if possible. The report shall include an evaluation of the anticipated quality and effect of the bypass.
(d) Unanticipated bypasses [40 CFR 122.41(m)(3)]	<ul style="list-style-type: none">Within 24 hours, an oral or electronic notification.Within 7 calendar days, a report that includes an evaluation of the quality and effect of the bypass.
(e) Noncompliance with the conditions of this permit that may endanger health or the environment [40 CFR 122.41(l)(7)]	<ul style="list-style-type: none">Within 24 hours, an oral or electronic notification.Within 7 calendar days, a report that contains a description of the noncompliance, and its causes; the period of noncompliance, including exact dates and times, and if the noncompliance has not been corrected, the anticipated time noncompliance is expected to continue; and steps taken or planned to reduce, eliminate, and prevent recurrence of the noncompliance. [40 CFR 122.41(l)(6)].Division staff may waive the requirement for a written report on a case-by-case basis.

POLYACRYLAMIDES (PAMS) AND FLOCCULANTS

- Select flocculants that are appropriate for the soils being exposed during construction, selecting from the *NC DWR List of Approved PAMS/Flocculants*.
- Apply flocculants at or before the inlets to Erosion and Sediment Control Measures.
- Apply flocculants at the concentrations specified in the *NC DWR List of Approved PAMS/Flocculants* and in accordance with the manufacturer's instructions.
- Provide ponding area for containment of treated Stormwater before discharging offsite.
- Store flocculants in leak-proof containers that are kept under storm-resistant cover or surrounded by secondary containment structures.

PORTABLE TOILETS

- Install portable toilets on level ground, at least 50 feet away from storm drains, streams or wetlands unless there is no alternative reasonably available. If 50 foot offset is not attainable, provide relocation of portable toilet behind silt fence or place on a gravel pad and surround with sand bags.
- Provide staking or anchoring of portable toilets during periods of high winds or in high foot traffic areas.
- Monitor portable toilets for leaking and properly dispose of any leaked material. Utilize a licensed sanitary waste hauler to remove leaking portable toilets and replace with properly operating unit.

EARTHEN STOCKPILE MANAGEMENT

- Show stockpile locations on plans. Locate earthen-material stockpile areas at least 50 feet away from storm drain inlets, sediment basins, perimeter sediment controls and surface waters unless it can be shown no other alternatives are reasonably available.
- Protect stockpile with silt fence installed along toe of slope with a minimum offset of five feet from the toe of stockpile.
- Provide stable stone access point when feasible.
- Stabilize stockpile within the timeframes provided on this sheet and in accordance with the approved plan and any additional requirements. Soil stabilization is defined as vegetative, physical or chemical coverage techniques that will restrain accelerated erosion on disturbed soils for temporary or permanent control needs.

GROUND STABILIZATION AND MATERIALS HANDLING PRACTICES FOR COMPLIANCE WITH THE NCG01 CONSTRUCTION GENERAL PERMIT

Implementing the details and specifications on this plan sheet will result in the construction activity being considered compliant with the Ground Stabilization and Materials Handling sections of the NCG01 Construction General Permit (Sections E and F, respectively). The permittee shall comply with the Erosion and Sediment Control plan approved by the delegated authority having jurisdiction. All details and specifications shown on this sheet may not apply depending on site conditions and the delegated authority having jurisdiction.

SECTION E: GROUND STABILIZATION

Required Ground Stabilization Timeframes		
Site Area Description	Stabilize within this many calendar days after ceasing land disturbance	Timeframe variations
(a) Perimeter dikes, swales, ditches, and perimeter slopes	7	None
(b) High Quality Water (HQW) Zones	7	None
(c) Slopes steeper than 3:1	7	If slopes are 10' or less in length and are not steeper than 2:1, 14 days are allowed
(d) Slopes 3:1 to 4:1	14	-7 days for slopes greater than 50' in length and with slopes steeper than 4:1 -7 days for perimeter dikes, swales, ditches, perimeter slopes and HQW Zones -10 days for Falls Lake Watershed
(e) Areas with slopes flatter than 4:1	14	-7 days for perimeter dikes, swales, ditches, perimeter slopes and HQW Zones -10 days for Falls Lake Watershed unless there is zero slope

Note: After the permanent cessation of construction activities, any areas with temporary ground stabilization shall be converted to permanent ground stabilization as soon as practicable but in no case longer than 90 calendar days after the last land disturbing activity. Temporary ground stabilization shall be maintained in a manner to render the surface stable against accelerated erosion until permanent ground stabilization is achieved.

GROUND STABILIZATION SPECIFICATION

Stabilize the ground sufficiently so that rain will not dislodge the soil. Use one of the techniques in the table below:

Temporary Stabilization	Permanent Stabilization
<ul style="list-style-type: none">Temporary grass seed covered with straw or other mulches and tackifiersHydroseedingRolled erosion control products with or without temporary grass seedAppropriately applied straw or other mulchPlastic sheeting	<ul style="list-style-type: none">Permanent grass seed covered with straw or other mulches and tackifiersGeotextile fabrics such as permanent soil reinforcement mattingHydroseedingShrubs or other permanent plantings covered with mulchUniform and evenly distributed ground cover sufficient to restrain erosionStructural methods such as concrete, asphalt or retaining wallsRolled erosion control products with grass seed

HERBICIDES, PESTICIDES AND RODENTICIDES

- Store and apply herbicides, pesticides and rodenticides in accordance with label restrictions.
- Store herbicides, pesticides and rodenticides in their original containers with the label, which lists directions for use, ingredients and first aid steps in case of accidental poisoning.
- Do not store herbicides, pesticides and rodenticides in areas where flooding is possible or where they may spill or leak into wells, stormwater drains, ground water or surface water. If a spill occurs, clean area immediately.
- Do not stockpile these materials onsite.

HAZARDOUS AND TOXIC WASTE


- Create designated hazardous waste collection areas on-site.
- Place hazardous waste containers under cover or in secondary containment.
- Do not store hazardous chemicals, drums or bagged materials directly on the ground.

 Environment & Infrastructure Solutions 5710 OLEANDER DRIVE, SUITE 110 WILMINGTON, NC 28403 TEL: (910) 452-1155 FAX: (844) 648-9591 LICENSURE: NC ENG: F-1253 NC GEOLOGY: C-247	TITLE FORMER BASF PLANT SITE: DEMOLITION EROSION AND SEDIMENT CONTROL PLAN		
	FOR NCG01 NOTES ISSUED FOR PERMIT		
		SCALE: AS SHOWN	DES: WMN
		DWG TYPE: DWG	DFTR: WMN
	JOB NO: 6228210243		CHKD: GT
DATE: 12/08/2021		ENGR: GT	
FILENAME: SHEET 006 NCG01 NOTES.dwg		APPD: CP	
DWG SIZE ANSI D 22"x34"	DRAWING NO. SHEET 006		
REVISION 0			

0	12/08/2021	6228210243	CIVIL	WMN	WMN	GT	GT	CP	ISSUED FOR PERMIT
REV	DATE	JOB NO.	PROJECT TYPE	DES	DFTR	CHKD	ENGR	APPD	DESCRIPTION

Appendix D

Subsurface Utility Drawings

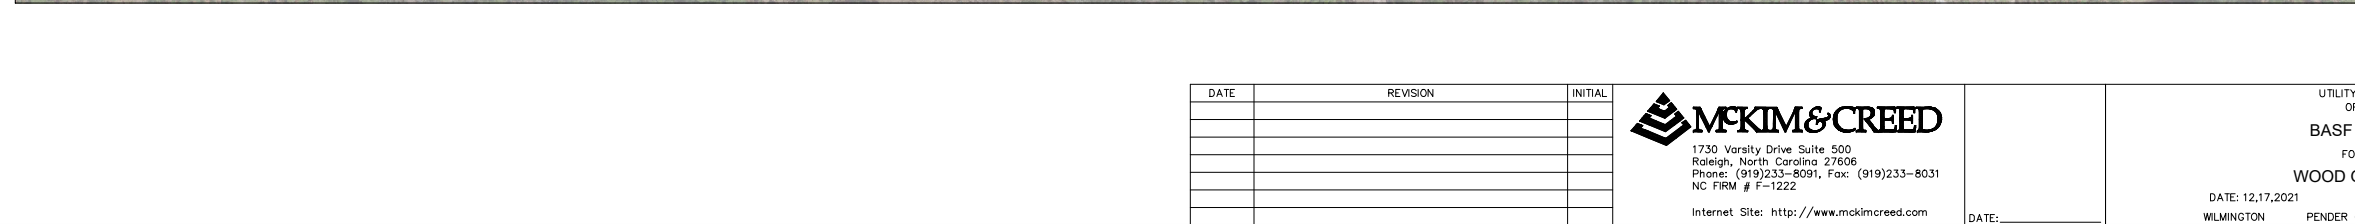

GROUND UTILITY LINES SHOWN REPRESENT QUALITY LEVEL B
HEAVING SERVICES. UTILITY MARKS PLACED ON THE GROUND
NOT TO BE USED FOR CONSTRUCTION PURPOSES. USE OF
TO RELIEVE ANY PARTY FROM THEIR OBLIGATION TO
AGE PREVENTION SYSTEM BEFORE DIGGING BEGINS. THIS
INVENTORY DOES NOT GUARANTEE THE EXISTENCE OF EACH
UNDERGROUND UTILITIES HAVE BEEN ACCOUNTED FOR.
VERTICAL POSITIONS CAN ONLY BE VERIFIED WHERE QUALITY
LEVEL B SERVICES HAVE BEEN PERFORMED. SERVICES WERE PROVIDED IN
ACCORDANCE WITH THE STANDARD PRACTICE FOR THE SUBSURFACE UTILITY
INVENTORY OF THE AMERICAN SOCIETY OF CIVIL ENGINEERS STANDARD
PRACTICE AND DEPICTION OF EXISTING SUBSURFACE UTILITY


<p>PROJECT # : 040820134</p> <p>PROJ. SVYR : ZNG</p> <p>DRAWN BY : FIELD BK.</p> <p>COMP. FILE : wu101-040820134</p> <p>SHEET # : OVERVIEW</p>	<p>SCALE: 1" = 50'</p> <p>NORTH CAROLINA</p> <p>Figure 3A</p>
--	---

 **MCKIM & CREED**
1730 Varsity Drive Suite 500
Raleigh, North Carolina 27606
Phone: (919)233-8091, Fax: (919)233-8031
NC FIRM # F-1222

Internet Site: <http://www.mckimcreed.com>

UTILITY MAP
OF
BASF SITE
FOR
WOOD GRO
DATE: 12,17,2021
WILMINGTON PENDER COUNT


PROJECT # : 040820134
PROJ. SVYR :
DRAWN BY : ZNG
FIELD BK. :
COMP. FILE : wu101-040820134
SHEET # : OVERVIEW



PRELIMINARY PLAT
NOT FOR RECORDATION, CONVEYANCE, OR SALES

UTILITY LEGEND	
CO	CLEAN OUT
DI	DROP INLET
SDMH	SANITARY SEWER MANHOLE
SDMH	STORM DRAIN MANHOLE
AGP	ABOVE GRADE PIPE
EORI	END OF RECORD INFORMATION
FDC	FIRE DEPARTMENT CONNECTION
BOV	BLOW OFF VALVE
GV	GAS VALVE
ICV	IRRIGATION CONTROL VALVE
PIV	POST INDICATOR VALVE
PP	POWER POLE
(R)	AS PER UTILITY RECORD
WM	WATER METER
WV	WATER VALVE
WH	FIRE HYDRANT
END	END OF INFORMATION
LP	LIGHT POLE
EB	ELECTRIC BOX
TR	TRANSFORMER
TH	TELEPHONE HAND HOLE
TP	TELEPHONE PEDESTAL
WMH	WATER MANHOLE
SMH	SEWER MANHOLE
SM	STORM MANHOLE
RL	RECORD NITROGEN LINE
N	NITROGEN LINE
A	AIR LINE
E	ELECTRIC LINE
EL	RECORD ELECTRIC LINE
FM	FORCE MAIN LINE
FL	RECORD FORCE MAIN LINE
G	GAS LINE
GL	RECORD GAS LINE
SD	STORM DRAIN LINE
SDR	RECORD STORM DRAIN LINE
SS	SANITARY SEWER LINE
SSL	RECORD SANITARY SEWER LINE
T	TELEPHONE LINE
TEL	RECORD TELEPHONE LINE
FO	TELEPHONE FIBER OPTIC LINE
U	UNKNOWN LINE
W	WATER LINE
WL	RECORD WATER LINE

UTILITY NOTE:
THE HORIZONTAL UNDERGROUND UTILITY LINES SHOWN REPRESENT QUALITY LEVEL B SUBSURFACE UTILITY ENGINEERING SERVICES. UTILITY MARKS PLACED ON THE GROUND BY MCKIM & CREED ARE NOT TO BE USED FOR CONSTRUCTION PURPOSES. USE OF THIS INFORMATION DOES NOT RELIEVE ANY PARTY FROM THEIR OBLIGATION TO CONTACT THE UTILITY DAMAGE PREVENTION SYSTEM BEFORE DIGGING BEGINS. THIS QUALITY LEVEL B UTILITY INVENTORY DOES NOT GUARANTEE THE EXISTENCE OF EACH UTILITY OR THAT ALL THE UNDERGROUND UTILITIES HAVE BEEN ACCOUNTED FOR. EXACT HORIZONTAL AND VERTICAL POSITIONS CAN ONLY BE VERIFIED WHERE QUALITY LEVEL A (EXPOSURES) HAVE BEEN PERFORMED. SERVICES WERE PROVIDED IN ACCORDANCE WITH THE STANDARD OF PRACTICE FOR THE SUBSURFACE UTILITY ENGINEERING PROFESSION, AMERICAN SOCIETY OF CIVIL ENGINEERS STANDARD GUIDELINE FOR THE COLLECTION AND DEPICTION OF EXISTING SUBSURFACE UTILITY DATA (C/ASCE 38-02).



DATE	REVISION	INITIAL

**MCKIM & CREED**



1730 Varsity Drive Suite 500
Raleigh, North Carolina 27608
Phone: (919)233-8091, Fax: (919)233-8031
NC FIRM # F-1222
Internet Site: <http://www.mckimcreed.com>

UTILITY MAP
OF
BASF SITE
FOR
WOOD GROUP

DATE: 12/17/2021
WILMINGTON
PENDER COUNTY
NORTH CAROLINA

SCALE: 1" = 50'
Figure 3B

PROJECT # : 040820134
PROJ. SVR :
DRAWN BY : ZNG
FIELD BK :
COMP. FILE : wu01-040820134
SHEET # : 1 OF 3

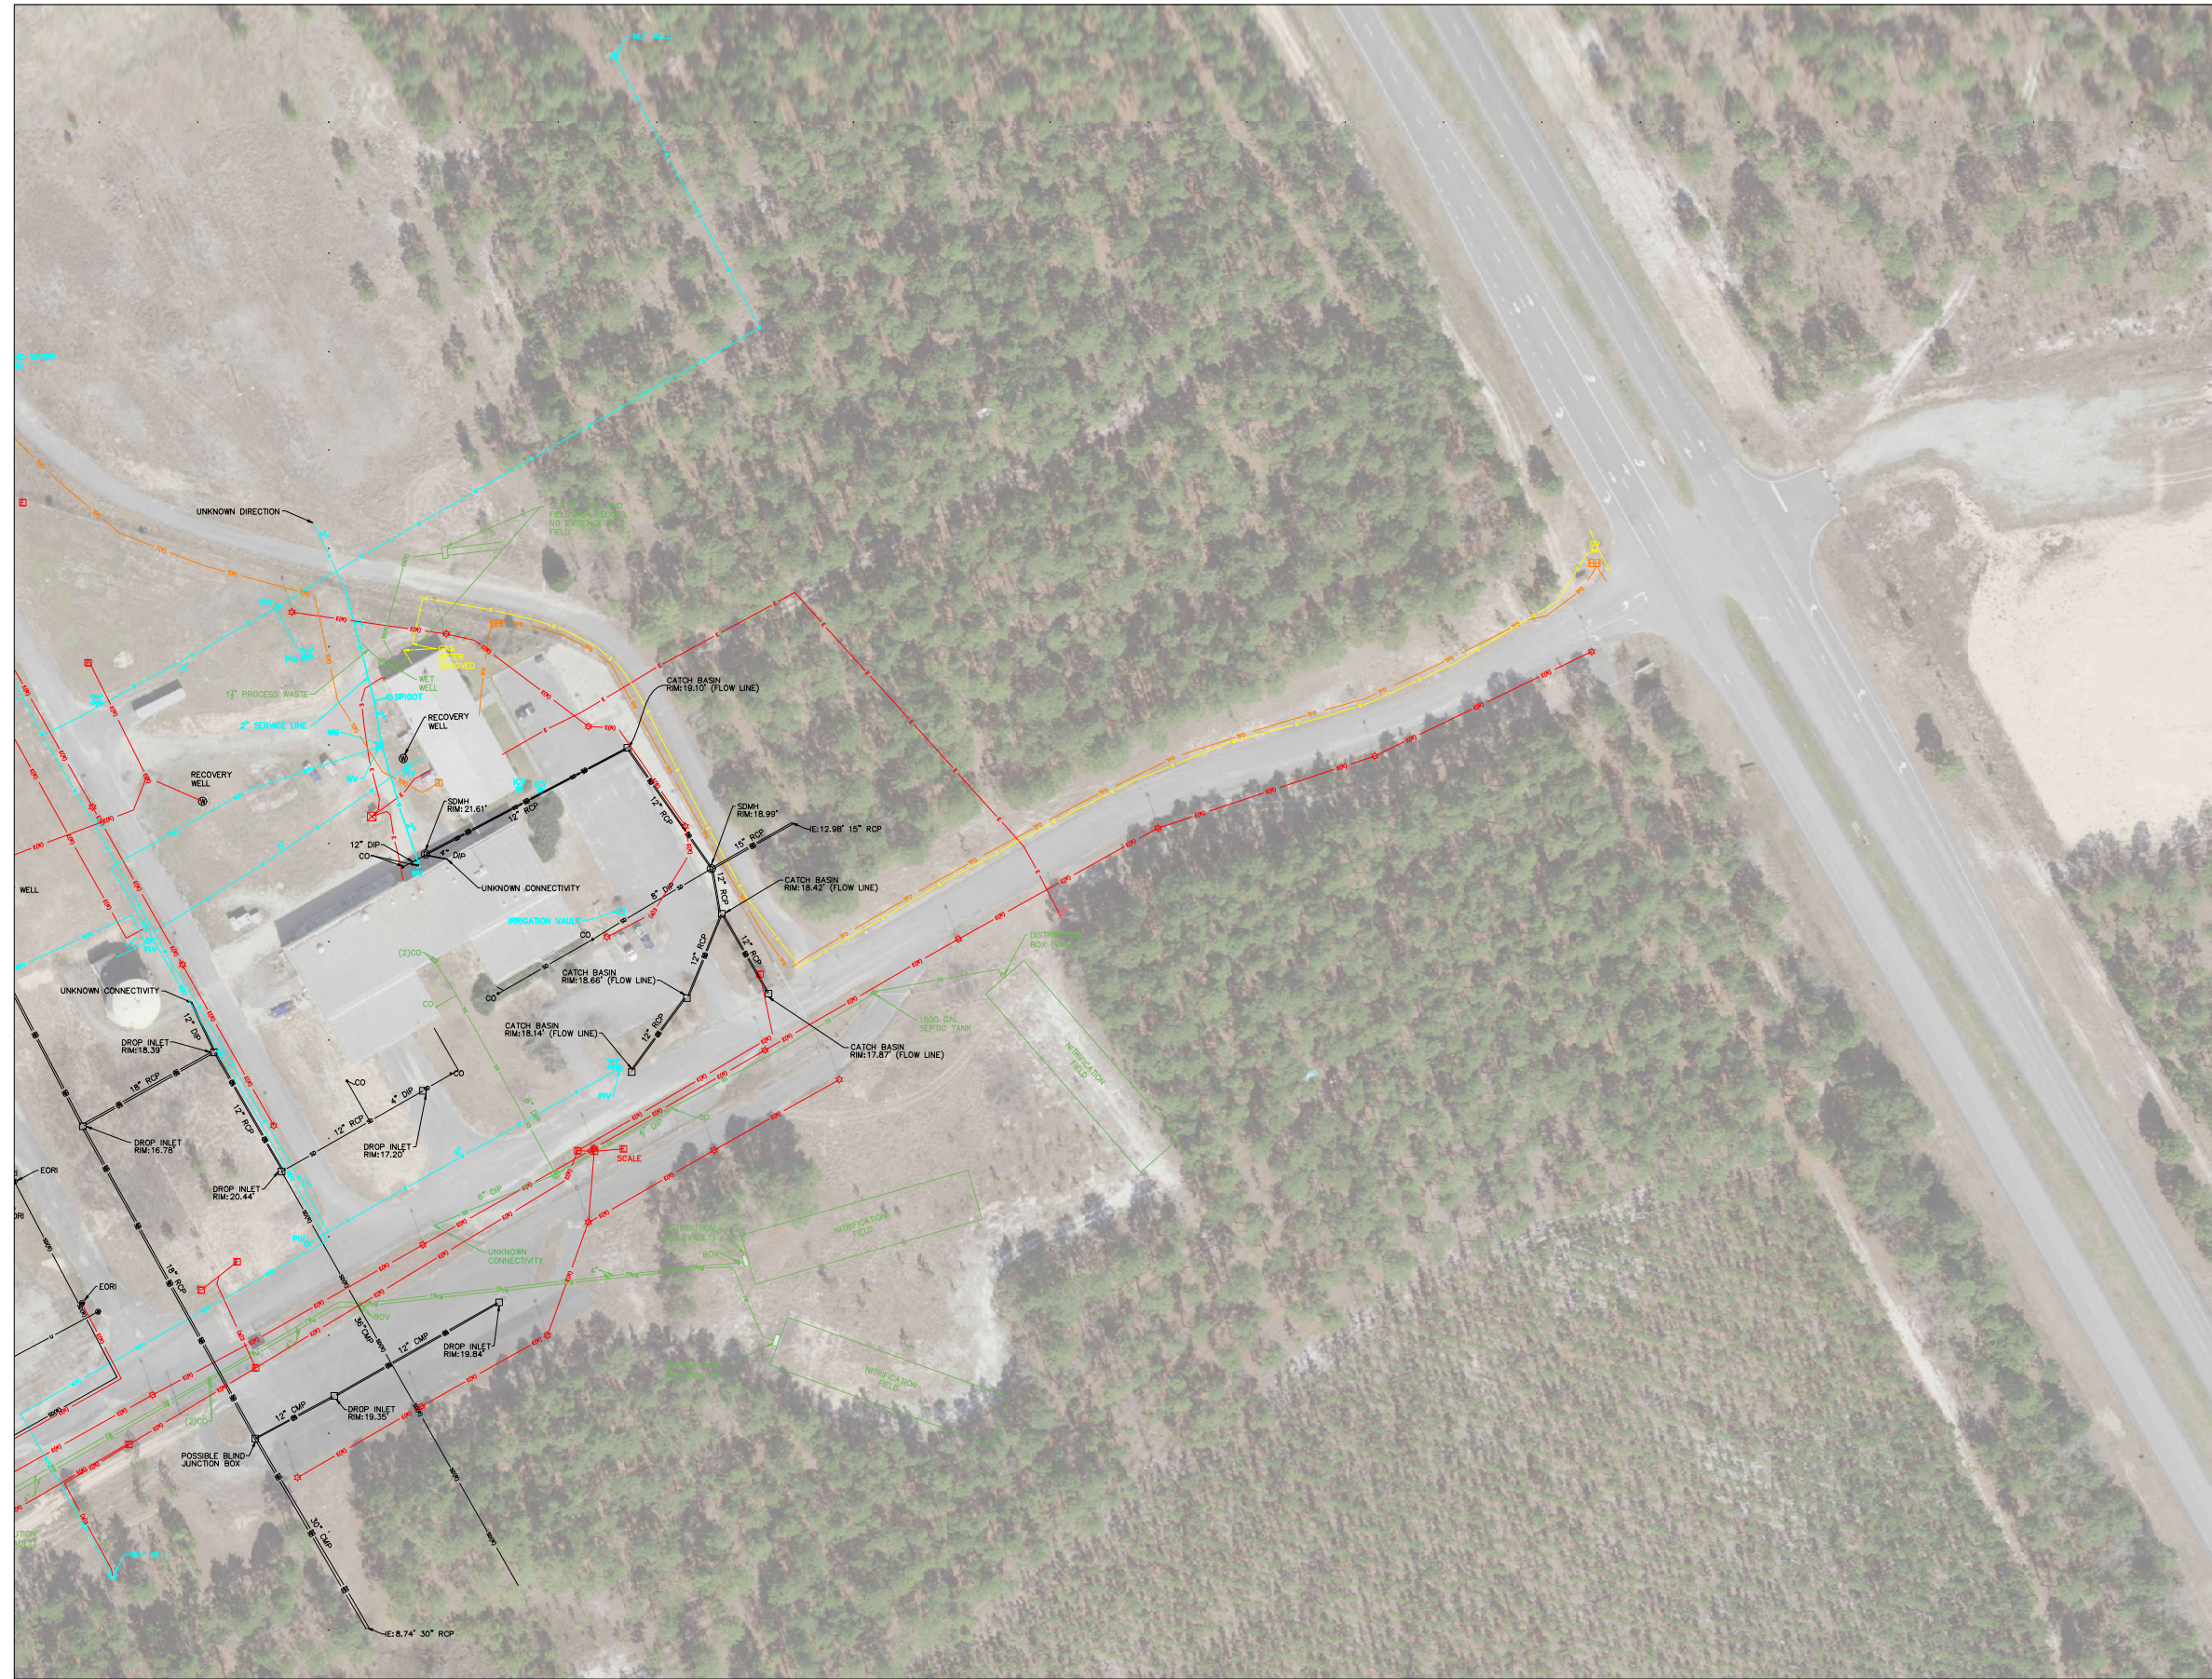

PRELIMINARY PLAT
NOT FOR RECORDATION, CONVEYANCE, OR SALES




UTILITY LEGEND

CO	CLEAN OUT
DI	DROP INLET
SSMH	SANITARY SEWER MANHOLE
SDMH	STORM DRAIN MANHOLE
AGP	ABOVE GRADE PIPE
EDR	END OF RECORD INFORMATION
FDC	FIRE DEPARTMENT CONNECTION
BOV	BLOW OFF VALVE
GV	GAS VALVE
ICV	IRRIGATION CONTROL VALVE
PV	POST INDICATOR VALVE
PP	POWER POLE
(R)	AS PER UTILITY RECORD
WM	WATER METER
WV	WATER VALVE
FX	FIRE HYDRANT
END	END OF INFORMATION
LP	LIGHT POLE
EB	ELECTRIC BOX
TR	TRANSFORMER
THH	TELEPHONE HAND HOLE
TP	TELEPHONE PEDESTAL
WMH	WATER MANHOLE
SMH	SEWER MANHOLE
SM	STORM MANHOLE
NL	RECORD NITROGEN LINE
N	NITROGEN LINE
A	AIR LINE
E	ELECTRIC LINE
EL	RECORD ELECTRIC LINE
FM	FORCE MAIN LINE
FL	RECORD FORCE MAIN LINE
G	GAS LINE
GL	RECORD GAS LINE
SD	STORM DRAIN LINE
SDL	RECORD STORM DRAIN LINE
SSL	SANITARY SEWER LINE
SSL	RECORD SANITARY SEWER LINE
T	TELEPHONE LINE
TEL	RECORD TELEPHONE LINE
FO	TELEPHONE FIBER OPTIC LINE
U	UNKNOWN LINE
W	WATER LINE
WL	RECORD WATER LINE

UTILITY NOTE:

THE HORIZONTAL UNDERGROUND UTILITY LINES SHOWN REPRESENT QUALITY LEVEL B SUBSURFACE UTILITY ENGINEERING SERVICES. UTILITY MARKS PLACED ON THE GROUND BY MCKIM & CREED ARE NOT TO BE USED FOR CONSTRUCTION PURPOSES. USE OF THIS INFORMATION DOES NOT RELIEVE ANY PARTY FROM THEIR OBLIGATION TO CONTACT THE UTILITY DAMAGE PREVENTION SYSTEM BEFORE DIGGING BEGINS. THIS QUALITY LEVEL B UTILITY INVENTORY DOES NOT GUARANTEE THE EXISTENCE OF EACH UTILITY OR THAT ALL THE UNDERGROUND UTILITIES HAVE BEEN ACCOUNTED FOR. EXACT HORIZONTAL AND VERTICAL POSITIONS CAN ONLY BE VERIFIED WHERE QUALITY LEVEL A (EXPOSURES) HAVE BEEN PERFORMED. SERVICES WERE PROVIDED IN ACCORDANCE WITH THE STANDARD OF PRACTICE FOR THE SUBSURFACE UTILITY ENGINEERING PROFESSION, AMERICAN SOCIETY OF CIVIL ENGINEERS STANDARD GUIDELINE FOR THE COLLECTION AND DEPICTION OF EXISTING SUBSURFACE UTILITY DATA (CI/ASCE 38-02).



DATE	REVISION	INITIAL



1730 Varsity Drive Suite 500
Raleigh, North Carolina 27606
Phone: (919)233-8091, Fax: (919)233-8031
NC FIRM # F-1222

Internet Site: <http://www.mckimcreed.com>

DATE:

UTILITY MAP
OF
BASF SITE
FOR
WOOD GROUP

DATE: 12/17/2021
WILMINGTON PENDER COUNTY NORTH CAROLINA

SCALE: 1" = 50'

PROJECT # : 040820134
PROJ. SVR :
DRAWN BY : ZNG
FIELD BK :
COMP. FILE : wu101-040820134
SHEET # : 2 OF 3

Figure 3C



N

N.C. GRID (NAD83/11)

VICINITY MAP
(NOT TO SCALE)

PRELIMINARY PLAT

NOT FOR RECORDATION, CONVEYANCE, OR SALES

UTILITY LEGEND	
CO	CLEAN OUT
DI	DROP INLET
SSMH	SANITARY SEWER MANHOLE
SDMH	STORM DRAIN MANHOLE
AGP	ABOVE GRADE PIPE
EORI	END OF RECORD INFORMATION
FDC	FIRE DEPARTMENT CONNECTION
BOV	BLOW OFF VALVE
GV	GAS VALVE
ICV	IRRIGATION CONTROL VALVE
PIV	POST INDICATOR VALVE
PP	POWER POLE
(R)	AS PER UTILITY RECORD
WM	WATER METER
WT	WATER VALVE
HY	FIRE HYDRANT
●	END OF INFORMATION
●	LIGHT POLE
●	ELECTRIC BOX
●	TRANSFORMER
●	TELEPHONE HAND HOLE
●	TELEPHONE PEDESTAL
●	WATER MANHOLE
●	SEWER MANHOLE
●	STORM MANHOLE
---	RECORD NITROGEN LINE
---	NITROGEN LINE
---	AIR LINE
---	ELECTRIC LINE
---	RECORD ELECTRIC LINE
---	FORCE MAIN LINE
---	RECORD FORCE MAIN LINE
---	GAS LINE
---	RECORD GAS LINE
---	STORM DRAIN LINE
---	RECORD STORM DRAIN LINE
---	SANITARY SEWER LINE
---	RECORD SANITARY SEWER LINE
---	TELEPHONE LINE
---	RECORD TELEPHONE LINE
---	TELEPHONE FIBER OPTIC LINE
---	UNKNOWN LINE
---	WATER LINE
---	RECORD WATER LINE

UTILITY NOTE:

THE HORIZONTAL UNDERGROUND UTILITY LINES SHOWN REPRESENT QUALITY LEVEL B SUBSURFACE UTILITY ENGINEERING SERVICES. UTILITY MARKS PLACED ON THE GROUND BY MCKIM & CREED ARE NOT TO BE USED FOR CONSTRUCTION PURPOSES. USE OF THIS INFORMATION DOES NOT RELIEVE ANY PARTY FROM THEIR OBLIGATION TO CONTACT THE UTILITY DAMAGE PREVENTION SYSTEM BEFORE DIGGING BEGINS. THIS QUALITY LEVEL B UTILITY INVENTORY DOES NOT GUARANTEE THE EXISTENCE OF EACH UTILITY OR THAT ALL THE UNDERGROUND UTILITIES HAVE BEEN ACCOUNTED FOR. EXACT HORIZONTAL AND VERTICAL POSITIONS CAN ONLY BE VERIFIED WHERE QUALITY LEVEL A (EXPOSURES) HAVE BEEN PERFORMED. SERVICES WERE PROVIDED IN ACCORDANCE WITH THE STANDARD OF PRACTICE FOR THE SUBSURFACE UTILITY ENGINEERING PROFESSION, AMERICAN SOCIETY OF CIVIL ENGINEERS STANDARD GUIDELINE FOR THE COLLECTION AND DEPICTION OF EXISTING SUBSURFACE UTILITY DATA (CI/ASCE 38-02).

DATE	REVISION	INITIAL

MCKIM & CREED

1730 Varsity Drive Suite 500
Raleigh, North Carolina 27608
Phone: (919)233-8091, Fax: (919)233-8031
NC FIRM # F-1222

Internet Site: <http://www.mckimcreed.com>

UTILITY MAP
OF
BASF SITE
FOR
WOOD GROUP

DATE: 12/17/2021
WILMINGTON

DATE: _____
PENDER COUNTY

SCALE: 1" = 50'
NORTH CAROLINA

PROJECT # : 040820134
PROJ. SVR :
DRAWN BY : ZNG
FIELD BK :
COMP. FILE : wu101-040820134
SHEET # : 3 OF 3

Figure 3D

LUMP SUM/UNIT RATE PROPOSAL
SECTION III GENERAL REQUIREMENTS

Specification No. 02 Decommissioning and Demolition Requirements

1 PRE-CONSTRUCTION WORK

1.1 KICKOFF MEETING

- 1.1.1 The Pender County Construction Representative (*Construction Manager*) will schedule a pre-construction kickoff meeting at the site or other convenient location before Work starts.
- 1.1.2 The meeting will provide an overview of the following project requirements:
 - 1.1.2.1 Project Scope, Schedule, Invoicing Procedure, CCO Procedure, Contractor Submittals, Working in Operating Facilities, Site Access and Security, Health and Safety, Temporary Facilities, Coordination of Work, Permit Requirements, Materials Management, QA/QC, Managing Waste.

2 MOBILIZATION & SITE PREPARATION

2.1 MOBILIZATION

- 2.1.1 Provide and setup field office(s), office supplies, sanitary facilities, change trailers, First Aid and PPE supplies, temporary power, small tools and equipment.
- 2.1.2 Coordinate with Pender County Construction Manager (Wood) the following mobilization activities:
 - 2.1.2.1 Location of field offices, sanitary facilities, lay-down areas and temporary storage facilities.
 - 2.1.2.2 The agreed to location for construction field offices, storage, site access, parking and employee entry to Facility shall be as identified in the Construction Documents and will be reaffirmed at the kickoff meeting.

3 CONSTRUCTION WORK

3.1 GENERAL

- 3.1.1 When minimum requirements for projects having minor site, mechanical or electrical scope and where more detailed technical specifications are not provided. For more complex construction work and when detailed technical specifications are provided, refer to the Technical Specifications of the Contract. If there is a conflict between these general requirements and the technical specifications, the technical specifications shall govern.

3.2 CIVIL WORK

3.2.1 Storm Water Management, Soil Erosion and Sedimentation Control

- 3.2.1.1 When required by the Specification 01, Summary of Work or the Technical Specifications of the RFP, provide necessary Storm Water, Erosion Control, and Sedimentation Control Plan and measures.

3.2.1.2 Storm Water Management, Soil Erosion and Sedimentation Control Plan

1. Implement and Adhere to the requirements of the Soil Erosion and Sedimentation Control Plan that is part of this RFP for construction.
2. Maintain copy of this plan at the site
3. At a minimum, the plan shall include:
 - Chronological completion dates for each temporary (and permanent) measure for controlling stormwater, erosion and sediment.
 - Location, type and purpose for each temporary measure to be undertaken.
 - Dates when those temporary measures will be removed.
 - Materials and equipment to be used.

3.2.1.3 Soil Erosion Control and Sedimentation Control Requirements:

1. Install erosion and sedimentation control measures in accordance with the attached Erosion and Sedimentation Control Plan prior to all construction activities.
2. Maintain control measures during earthwork activities.
3. Keep land disturbance to a minimum and schedule re-stabilization immediately after any disturbance, as is practicable.
4. Repair any failed control measure immediately. Perform maintenance as needed.
5. Remove all sedimentation and erosion control barriers after completion of construction and permanent control measures are installed.
6. Conform to all State, County and Local erosion and sedimentation control measures and as specified in the Soil Erosion, and Sedimentation Control Plan.
7. Immediately adjust or institute additional control measures if planned control measures are not effective or satisfactory to the regulatory agencies having jurisdiction.

3.2.1.4 Soil Erosion Control Measures: Measures shall include temporary berms,

diversions or other barriers including hay or straw bales, stone, silt fences or other agreed to materials that are constructed to retain sediment on-site by retarding and filtering storm runoff and prevent migration of silts and sediment to receiving waters.

1. Anchor all topsoil stockpiles with straw mulch and encircle with hay bales.
2. Silt fences or hay bales shall be installed at the toe of all critical cut and fill slopes.
3. Grade surfaces per the Contract Documents and manufacturer guidelines, prior to installation of erosion control fabric.
4. Diversion terraces shall be installed on the uphill side of disturbed areas to divert surface runoff away from unstable slopes and the project area, as may be required.
5. Interceptor channels shall be used across disturbed areas where the slope is running parallel to direction of trenches to divert runoff to outlets on lower side of disturbed area and shall be arranged to minimize erosion impact, as may be required.
6. Trench barriers of earth-filled sacks or piled stone, stacked to top of trench shall be constructed to prevent trench washout after installation of piping, if backfill operations are delayed, as may be required. Trench shall be sloped in the

direction of piping.

3.2.1.5 Sediment Control Measures

1. Periodically remove sediment from temporary control structures and permanent drainage facilities as needed.
2. Dispose of sediment per the Contract Documents. Prevent additional erosion or pollution.

3.2.2 Earthwork

3.2.2.1 Conduct all earthwork activities to mitigate dispersion of volatile organic emissions and fugitive dust beyond the Work Area.

3.2.2.2 Comply with all requirements of the Soil Erosion and Sedimentation Control Plan for the duration specified in the Plan.

3.3 MECHANICAL WORK

3.3.1 Equipment

3.3.1.1 Installation of Machinery and materials

1. Use certified shop drawings, installation drawings and manufacturer instructions when installing Machinery.
2. Mechanics shall be competent, experienced and skilled in handling, setting, aligning, leveling and adjusting the Products and shall install Products in accordance with manufacturer recommendations.
3. Use proper tools, equipment and materials to rig and assemble Products to prevent deforming or marring the surface of shafts, drive components, mating surfaces, threaded parts, etc.
4. Do not force or drive couplings, gears, sheaves, etc. on machinery shafts nor subject them to an open flame or torch. Use only oil bath heater or similar method.
5. Products shall not be altered or repaired, and no burning or welding will be permitted on any parts having machined surfaces, except by written permission of Pender County.
6. No rigging shall be done from any structure without the permission of Pender County.

3.3.1.2 Alignment & Leveling of Equipment

1. Equipment shall be carefully set and aligned on foundations to proper orientation and elevation and shimmed to true level.
2. Equipment baseframe shall be tightened to bear against shims.
3. Equipment shall be checked after securing to foundations and, after confirmation of level and elevation, shall be grouted in place.
4. Rotating equipment shall be initially aligned using stainless steel shims while equipment is free from any external loads.
5. Correctly align piping to associated equipment to prevent stress at pipe connections. Springing of pipe to align with mating equipment flanges is not permitted.
6. Misaligned holes shall be reamed. "Driving" of fasteners or keys is not permitted.
7. Check rotating equipment angular and parallel alignment and adjust to

manufacturer's specifications before testing or placing any Machinery into service.

4 SITE RESTORATION & DEMOBILIZATION

4.1 SITE RESTORATION

4.1.1 Complete site restoration in accordance with the Technical Specifications of the RFP. If not specifically specified, restore to current (or better) conditions.

4.2 DEMOBILIZATION

4.2.1 Submit an inventory listing all surplus materials.

4.2.2 Unless otherwise directed by Pender County (*or Wood*), remove all Temporary Work, tools and equipment at Work completion.

4.2.3 Properly decontaminate all tools and equipment before removal from site.

4.2.4 Properly decontaminate all supplies and materials before removal from site, or manage as waste materials in accordance with the requirements of this specification.

4.2.5 Remove all Temporary Facilities at the conclusion of the project.

5 CONTRACT CLOSEOUT

5.1 CLOSEOUT PROCEDURE

5.1.1 Notify Pender County and Facility Operations (*and AP*) when Work is Substantially Complete.

5.1.1.1 Project Summary highlighting project objectives were achieved

5.1.1.2 Health and Safety Closeout Documentation

5.1.1.3 Off-site disposal Record

5.1.1.4 Project Photographs

5.1.1.5 An assessment of the project schedule and cost variance

5.1.2 Rectify all Punch List items.

5.1.2.1 Submit detailed written resolution for each Punch List item.

5.1.3 Submit to Pender County and Wood written certification of Substantial Completion that addresses the following:

5.1.3.1 Contract Documents reviewed and updated or markups provided.

5.1.3.2 Work is complete, inspected and in accordance with Contract Documents.

5.1.3.3 Work is ready for Pender County and Wood Final inspection.

5.1.4 Accompany Pender County and Facility Operations and Wood on Final inspection and verify all Punch List items have been rectified to Pender County's and Wood's satisfaction.

5.1.5 Repeat Punch List and final inspection processes until there are no items to be addressed.

5.2 SURPLUS MATERIAL

5.2.1 Upon completion of the project, inventory surplus materials.

5.2.2 Surplus materials purchased by contractor via Lump Sum contract remains the property of the contractor and must be removed from the site.

5.3

CLOSEOUT MEETING

5.3.1 Attend Project Closeout Meeting

5.3.2 Project Closeout Meeting shall be scheduled within eight (4) weeks of project completion.